

Tube&Pipe Professional Tools





Tube & Pipe Tools

Catalog 2020

IMPORTANT!

Due to constant improvement of products presented in this catalog, the data and part numbers may change without further notice!

Most tools are available in custom-made versions. If your work requires a special solution - contact us, we will prepare a special tool.

The tube capacities given for expansion tools in this catalog, apply only for most popular cases with a standard percentage of the wall reduction. The reached capacity can be different for thicker tube sheet, harder and exotic metal tube and a higher percentage of wall reduction.

The recommended operating ranges of all cutting tools are suitable for standard pipe sizes and materials. The processing of pipes made of non-standard materials or of non-standard dimensions should be carried out after testing and with great care.

KRAIS Tube & Pipe Tools

Poland, 55-106 Zawonia, Czachowo 15
tel. +48 71 312 05 96, fax +48 71 387 03 32,
mail: export@krais.com
www.krais.com

TABLE OF CONTENT

Correct expansion guide
→ 6

Tube Hole Gauge
→ 8



LUBE-A-TUBE for better rolling
→ 8

Typical thrust collars
→ 9

Rolls for condenser expanders
→ 9

900 Series Condenser Tube Expanders
→ 10



1300 Series Condenser Tube Expanders
→ 11



800 Series Condenser Tube Expanders
→ 12



800-5 Five roll Series Condenser Tube Expanders
→ 15



1200 Series Condenser Tube Expanders
→ 17



1200L Series Condenser Tube Expanders
→ 20



1200-5 Five roll Series Condenser Tube Expanders
→ 23



F600 Series Flare Type Tube Expanders
→ 25



8012 Series Condenser Tube Expanders
→ 26



TACK Conical Expanders Series
→ 28



Special tube expanders
→ 29



Recommended motors for boiler tube expanders
→ 31

Short Mandrel's Expansion Range
→ 32

Available rolls length
→ 32

Bottle rolls
→ 32

KS Series
→ 33



PZ Series
→ 34



P2 Series
→ 35



Firetube Boiler Flaring Tube Expanders
→ 36



Parallel Expansion Firetube Expanders
→ 36



Universal Combination Roller Beading
→ 36



Colins Expander
→ 37



K20 Series
→ 38



Push&Pull K50 Series
→ 38



K60 Series
→ 39




K70 Right Angle Series
→ 40



K77 Right Angle Series
→ 40



MultipleExpand AP-S2
→ 41



MultipleExpand NAP-S4
→ 42



FlexHolder System
→ 43



TES Mini 2
→ 44



TES Mini 2 Motors
→ 45



TES-3000
→ 46



Motors for TES-3000
→ 47



TES-3000 Duo
→ 49



MOTORS FOR TES-3000 Duo
→ 49



SwiftRoll X1
→ 50



TEF – Tube End Facer
→ 52



Tool for Serrating Tube Sheet
→ 52



MWR-JGS Mini Grooving Tool
→ 53



Grooving tools for MWR-JGS
→ 54



Working ranges for universal beveling tools
→ 55

How to proper lock beveling machines
→ 56

PrepMill

→ 58



MiniMill 101

→ 60



MiniMill 201

→ 62



MiniMill 301LP

→ 64



HyperMill 56

→ 66



Auto MiniMill 101P

→ 68



Auto MiniMill 301P

→ 69



PanelMill 65

→ 70



PanelDrill

→ 72



PanelMill PF

→ 74



SmartMill-8

→ 76



PipeMill

→ 78



MiniLathe

→ 80



PipeLathe

→ 82



PipeLathe 40

→ 84



MiniDrill

→ 85



MiniDrill for finfan application

→ 86



MiniMill 300FF

→ 87



MiniMill 300GFF

→ 89



FinMill

→ 91



MFM – Manual FlangeMill

→ 93



MFML – Manual FlangeMill, long

→ 94



OMFM – Outside Mount Manual Flange Mill

→ 95



MMFM – Mini Flange Mill

→ 96



IMFM-24 Internal Mounted FlangeMill

→ 98



IMFM-40 Internal Mounted FlangeMill

→ 99



SFFM Flange Facer

→ 101



SFFM Module

→ 102



SlimFit Split Frame Clamshells

→ 103



SFSF clamshells motors

→ 105



Reaction ring for SFSF clamshells

→ 106



SFSF clamshells add-ons

→ 107



SFSF clamshells bits and holders

→ 108



Special Heads for MiniMill/HyperMill

→ 109



Special Heads for PrepMill

→ 112



Special Heads for PanelMill

→ 114



Special Heads for PanelMill PF

→ 115



Cutters and inserts

→ 116



Holders

→ 117



PanelMill & PanelMill PF holders

→ 120



MiniCut 100 – Heat exchangers

→ 121



MiniCut 300 – Condensers, chillers

→ 121



MiniCut 101/AF

→ 122



Tube Cutters for MiniCut machines

→ 122



KDM Pneumatic drill

→ 123



PTTC Universal

→ 123



PTTT – Tube trimmer

→ 123



Solid body PTTC

→ 124



ORTC - One
Revolution Tube
Cutter
→ 125



ORTCC - One
Revolution Tube
Cutter version C
→ 125



1WTTC-1000 Wheel
Type Tube Cutter
→ 126



2WTTC-1500 Two
Wheels Type Cutter
→ 130



3WTTC-2000 Three
Wheels Type Cutter
→ 132



3WTTC-3000 Three
Wheels Tube Cutter
→ 134



MWTTC - Manual
Tube Cutter
→ 136



Tube wall reducing
tool
→ 137



Pneumatic Chipping
hammer
→ 138



CT Collapsing tools
→ 138



TD Tube drift
→ 138



Manual Tube Puller
→ 139



MSP-100 Manual
Spear Puller
→ 139



MCP-100 Manual
Collet Puller
→ 140



Tube Puller
CP-1000-S
→ 141



Tube Puller
CP-1000-CC
→ 142



Tube Puller CPS-
1000
→ 143



Tube Puller
CP-1000-FF
→ 144



Tube Puller HPR20-
CP1500
→ 145



HPR-CP2000 Tube
Puller
→ 147



Super Jenny Semi-
Automatic Tube
Puller
→ 149



ACTP - Automatic
continous toolset
for pulling tubes
→ 150



HPR-30 Tube Puller
→ 151



Tube Spears for
HPR Tube Puller
→ 151



Accessories for HPR-
30 TUBE PULLERS
→ 152



HPR-30 Setup for
stubs 1 1/4" and up
→ 152



Tube SpinAIR
→ 153



CPPZ-1000
→ 154



Accessories
→ 155



Vacuum Leak Tester
KVL D-3000
→ 158




Testing pumps
→ 159



CORRECT EXPANSION GUIDE

EXPANSION FORMULA

The following formula will help you to choose the right Expander and make the right expansion.

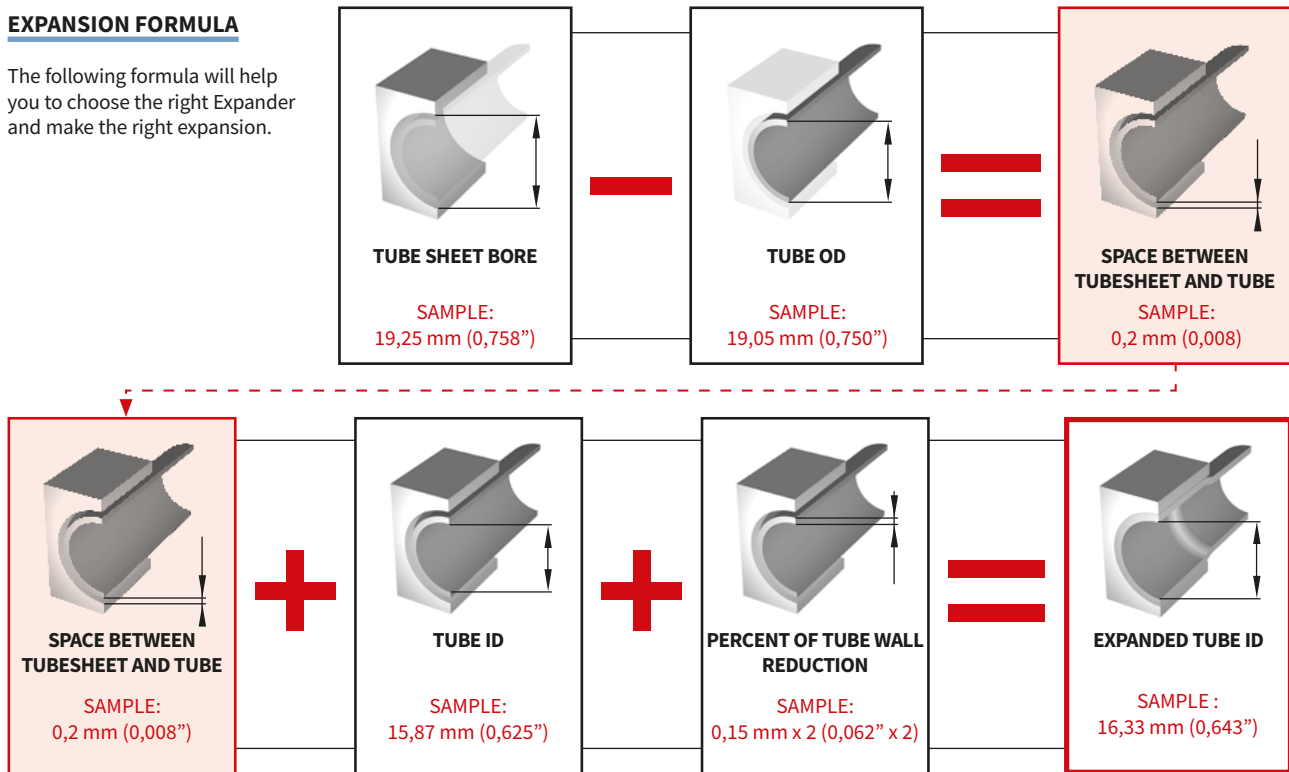

Percentage wall reduction is the most frequently used procedure to obtain the optimal mechanical joint between a Tube and Tube Sheet.


In order to calculate this reduction we must take into account the variances between the Tube OD, Tube Wall Thickness and Tube Sheet Hole Diameter. We must also consider the differing types of materials being used for both Tubes and Tube Sheets, however as a general rule, percentage wall reduction ranges between 4% - 10%.

The table illustrates the applicable percentage tube wall reductions according to the differing materials commonly used for both Tubes and Tube Sheets:

TUBE SHEET MATERIAL	TUBE MATERIAL	TUBE WALL REDUCTION
Stainless Steel	Stainless Steel	4-5%
Steel	Stainless Steel	4-5%
Steel	Steel	7%
Steel	Copper	5%
Copper	Copper	10%

For boilers tube wall thickness reduction varies between 8-16%.

ANATOMY OF ROLL

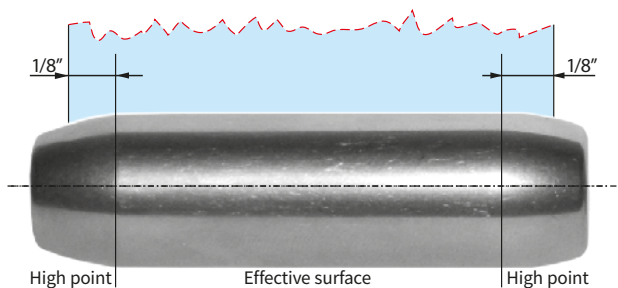

TUBE ROLLING SETUP GUIDE

The following suggestions are offered to aid in the setting up process for rolling tubes into a heat exchanger or boiler. A good start assures good end results:

1. Pick 3 to 5 tubes in the unit to be rolled and complete the formula on the page A-1. It is important that the Measurements used in the set-up are actual, never use averaged dimensions.
2. After the worksheet is finished, start setting up the torque control motor by test rolling the first of the 5 tubes. The first test roll must be done with the airetrol or electric rolling motor set for low torque to avoid over rolling.
3. Measure the tube ID after rolling. If more expansion is needed, increase the torque setting on the control and roll the second tube. Check the finished ID this step may have to be repeated on tube # 3. By this time, the torque setting should be correct.
4. Roll tubes 4 and 5 to double check the set-up. These tubes should measure as calculated within the allowable tolerance.

Condenser tubes	10-17 BWG +/- 0.001"
Condenser tubes	18-24 BWG +/- 0.0005"
Boiler tubes	4-10 BWG +/- 0.002"
Boiler tubes	12-16 BWG +/- 0.001"
5. The rolling control is now set and ready to roll the rest of the tubes in the unit. The use of the torque control system will ensure the uniform tightness of all tubes.

NOTE!


Reroll all test tubes that were under size. To ensure the best tool life and the highest quality tube to tube sheet contact, periodic cleaning of the expander is necessary. Proper lubrication of the rolls, mandrel and thrust bearing is a must!

BOILER TUBE INSTALLATION CODE

The ends of all tubes, suspension tubes, and nipples of water tube boilers and superheaters shall project through the tube sheets or headers not less than 1/4" nor more than 3/4" before flaring. Where tubes enter at an angle, the maximum limit of 3/4" shall apply only at point of least projection. The tubes shall be expanded and flared to an outside diameter of at least 1/8" greater than the diameter of the tube hole or they may be flared, rolled and welded except as provided in pwt 11.2; or rolled and seal welded without flaring provided the throat of the seal weld is not more than 3/8" and tubes are re-expanded after welding.


1. Tubes to protrude inside drum 1/4" minimum to 3/4" maximum.
2. Outside diameter of flare to be 1/8" larger than tube sheet hole.
3. Tube to be rolled past back of tube sheet 1/4" to 3/8".

SETTING CONDENSER EXPANDER

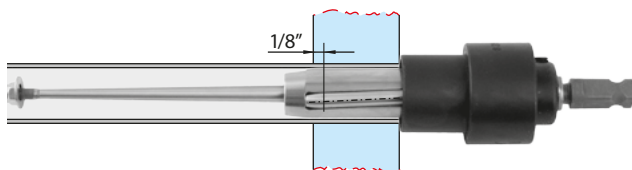


Locate high point of roll approx 1/8" inside back of tube sheet and thrust collar must be touching tube sheet.

SETTING BOILER EXPANDER

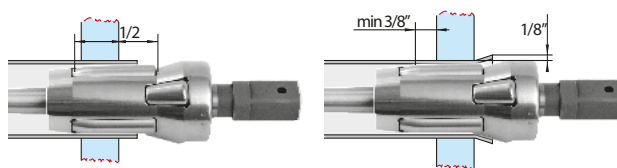

Short straight roll set approx half way into tube sheet. Tube rolled 3/8" back of tube sheet. Flared tube diameter 1/8" larger than tube sheet hole.


STEP ROLLING (THICK TUBE SHEET)

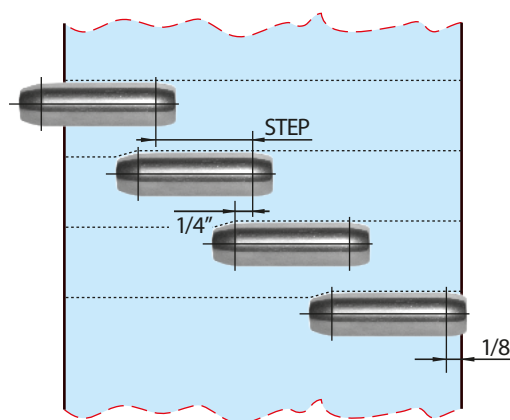

To determine length of steps, divide the estimated number of steps into the length of area to be rolled. This length must be at least 1/4" shorter than the effective length of the "2R" roll.

NOTE! 1-1/2" long rolls have maximum effective length of 1"; 2-1/4" long rolls have maximum effective length of 1-3/4"

DOUBLE TUBE SHEET APPLICATION

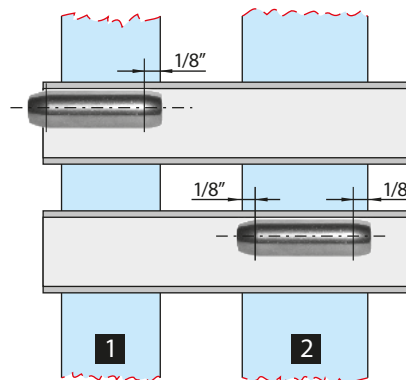

Primary tube sheet would be rolled with a 800 type expander with roll located per example.

Note! Effective length of roll to be specified based on secondary tube sheet thickness.

Secondary tube sheet would be rolled with a 1200 type expander with „2R" type rolls as per example.

Note! When rolling a secondary tube sheet always use „2R" type rolls. Position expander so that the roll straddles the tube sheet with the high points approx 1/8" inside front and sack of the tube sheet.

TUBE HOLE GAUGE


Tube Hole Gauges utilize a precision three-point contact, self-centring system, for measuring both Tube and Tube sheet ID. Our Reversible Dial Plate, allows the user to measure in both inch/decimal and metric units. Our standard adjustable depth is 4" or 8" (101 or 203 mm) dependent on model. We offer additional 8" (203 mm) reach extensions to increase the capacity of these tools for Fin Fan and similar units. All gages are furnished with both setting ring and carrying case.




SIZE*		ID RANGE				TOOL NUMBER	REACH		SETTING RING	MANDREL EXTENSION	BODY EXTENSION
		MIN		MAX							
[INCH]	[MM]	[INCH]	[MM]	[INCH]	[MM]		[INCH]	[MM]			
3/8	9,53	0,290	0,350	7,37	8,89	K200-95	4	101,6	SR-3/8	K200-95-ME	K200-95-BE
1/2	12,70	0,350	0,450	8,89	11,43	K200-127	4	101,6	SR-1/2	K200-127-ME	K200-127-BE
5/8	15,88	0,440	0,560	11,18	14,22	K200-158	4	101,6	SR-5/8	K200-158-ME	K200-158-BE
3/4	19,05	0,550	0,715	13,97	18,16	K200-190	8	203,2	SR-3/4	K200-190-ME	K200-190-BE
7/8	22,23	0,675	0,840	17,15	21,34	K200-222	8	203,2	SR-7/8	K200-222-ME	K200-222-BE
1	25,40	0,800	0,965	20,32	24,51	K200-254	8	203,2	SR-1	K200-254-ME	K200-254-BE
1 1/4	31,75	0,950	1,170	24,13	29,72	K200-317	8	203,2	SR-1-1/4	K200-317-ME	K200-317-BE
1 3/8	34,93	1,085	1,295	27,56	32,89	K200-350	8	203,2	SR-1-3/8	K200-350-ME	K200-350-BE
1 1/2	38,10	1,240	1,450	31,50	36,83	K200-381	8	203,2	SR-1-1/2	K200-381-ME	K200-381-BE
1 3/4	44,45	1,476	1,685	37,49	42,80	K200-444	8	203,2	SR-1-3/4	K200-444-ME	K200-444-BE
2	50,80	1,700	1,910	43,18	48,51	K200-508	8	203,2	SR-2	K200-508-ME	K200-508-BE
2 1/4	57,15	1,948	2,16	49,479	54,86	K200-571	8	203,2	SR-1-1/4	K200-571-ME	K200-571-BE
2 1/2	63,50	2,200	2,41	55,880	61,21	K200-635	8	203,2	SR-2-1/2	K200-635-ME	K200-635-BE
3	76,20	2,660	2,87	67,564	72,90	K200-762	8	203,2	SR-3	K200-762-ME	K200-762-BE

* other sizes on request


FREE GAUGE ADJUSTMENT

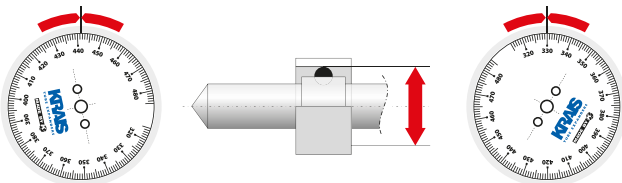

LONG VERSION (UP TO 3M)

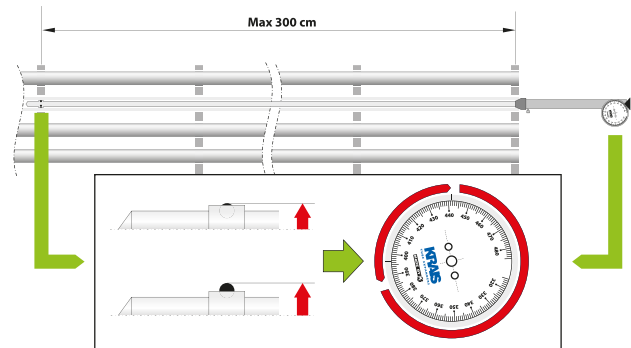


LUBE-A-TUBE FOR BETTER ROLLING




Special water soluble grease for rolling tube ends into tube sheets. Easy application: just apply directly to the inside of the tube ends; and easy removal: all Lube-A-Tube excess will be completely removed during any hydro test or boil-out operations.

- » Lube-A-Tube is easy to apply. Stays in the tube during whole rolling operation - it will not leak.
- » Lube-A-Tube does not carbonize under the heat and pressure found during the tube rolling operation.
- » Lube-A-Tube keeps the expanding tool cool what gives a long tool life.
- » Lube-A-Tube is effective for rolling condenser tubes, boiler tubes and heavy wall cracking still tubes in many environments.
- » Lube-A-Tube can be used as an "indicator" to show the operator what tubes are ready and what needs still to be expanded.


TYPICAL THRUST COLLARS




STC
Fixed recessed thrust collar 1/8". One flip type thrust collar for 1200&800 series tube expanders.



FRTC
Full recessed thrust collar.




ARTC
Adjustable recess thrust collar 0,025 – 0,5".



TWTC
Thin wall thrust collar.

ROLLS FOR CONDENSER EXPANDERS

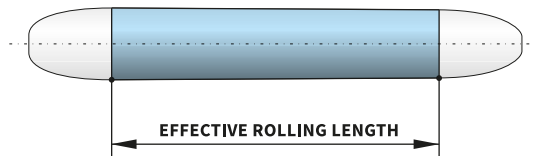

EXAMPLE	38,1	TYPE	57,1	EXAMPLE
R-7		STD		R-7-A
R-7-2R		2R		R-7-A-2R
R-7-9R		9R		R-7-A-9R
R-7-3R		3R		R-7-A-3R
R-7-BLxx		BLxx		R-7-A-BLxx
R-7-3RBLxx		3RBLxx		R-7-A-3RBLxx

FROM STOCK

ON REQUEST

900 SERIES CONDENSER TUBE EXPANDERS




BASIC INFO

Tools for expanding tubes in condensers, chillers, heat exchangers, fin fan coolers, feedwater heaters and surface condensers.


WORKING RANGE

TUBE ID	TUBE OD	TUBE SHEET
3,86 - 8,41 mm	6,35 - 9,50 MM	6,3 - 31,7 MM
0,152" - 0,331"	1/4" - 3/8"	1/4" to 1-1/4"

OPTIONAL SPARES AND ACCESSORIES



ROLLS ON REQUEST
→ PAGE 9



THRUST COLLARS
→ PAGE 9



ROLLING MOTORS
→ CHAPTER PAGE 38

TUBE OD		TUBE GAUGE			TUBE ID		EXPANSION RANGE				TUBE SHEET THICKNESS				MANDREL	MANDREL SQUARE		PNEUMATIC MOTOR *	ELECTRIC MOTOR *
											1/4 TO 3/4"		3/4 TO 1-1/4"						
							[INCH]	[MM]	[BWG]	[INCH]	[MM]	[INCH]	[MM]	MIN		MAX	MIN		
1/4	6,35	18	0,049	1,24	0,152	3,86	0,151	0,173	3,84	4,39	921	921	-	-	M-39	1/4"	6,3	K20-2500	TES3000 S6000
		19	0,042	1,07	0,166	4,22	0,165	0,185	4,19	4,70	922	923	-	-	M-39	1/4"	6,3		
		20	0,035	0,89	0,180	4,57	0,175	0,200	4,45	5,08	923	923	-	-	M-40	1/4"	6,3		
		21	0,072	1,83	0,186	4,72	0,180	0,207	4,57	5,26	924	924	-	-	M-40	1/4"	6,3		
		22	0,028	0,71	0,194	4,93	0,190	0,216	4,83	5,49	925	925	-	-	M-41	1/4"	6,3		
		23	0,025	0,64	0,200	5,08	0,195	0,222	4,95	5,64	926	923	-	-	M-41	1/4"	6,3		
		24	0,022	0,56	0,206	5,23	0,201	0,230	5,11	5,84	927	924	-	-	M-41	1/4"	6,3		
		28	0,014	0,35	0,222	5,6	0,222	0,238	5,6	6,0	928	903	-	-	928	1/4"	6,3		
		29	0,013	0,33	0,224	5,7	0,222	0,238	5,6	6,0	928	903	-	-	928	1/4"	6,3		
		30	0,012	0,30	0,226	5,7	0,222	0,238	5,6	6,0	928	903	-	-	928	1/4"	6,3		
3/8	9,5	14	0,83	2,10	0,209	5,3	0,201	0,232	5,1	5,8	927	924	-	-	M-41	1/4"	6,3	K20-1800	TES3000 S3000
		15	0,072	1,83	0,231	5,87	0,230	0,265	5,84	6,73	915	903	-	-	M-42	1/4"	6,3		
		16	0,065	1,65	0,245	6,22	0,240	0,275	6,10	6,99	916	916	916L	916L	M-36	1/4"	6,3		
		17	0,058	1,47	0,259	6,58	0,255	0,289	6,48	7,34	918	903	920	904	M-38	1/4"	6,3		
		18	0,049	1,24	0,277	7,04	0,272	0,307	6,91	7,80	901	903	902	904	M-30	1/4"	6,3		
		19	0,042	1,07	0,291	7,39	0,286	0,320	7,26	8,13	903	903	904	904	M-31	1/4"	6,3		
		20	0,035	0,89	0,305	7,75	0,300	0,334	7,62	8,48	905	907	906	908	M-32	1/4"	6,3		
		21	0,032	0,81	0,311	7,90	0,306	0,340	7,77	8,64	907	907	908	908	M-33	1/4"	6,3		
		22	0,028	0,71	0,319	8,10	0,314	0,349	7,98	8,86	909	909	910	910	M-34	1/4"	6,3		
		23	0,025	0,64	0,325	8,26	0,320	0,357	8,13	9,07	911	911	912	912	M-34	1/4"	6,3		
24	0,022	0,56	0,331	8,41	0,319	0,357	8,10	9,07	911	911	912	912	M-34	1/4"	6,3				

* Motor recommendation applies only to most popular cases with a standard percentage of the wall reduction. The recommendation can be different for thicker tube sheet, harder and exotic metal tube and a higher percentage of wall reduction.

1300 SERIES CONDENSER TUBE EXPANDERS




BASIC INFO

Tools for expanding tubes in condensers, chillers, heat exchangers, fin fan coolers, feedwater heaters and surface condensers.

WORKING RANGE


TUBE ID	TUBE OD	TUBE SHEET
5,87 - 8,41 mm	9,5 MM	6,3 - 31,7 MM
0,231" - 0,331"	3/8"	3/4" to 1-1/4"

OPTIONAL SPARES AND ACCESSORIES



ROLLS ON REQUEST

→ PAGE 9



THRUST COLLARS

→ PAGE 9



ROLLING MOTORS

→ CHAPTER PAGE 38

TUBE OD		TUBE GAUGE			TUBE ID		EXPANSION RANGE				TUBE SHEET THICKNESS				MANDREL	MANDREL SQUARE		PNEUMATIC MOTOR	ELECTRIC MOTOR
											1/4 TO 3/4"		3/4 TO 1-1/4"						
							[INCH]	[MM]	[BWG]	[INCH]	[MM]	[INCH]	[MM]	MIN		MAX	MIN		
3/8	9,5	15	0,072	1,83	0,231	5,87	0,230	0,265	5,84	6,73	1315	1315	1316	1316	M-86	1/4"	6,3	K20-1800	TES3000 S3000
		16	0,065	1,65	0,245	6,22	0,240	0,275	6,10	6,99	1319	1315	1319-L	916-L	M-86	1/4"	6,3		
		17	0,058	1,47	0,259	6,58	0,255	0,289	6,48	7,34	1317	903	1318	904	M-88	1/4"	6,3		
		18	0,049	1,24	0,277	7,04	0,272	0,307	6,91	7,80	1301	903	1302	904	M-80	1/4"	6,3		
		19	0,042	1,07	0,291	7,39	0,286	0,320	7,26	8,13	1303	903	1304	904	M-81	1/4"	6,3		
		20	0,035	0,89	0,305	7,75	0,300	0,334	7,62	8,48	1305	907	1306	908	M-82	1/4"	6,3		
		21	0,032	0,81	0,311	7,90	0,306	0,340	7,77	8,64	1307	907	1308	908	M-83	1/4"	6,3		
		22	0,028	0,71	0,319	8,10	0,314	0,349	7,98	8,86	1309	909	1310	910	M-84	1/4"	6,3		
		23	0,025	0,64	0,325	8,26	0,320	0,357	8,13	9,07	1311	911	1312	912	M-84	1/4"	6,3		
		24	0,022	0,56	0,331	8,41	0,319	0,357	8,10	9,07	1311	911	1312	912	M-84	1/4"	6,3		

* Motor recommendation applies only to most popular cases with a standard percentage of the wall reduction. The recommendation can be different for thicker tube sheet, harder and exotic metal tube and a higher percentage of wall reduction.

800 SERIES CONDENSER TUBE EXPANDERS




BASIC INFO

Tools for expanding tubes in condensers, chillers, heat exchangers, fin fan coolers, feedwater heaters and surface condensers. As a standard expanders are supplied with STC collar. Available in regular and long reaches and as the 5-rolls version for rolling thin walls. Many different shaped rolls are available.

WORKING RANGE


TUBE ID	TUBE OD	TUBE SHEET
8,48 - 26,9 mm	12,7 - 38,1 MM	12,7 - 57,1 MM
0,334" - 1,027"	1/2" to 1-1/2"	1/2" to 2-1/4"

OPTIONAL SPARES AND ACCESSORIES



ROLLS ON REQUEST

→ PAGE 9



THRUST COLLARS

→ PAGE 9



ROLLING MOTORS

→ CHAPTER PAGE 38

TUBE OD		TUBE GAUGE			TUBE ID		EXPANSION RANGE				TUBE SHEET THICKNESS				MANDREL	MANDREL SQUARE		PNEUMATIC MOTOR *	ELECTRIC MOTOR *	
											1/2 TO 1-1/2"		1-1/4 TO 2-1/4"							
							[INCH]	[MM]	[BWG]	[INCH]	[MM]	[INCH]	[MM]	MIN		MAX	MIN			MAX
1/2	12,7	14	0,083	2,11	0,334	8,48	0,324	0,374	8,23	9,50	797	797	-	-	797	3/8	9,5	K20-500	TES3000 S1500 or TESMini2 HTO	
		15	0,072	1,83	0,356	9,04	0,348	0,398	8,84	10,11	799	R-1	-	-	799	3/8	9,5			
		16	0,065	1,65	0,370	9,40	0,36	0,410	9,14	10,41	801	R-1	-	-	M-1	3/8	9,5	K20-1800		
		17	0,058	1,47	0,384	9,75	0,374	0,424	9,50	10,77	803	R-2	-	-	M-1	3/8	9,5			
		18	0,049	1,24	0,402	10,21	0,392	0,447	9,96	11,35	805	R-3	-	-	M-2	3/8	9,5			
		20	0,035	0,89	0,430	10,92	0,406	0,461	10,31	11,71	805[S]	R-3	-	-	M-3	3/8	9,5			
5/8	15,8	12	0,109	2,77	0,407	10,34	0,392	0,447	9,96	11,35	805	R-3	-	-	M-2	3/8	9,5	K50-600	TES3000 G1450 or TesMini2 ES2	
		13	0,095	2,41	0,435	11,05	0,425	0,480	10,80	12,19	807	R-4	-	-	M-3	3/8	9,5			
		14	0,083	2,11	0,459	11,66	0,449	0,509	11,40	12,93	809	R-4	810	R-4-A	M-4	3/8	9,5			
		15	0,072	1,83	0,481	12,22	0,471	0,536	11,96	13,61	811	R-5	812	R-5A	M-5	3/8	9,5			
		16	0,065	1,65	0,495	12,57	0,485	0,550	12,32	13,97	813	R-6	814	R-6A	M-5	3/8	9,5	K50-1250		
		17	0,058	1,47	0,509	12,93	0,499	0,564	12,67	14,33	815	R-6	816	R-6A	M-6	3/8	9,5			
		18	0,049	1,24	0,527	13,39	0,517	0,572	13,13	14,53	817	R-7	818	R-7-A	M-7	3/8	9,5			
		19	0,042	1,07	0,541	13,74	0,522	0,582	13,26	14,78	819	R-7	820	R-7-A	M-6	3/8	9,5			
		20	0,035	0,89	0,555	14,10	0,536	0,596	13,61	15,14	819[S]	R-7	820[S]	R-7-A	M-8	3/8	9,5			
		21	0,032	0,81	0,561	14,25	0,536	0,596	13,61	15,14	819[S]	R-7	820[S]	R-7-A	M-8	3/8	9,5			
3/4	19	22	0,028	0,71	0,569	14,45	0,536	0,596	13,61	15,14	819[S]	R-7	820[S]	R-7-A	M-8	3/8	9,5	K60-900	TES3000 + G1000, TESMini 2 +ES2	
		10	0,134	3,40	0,482	12,24	0,471	0,536	11,96	13,61	811	R-5	812	R-5-A	M-5	3/8	9,5			
		11	0,120	3,05	0,510	12,95	0,499	0,564	12,67	14,33	815	R-6	816	R-6-A	M-6	3/8	9,5			
		12	0,109	2,77	0,532	13,51	0,522	0,582	13,26	14,78	819	R-7	820	R-7-A	M-6	3/8	9,5	K50-400		TES3000 G1450 or TESMini2 ES2
		13	0,095	2,41	0,560	14,22	0,550	0,615	13,97	15,62	821	R-8	822	R-8-A	M-8	3/8	9,5			
		14	0,083	2,11	0,584	14,83	0,574	0,639	14,58	16,23	823	R-9	824	R-9-A	M-8	3/8	9,5	K50-600		
		15	0,072	1,83	0,606	15,39	0,596	0,661	15,14	16,79	825	R-10	826	R-10-A	M-8	3/8	9,5			
		16	0,065	1,65	0,620	15,75	0,605	0,685	15,37	17,40	827	R-10	828	R-10-A	M-9	3/8	9,5	K50-1250		
		17	0,058	1,47	0,634	16,10	0,619	0,699	15,72	17,75	829	R-11	830	R-11-A	M-9	3/8	9,5			
		18	0,049	1,24	0,652	16,56	0,619	0,699	15,72	17,75	829	R-11	830	R-11-A	M-9	3/8	9,5			
		19	0,042	1,07	0,666	16,92	0,642	0,722	16,31	18,34	831	R-12	832	R-12-A	M-9	3/8	9,5			
		20	0,035	0,89	0,680	17,27	0,642	0,722	16,31	18,34	831	R-12	832	R-12-A	M-9	3/8	9,5			
21	0,032	0,81	0,686	17,42	0,642	0,722	16,31	18,34	831	R-12	832	R-12-A	M-9	3/8	9,5					
22	0,028	0,71	0,694	17,63	0,642	0,722	16,31	18,34	831	R-12	832	R-12-A	M-9	3/8	9,5					

TUBE OD		TUBE GAUGE			TUBE ID		EXPANSION RANGE				TUBE SHEET THICKNESS				MANDREL	MANDREL SQUARE		PNEUMATIC MOTOR *	ELECTRIC MOTOR *	
											1/2 TO 1-1/2"		1-1/4 TO 2-1/4"							
							[INCH]	[MM]	[BWG]	[INCH]	[MM]	[INCH]	[MM]	MIN		MAX	MIN			MAX
7/8	22,2	10	0,134	3,40	0,607	15,42	0,596	0,661	15,14	16,79	825	R-10	826	R-10-A	M-8	3/8	9,5	K50-400	TES3000 G1000 or TESMini2 ES2	
		11	0,120	3,05	0,635	16,13	0,619	0,699	15,72	17,75	829	R-11	830	R-11-A	M-9	3/8	9,5			
		12	0,109	2,77	0,657	16,69	0,642	0,722	16,31	18,34	831	R-12	832	R-12-A	M-9	3/8	9,5			
		13	0,095	2,41	0,685	17,40	0,670	0,750	17,02	19,05	833	R-13	834	R-13-A	M-10	3/8	9,5			
		14	0,083	2,11	0,709	18,01	0,685	0,774	17,40	19,66	835	R-14	836	R-14-A	M-11	3/8	9,5	K50-600		
		15	0,072	1,83	0,731	18,57	0,712	0,801	18,08	20,35	837	R-15	838	R-15-A	M-11	3/8	9,5			
		16	0,065	1,65	0,745	18,92	0,726	0,815	18,44	20,70	839	R-15	840	R-15-A	M-12	3/8	9,5			
		17	0,058	1,47	0,759	19,28	0,740	0,829	18,80	21,06	843	R-16	844	R-16-A	M-12	3/8	9,5			
18	0,049	1,24	0,777	19,74	0,740	0,829	18,80	21,06	843	R-16	844	R-16-A	M-12	3/8	9,5	K50-1250	TES3000 G1450 or TESMini2 ES2			
1	25,4	8	0,165	4,19	0,670	17,02	0,655	0,735	16,64	18,67	841	R-13	842	R-13-A	M-9	3/8	9,5	K60-400	TES3000 G1000 or TESMini2 ES2	
		9	0,148	3,76	0,704	17,88	0,685	0,774	17,40	19,66	835	R-14	836	R-14-A	M-11	3/8	9,5			
		10	0,134	3,40	0,732	18,59	0,712	0,801	18,08	20,35	837	R-15	838	R-15-A	M-11	3/8	9,5			
		11	0,120	3,05	0,760	19,30	0,740	0,829	18,80	21,06	843	R-16	844	R-16-A	M-12	3/8	9,5			
		12	0,109	2,77	0,782	19,86	0,763	0,852	19,38	21,64	845	R-17	846	R-17-A	M-12	3/8	9,5	K50-400		
		13	0,095	2,41	0,810	20,57	0,791	0,880	20,09	22,35	847	R-18	848	R-18-A	M-12	3/8	9,5			
		14	0,083	2,11	0,834	21,18	0,810	0,909	20,57	23,09	849	R-18	850	R-18-A	M-13	3/8	9,5			
		15	0,072	1,83	0,856	21,74	0,837	0,936	21,26	23,77	851	R-19	852	R-19-A	M-13	3/8	9,5			
		16	0,065	1,65	0,870	22,10	0,837	0,936	21,26	23,77	851	R-19	852	R-19-A	M-13	3/8	9,5	K50-600		
		17	0,058	1,47	0,884	22,45	0,865	0,964	21,97	24,49	855	R-21	856	R-21-A	M-13	3/8	9,5			
		18	0,049	1,24	0,902	22,91	0,865	0,964	21,97	24,49	855	R-21	856	R-21-A	M-13	3/8	9,5			
		19	0,042	1,07	0,916	23,27	0,865	0,964	21,97	24,49	855	R-21	856	R-21-A	M-13	3/8	9,5			
20	0,035	0,89	0,930	23,62	0,865	0,964	21,97	24,49	855	R-21	856	R-21-A	M-13	3/8	9,5					
1-1/8	28,5	8	0,165	4,19	0,795	20,19	0,776	0,875	19,71	22,23	853	R-20	854	R-20-A	M-13	3/8	9,5	K60-400	TES3000 G1000 or TESMini2 DU1	
		9	0,148	3,76	0,829	21,06	0,810	0,909	20,57	23,09	849	R-18	850	R-18-A	M-13	3/8	9,5			
		10	0,134	3,40	0,857	21,77	0,837	0,936	21,26	23,77	851	R-19	852	R-19-A	M-13	3/8	9,5			
		11	0,120	3,05	0,885	22,48	0,865	0,964	21,97	24,49	855	R-21	856	R-21-A	M-13	3/8	9,5			
		12	0,109	2,77	0,907	23,04	0,883	0,982	22,43	24,94	857	R-21	858	R-21-A	M-14	1/2	12,7			
		13	0,095	2,41	0,935	23,75	0,916	1,015	23,27	25,78	859	R-22	860	R-22-A	M-14	1/2	12,7			
		14	0,083	2,11	0,959	24,36	0,935	1,044	23,75	26,52	861	R-23	862	R-23-A	M-15	1/2	12,7			
		15	0,072	1,83	0,981	24,92	0,962	1,071	24,43	27,20	863	R-24	864	R-24-A	M-15	1/2	12,7			
		16	0,065	1,65	0,995	25,27	0,962	1,071	24,43	27,20	863	R-24	864	R-24-A	M-15	1/2	12,7			
		17	0,058	1,47	1,009	25,63	0,990	1,099	25,15	27,91	867	R-26	868	R-26-A	M-16	1/2	12,7			
18	0,049	1,24	1,027	26,09	0,990	1,099	25,15	27,91	867	R-26	868	R-26-A	M-16	1/2	12,7					
1-1/4	31,7	8	0,165	4,19	0,92	23,37	0,901	1,010	22,89	25,65	865	R-25	866	R-25-A	M-15	1/2	12,7	K60-400	TES3000 G1000 or TESMini2 DU1	
		9	0,148	3,76	0,954	24,23	0,935	1,044	23,75	26,52	861	R-23	862	R-23-A	M-15	1/2	12,7			
		10	0,134	3,40	0,982	24,94	0,962	1,071	24,43	27,20	863	R-24	864	R-24-A	M-15	1/2	12,7			
		11	0,120	3,05	1,010	25,65	0,990	1,099	25,15	27,91	867	R-26	868	R-26-A	M-16	1/2	12,7			
		12	0,109	2,77	1,032	26,21	1,013	1,122	25,73	28,50	869	R-27	870	R-27-A	M-16	1/2	12,7			
		13	0,095	2,41	1,060	26,92	1,041	1,150	26,44	29,21	871	R-28	872	R-28-A	M-17	1/2	12,7			
		14	0,083	2,11	1,084	27,53	1,060	1,169	26,92	29,69	873	R-29	874	R-29-A	M-17	1/2	12,7			
		15	0,072	1,83	1,106	28,09	1,087	1,196	27,61	30,38	875	R-30	876	R-30-A	M-17	1/2	12,7			
		16	0,065	1,65	1,12	28,45	1,087	1,196	27,61	30,38	875	R-30	876	R-30-A	M-17	1/2	12,7			
		17	0,058	1,47	1,134	28,80	1,115	1,224	28,32	31,09	879	R-30	880	R-30-A	M-18	1/2	12,7			
18	0,049	1,24	1,152	29,26	1,115	1,224	28,32	31,09	879	R-30	880	R-30-A	M-18	1/2	12,7					
1-3/8	34,9	8	0,165	4,19	1,045	26,54	1,026	1,135	26,06	28,83	877	R-31	878	R-31-A	M-17	1/2	12,7	K60-250	TES3000 G400 or TESMini2 DU1	
		9	0,148	3,76	1,079	27,41	1,060	1,169	26,92	29,69	873	R-29	874	R-29-A	M-17	1/2	12,7			
		10	0,134	3,40	1,107	28,12	1,087	1,196	27,61	30,38	875	R-30	876	R-30-A	M-17	1/2	12,7			
		11	0,120	3,05	1,135	28,83	1,115	1,224	28,32	31,09	879	R-30	880	R-30-A	M-18	1/2	12,7			
		12	0,109	2,77	1,157	29,39	1,133	1,242	28,78	31,55	881	R-32	882	R-32-A	M-18	1/2	12,7			
		13	0,095	2,41	1,185	30,10	1,160	1,275	29,46	32,39	883	R-33	884	R-33-A	M-19	1/2	12,7			K60-400
		14	0,083	2,11	1,209	30,71	1,179	1,294	29,95	32,87	885	R-34	886	R-34-A	M-20	1/2	12,7			
		15	0,072	1,83	1,231	31,27	1,206	1,321	30,63	33,55	887	R-35	888	R-35-A	M-20	1/2	12,7			
16	0,065	1,65	1,245	31,62	1,206	1,321	30,63	33,55	887	R-35	888	R-35-A	M-20	1/2	12,7					

TUBE OD		TUBE GAUGE			TUBE ID		EXPANSION RANGE				TUBE SHEET THICKNESS				MANDREL	MANDREL SQUARE		PNEUMATIC MOTOR *	ELECTRIC MOTOR *
											1/2 TO 1-1/2"		1-1/4 TO 2-1/4"						
							[INCH]		[MM]		12,7 TO 38,1 MM		31,7 TO 57,1 MM						
[INCH]	[MM]	[BWG]	[INCH]	[MM]	[INCH]	[MM]	MIN	MAX	MIN	MAX	TOOL NO.	ROLL NO.	TOOL NO.	ROLL NO.		[INCH]	[MM]		
1-1/2	38,1	8	0,165	4,19	1,170	29,72	1,145	1,260	29,08	32,00	889	R-34	890	R-34-A	M-19	1/2	12,7	K60-250	TES3000 G400 or TESMini2 DU1
		9	0,148	3,76	1,204	30,58	1,179	1,294	29,95	32,87	885	R-34	886	R-34-A	M-20	1/2	12,7		
		10	0,134	3,40	1,232	31,29	1,206	1,321	30,63	33,55	887	R-35	888	R-35-A	M-20	1/2	12,7		
		11	0,120	3,05	1,260	32,00	1,235	1,350	31,37	34,29	891	R-36	892	R-36-A	M-20	1/2	12,7		
		12	0,109	2,77	1,282	32,56	1,257	1,372	31,93	34,85	893	R-37	894	R-37-A	M-20	1/2	12,7		
		13	0,095	2,41	1,310	33,27	1,285	1,400	32,64	35,56	895	R-37	896	R-37-A	M-21	1/2	12,7	K60-400	
		14	0,083	2,11	1,334	33,88	1,285	1,400	32,64	35,56	895	R-37	896	R-37-A	M-21	1/2	12,7		
		15	0,072	1,83	1,356	34,44	1,331	1,446	33,81	36,73	897	R-38	898	R-38-A	M-21	1/2	12,7		
		16	0,065	1,65	1,370	34,80	1,331	1,446	33,81	36,73	897	R-38	898	R-38-A	M-21	1/2	12,7		
		17	0,058	1,47	1,384	35,15	1,331	1,472	33,81	37,39	899	R-38	900	R-38-A	M-22	1/2	12,7		
		18	0,049	1,24	1,402	35,61	1,331	1,472	33,81	37,39	899	R-38	900	R-38-A	M-22	1/2	12,7		
		19	0,042	1,07	1,416	35,97	1,331	1,472	33,81	37,39	899	R-38	900	R-38-A	M-22	1/2	12,7		
		20	0,035	0,89	1,430	36,32	1,331	1,472	33,81	37,39	899	R-38	900	R-38-A	M-22	1/2	12,7		

* Motor recommendation applies only to most popular cases with a standard percentage of the wall reduction. The recommendation can be different for thicker tube sheet, harder and exotic metal tube and a higher percentage of wall reduction.

800-5 FIVE ROLL SERIES CONDENSER TUBE EXPANDERS



BASIC INFO


Tools for expanding tubes in condensers, chillers, heat exchangers, fin fan coolers, feedwater heaters and surface condensers.

As a standard expanders are supplied with STC collar. Available in regular and long reaches and as the 3-rolls version. Many different shaped rolls are available.

WORKING RANGE


TUBE ID	TUBE OD	TUBE SHEET
12,98 - 36,68 MM	15,8 - 38,1 MM	12,7 - 57,1 MM
0,509" - 1,440"	5/8" to 1-1/2"	1/2" to 2-1/4"

OPTIONAL SPARES AND ACCESSORIES



ROLLS ON REQUEST

→ PAGE 9



THRUST COLLARS

→ PAGE 9



ROLLING MOTORS

→ CHAPTER PAGE 38

TUBE OD		TUBE GAUGE		TUBE ID		EXPANSION RANGE				TUBE SHEET THICKNESS				MANDREL	MANDREL SQUARE		PNEUMATIC MOTOR *	ELECTRIC MOTOR *	
										1/2" TO 1-1/2"		1-1/4" TO 2-1/4"							
						[INCH]	[MM]	[INCH]	[MM]	[INCH]	[MM]	MIN	MAX		MIN	MAX			TOOL NO.
5/8	15,8	17	0,058	1,47	0,509	12,93	0,499	0,564	12,67	14,33	815-5	R-4-5	816-5	R-4-A-5	M-816-5	3/8	9,5	K50-1250	TES3000 G1000 or TESMini2 DUO
		18	0,049	1,24	0,527	13,39	0,517	0,572	13,13	14,53	817-5	R-4-5	818-5	R-4-A-5	M-9	3/8	9,5		
		19	0,042	1,07	0,541	13,74	0,522	0,582	13,26	14,78	819-5	R-4-5	820-5	R-4-A-5	M-820-5	3/8	9,5		
		20	0,035	0,89	0,555	14,10	0,536	0,596	13,61	15,14	819-5[S]	R-4-5	820-5[S]	R-4-A-5	820-5[S]	3/8	9,5		
		21	0,032	0,81	0,561	14,25	0,536	0,596	13,61	15,14	819-5[S]	R-4-5	820-5[S]	R-4-A-5	820-5[S]	3/8	9,5		
		22	0,028	0,71	0,569	14,45	0,536	0,596	13,61	15,14	819-5[S]	R-4-5	820-5[S]	R-4-A-5	820-5[S]	3/8	9,5		
3/4	19,0	13	0,095	2,41	0,560	14,22	0,550	0,615	13,97	15,62	821-5	R-5-5	822-5	R-5-A-5	M-822-5	3/8	9,5	K50-600	TES3000 + G1450 TesMini2 + ES2
		14	0,083	2,11	0,584	14,83	0,574	0,639	14,58	16,23	823-5	R-6-5	824-5	R-6-A-5	M-824-5	3/8	9,5		
		15	0,072	1,83	0,606	15,39	0,590	0,661	14,99	16,79	825-5	R-7-5	826-5	R-7-A-5	M-826-5	3/8	9,5		
		16	0,065	1,65	0,620	15,75	0,605	0,685	15,37	17,40	827-5	R-7-5	828-5	R-7-A-5	M-13	3/8	9,5	K50-1250	TES3000 G1000 or TESMini2 DUO
		17	0,058	1,47	0,634	16,10	0,619	0,699	15,72	17,75	829-5	R-7-5	830-5	R-7-A-5	M-830-5	3/8	9,5		
		18	0,049	1,24	0,652	16,56	0,619	0,699	15,72	17,75	829-5	R-7-5	830-5	R-7-A-5	M-830-5	3/8	9,5		
		19	0,042	1,07	0,666	16,92	0,642	0,722	16,31	18,34	831-5	R-9-5	832-5	R-9-A-5	M-13	3/8	9,5		
		20	0,035	0,89	0,680	17,27	0,642	0,722	16,31	18,34	831-5	R-9-5	832-5	R-9-A-5	M-13	3/8	9,5		
		21	0,032	0,81	0,686	17,42	0,642	0,722	16,31	18,34	831-5	R-9-5	832-5	R-9-A-5	M-13	3/8	9,5		
		22	0,028	0,71	0,694	17,63	0,642	0,722	16,31	18,34	831-5	R-9-5	832-5	R-9-A-5	M-13	3/8	9,5		
7/8	22,2	13	0,095	2,41	0,685	17,40	0,670	0,750	17,02	19,05	833-5	R-9-5	834-5	R-9-A-5	M-14-3/8	3/8	9,5	K50-600	TES3000 G1450 or TESMini2 ES2
		14	0,083	2,11	0,709	18,01	0,685	0,774	17,40	19,66	835-5	R-10-5	836-5	R-10-A-5	M-15	3/8	9,5		
		16	0,065	1,65	0,745	18,92	0,726	0,815	18,44	20,70	839-5	R-11-5	840-5	R-11-A-5	M-840-5	3/8	9,5		
		17	0,058	1,47	0,759	19,28	0,740	0,829	18,80	21,06	843-5	R-11-5	844-5	R-11-A-5	M-17-3/8	3/8	9,5	K50-1250	TES3000 G1000 or TESMini2 DUO
		18	0,049	1,24	0,777	19,74	0,740	0,829	18,80	21,06	843-5	R-11-5	844-5	R-11-A-5	M-17-3/8	3/8	9,5		
		19	0,042	1,07	0,791	20,09	0,763	0,852	19,38	21,64	845-5	R-11-5	846-5	R-11-A-5	M-18-3/8	3/8	9,5		
		20	0,035	0,89	0,805	20,45	0,763	0,852	19,38	21,64	845-5	R-11-5	846-5	R-11-A-5	M-18-3/8	3/8	9,5		
		21	0,032	0,81	0,811	20,60	0,763	0,852	19,38	21,64	845-5	R-11-5	846-5	R-11-A-5	M-18-3/8	3/8	9,5		
		22	0,028	0,71	0,819	20,80	0,763	0,852	19,38	21,64	845-5	R-11-5	846-5	R-11-A-5	M-18-3/8	3/8	9,5		

TUBE OD		TUBE GAUGE		TUBE ID		EXPANSION RANGE				TUBE SHEET THICKNESS				MANDREL	MANDREL SQUARE		PNEUMATIC MOTOR *	ELECTRIC MOTOR *	
										1/2" TO 1-1/2"		1-1/4" TO 2-1/4"							
						[INCH]	[MM]	[INCH]	[MM]	[INCH]	[MM]	MIN	MAX		MIN	MAX			TOOL NO.
1	25,4	12	0,109	2,77	0,782	19,86	0,763	0,852	19,38	21,64	845-5	R-11-5	846-5	R-11-A-5	M-18-3/8	3/8	9,5	K50-600	TES3000 G1450 or TESMini2 ES2
		13	0,095	2,41	0,810	20,57	0,791	0,880	20,09	22,35	847-5	R-13-5	848-5	R-13-A-5	M-18-3/8	3/8	9,5		
		14	0,083	2,11	0,834	21,18	0,810	0,909	20,57	23,09	849-5	R-12-5	850-5	R-12-A-5	M-850-5	3/8	9,5		
		15	0,072	1,83	0,856	21,74	0,837	0,936	21,26	23,77	851-5	R-14-5	852-5	R-14-A-5	M-852-5	3/8	9,5		
		16	0,065	1,65	0,87	22,10	0,837	0,936	21,26	23,77	851-5	R-13-5	852-5	R-13-A-5	M-852-5	3/8	9,5		
		17	0,058	1,47	0,884	22,45	0,865	0,964	21,97	24,49	855-5	R-13-5	856-5	R-13-A-5	M-856-5	3/8	9,5	K50-1250	TES3000 G1000 or TESMini2 DU0
	18	0,049	1,24	0,902	22,91	0,865	0,964	21,97	24,49	855-5	R-13-5	856-5	R-13-A-5	M-856-5	3/8	9,5			
	19	0,042	1,07	0,916	23,27	0,865	0,964	21,97	24,49	855-5	R-13-5	856-5	R-13-A-5	M-856-5	3/8	9,5			
	20	0,035	0,89	0,93	23,62	0,865	0,964	21,97	24,49	855-5	R-13-5	856-5	R-13-A-5	M-856-5	3/8	9,5			
	21	0,032	0,81	0,936	23,77	0,883	0,982	22,43	24,94	857-5	R-15-5	858-5	R-15-A-5	M-21-3/8	3/8	9,5			
	22	0,028	0,71	0,944	23,98	0,883	0,982	22,43	24,94	857-5	R-15-5	858-5	R-15-A-5	M-21-3/8	3/8	9,5			
	1-1/8	28,5	12	0,109	2,77	0,907	23,04	0,883	0,982	22,43	24,94	857-5	R-15-5	858-5	R-15-A-5	M-21-3/8	3/8	9,5	K60-400
13			0,095	2,41	0,935	23,75	0,916	1,015	23,27	25,78	859-5	R-16-5	860-5	R-16-A-5	M-860-5	1/2	12,7		
14			0,083	2,11	0,959	24,36	0,935	1,044	23,75	26,52	861-5	R-17-5	862-5	R-17-A-5	M-862-5	1/2	12,7		
1-1/4	31,7	15	0,072	1,83	1,106	28,09	1,087	1,196	27,61	30,38	875-5	R-21-5	876-5	R-21-A-5	M-876-5	1/2	12,7	K60-400	TES3000 G1000 or TESMini2 DU1
		16	0,065	1,65	1,120	28,45	1,087	1,196	27,61	30,38	875-5	R-21-5	876-5	R-21-A-5	M-876-5	1/2	12,7		
		17	0,058	1,47	1,134	28,80	1,115	1,231	28,32	31,27	879-5	R-21-5	880-5	R-21-A-5	M-880-5	1/2	12,7		
		18	0,049	1,24	1,152	29,26	1,115	1,231	28,32	31,27	879-5	R-21-5	880-5	R-21-A-5	M-880-5	1/2	12,7		
		19	0,042	1,07	1,166	29,62	1,115	1,231	28,32	31,27	879-5	R-21-5	880-5	R-21-A-5	M-880-5	1/2	12,7		
		20	0,035	0,89	1,180	29,97	1,115	1,231	28,32	31,27	879-5	R-21-5	880-5	R-21-A-5	M-880-5	1/2	12,7		
		21	0,032	0,81	1,186	30,12	1,115	1,231	28,32	31,27	879-5	R-21-5	880-5	R-21-A-5	M-880-5	1/2	12,7		
		22	0,028	0,71	1,194	30,33	1,115	1,231	28,32	31,27	879-5	R-21-5	880-5	R-21-A-5	M-880-5	1/2	12,7		
1-3/8	34,9	12	0,109	2,77	1,157	29,39	1,133	1,242	28,78	31,55	881-5	R-21-5	882-5	R-21-A-5	M-882-5	1/2	12,7	K60-250	
		14	0,083	2,11	1,209	30,71	1,179	1,294	29,95	32,87	885-5	R-23-5	886-5	R-23-A-5	M-882-5	1/2	12,7		
1-1/2	38,1	17	0,058	1,47	1,384	35,15	1,331	1,472	33,81	37,39	899-5	R-29-5	900-5	R-29-A-5	M-900-5	1/2	12,7	K60-900	TES3000 G1000 or TESMini2 ES2
		18	0,049	1,24	1,402	35,61	1,331	1,472	33,81	37,39	899-5	R-29-5	900-5	R-29-A-5	M-900-5	1/2	12,7		
		19	0,042	1,07	1,416	35,97	1,331	1,472	33,81	37,39	899-5	R-29-5	900-5	R-29-A-5	M-900-5	1/2	12,7		
		20	0,035	0,89	1,430	36,32	1,331	1,472	33,81	37,39	899-5	R-29-5	900-5	R-29-A-5	M-900-5	1/2	12,7		
		21	0,032	0,81	1,436	36,47	1,331	1,472	33,81	37,39	899-5	R-29-5	900-5	R-29-A-5	M-900-5	1/2	12,7		
		22	0,028	0,71	1,444	36,68	1,331	1,472	33,81	37,39	899-5	R-29-5	900-5	R-29-A-5	M-900-5	1/2	12,7		

* Motor recommendation applies only to most popular cases with a standard percentage of the wall reduction. The recommendation can be different for thicker tube sheet, harder and exotic metal tube and a higher percentage of wall reduction.

1200 SERIES CONDENSER TUBE EXPANDERS




BASIC INFO

Tools for expanding tubes in condensers, chillers, heat exchangers, fin fan coolers, feedwater heaters and surface condensers. As a standard expanders are supplied with STC collar. Available in regular and long reaches (some diameters, up to 5m) and as the 5-rolls version for rolling thin walls. Many different shaped rolls are available.

WORKING RANGE


TUBE ID	TUBE OD	TUBE SHEET
8,48 - 36,32 MM	12,7 - 38,1 MM	See table below
0,334 - 1,430"	1/2" to 1-1/2"	

OPTIONAL SPARES AND ACCESSORIES



ROLLS ON REQUEST

→ PAGE 9



THRUST COLLARS

→ PAGE 9



ROLLING MOTORS

→ CHAPTER PAGE 38

TUBE SHEET THICKNESS

ROLLS	REACH	TUBE SHEET THICKNESS	
		[INCH]	[MM]
1 1/2" 38,1	STD	1 1/2 - 6"	38,1 - 152,4 mm
	A	1 1/2 - 8"	38,1 - 203,2 mm
	B	1 1/2 - 10"	38,1 - 254,0 mm
	C	1 1/2 - 12"	38,1 - 304,8 mm
2 1/4" 57,1	STD	2 1/4 - 6 3/4"	57,1 - 171,4 mm
	A	2 1/4 - 8 3/4"	57,1 - 222,2 mm
	B	2 1/4 - 10 3/4"	57,1 - 273,0 mm
	C	2 1/4 - 12 3/4"	57,1 - 323,8 mm

NOTE!

Please note that expanders are equipped with "UNIVERSAL NOSE PIECE" which shorten the expansion reach by 3/4". In order to receive full expansion reach, expander has to be equipped with "SHORT NOSE PIECE".

TUBE OD		TUBE GAUGE		TUBE ID		EXPANSION RANGE				TUBE SHEET THICKNESS				MANDREL	MANDREL SQUARE		PNEUMATIC MOTOR *	ELECTRIC MOTOR *	
										1/2" TO 6"		2-1/4" TO 6-3/4"							
						[INCH]	[MM]	[BWG]	[INCH]	[MM]	[INCH]	[MM]	MIN		MAX	MIN			MAX
1/2	12,7	14	0,083	2,11	0,334	8,48	0,324	0,374	8,23	9,50	1197	797	-	-	1197	3/8	9,5	K20-500	TES3000 S1500 or TESMini2 HTO
		15	0,072	1,83	0,356	9,04	0,348	0,398	8,84	10,11	1199	R-1	-	-	1199	3/8	9,5		
		16	0,065	1,65	0,370	9,40	0,36	0,41	9,14	10,41	1201	R-1	-	-	M-51	3/8	9,5		
		17	0,058	1,47	0,384	9,75	0,374	0,424	9,50	10,77	1203	R-2	-	-	M-51	3/8	9,5	K20-1800	
		18	0,049	1,24	0,402	10,21	0,392	0,447	9,96	11,35	1205	R-3	-	-	M-52	3/8	9,5		
		20	0,035	0,89	0,430	10,92	0,406	0,461	10,31	11,71	1205[S]	R-3	-	-	M-53	3/8	9,5		
5/8	15,8	12	0,109	2,77	0,407	10,34	0,392	0,447	9,96	11,35	1205	R-3	-	-	M-52	3/8	9,5	K50-600	TES3000 G1450 or TesMini2 ES2
		13	0,095	2,41	0,435	11,05	0,425	0,480	10,80	12,19	1207	R-4	-	-	M-53	3/8	9,5		
		14	0,083	2,11	0,459	11,66	0,449	0,509	11,40	12,93	1209	R-4	1210	R-4-A	M-54	3/8	9,5		
		15	0,072	1,83	0,481	12,22	0,471	0,536	11,96	13,61	1211	R-5	1212	R-5-A	M-55	3/8	9,5		
		16	0,065	1,65	0,495	12,57	0,485	0,550	12,32	13,97	1213	R-6	1214	R-6A	M-55	3/8	9,5	K50-1250	TES3000 G1000 or TESMini2 DUO
		17	0,058	1,47	0,509	12,93	0,499	0,564	12,67	14,33	1215	R-6	1216	R-6A	M-56	3/8	9,5		
		18	0,049	1,24	0,527	13,39	0,517	0,572	13,13	14,53	1217	R-7	1218	R-7-A	M-57	3/8	9,5		
		19	0,042	1,07	0,541	13,74	0,522	0,582	13,26	14,78	1219	R-7	1220	R-7-A	M-56	3/8	9,5		
		20	0,035	0,89	0,555	14,10	0,536	0,596	13,61	15,14	1219[S]	R-7	1220[S]	R-7-A	M-58	3/8	9,5		
		21	0,032	0,81	0,561	14,25	0,536	0,596	13,61	15,14	1219[S]	R-7	1220[S]	R-7-A	M-58	3/8	9,5		
		22	0,028	0,71	0,569	14,45	0,536	0,596	13,61	15,14	1219[S]	R-7	1220[S]	R-7-A	M-58	3/8	9,5		

TUBE OD		TUBE GAUGE			TUBE ID		EXPANSION RANGE				TUBE SHEET THICKNESS				MANDREL	MANDREL SQUARE		PNEUMATIC MOTOR *	ELECTRIC MOTOR *
											1/2" TO 6"		2-1/4" TO 6-3/4"						
							[INCH]	[MM]	[BWG]	[INCH]	[MM]	[INCH]	[MM]	MIN		MAX	MIN		
3/4	19	10	0,134	3,40	0,482	12,24	0,471	0,536	11,96	13,61	1211	R-5	1212	R-5-A	M-55	3/8	9,5	K60-900	TES3000 + G1000 TESMini2 + ES2
		11	0,120	3,05	0,510	12,95	0,499	0,564	12,67	14,33	1215	R-6	1216	R-6-A	M-56	3/8	9,5		
		12	0,109	2,77	0,532	13,51	0,522	0,582	13,26	14,78	1219	R-7	1220	R-7-A	M-56	3/8	9,5		
		13	0,095	2,41	0,560	14,22	0,55	0,615	13,97	15,62	1221	R-8	1222	R-8-A	M-58	3/8	9,5	K50-400	TES3000 G1450 or TESMini2 ES2
		14	0,083	2,11	0,584	14,83	0,574	0,639	14,58	16,23	1223	R-9	1224	R-9-A	M-58	3/8	9,5		
		15	0,072	1,83	0,606	15,39	0,596	0,661	15,14	16,79	1225	R-10	1226	R-10-A	M-58	3/8	9,5	K50-600	
		16	0,065	1,65	0,620	15,75	0,605	0,685	15,37	17,40	1227	R-10	1228	R-10-A	M-59	3/8	9,5		
		17	0,058	1,47	0,634	16,10	0,619	0,699	15,72	17,75	1229	R-11	1230	R-11-A	M-59	3/8	9,5	K60-900	TES3000 G1000 or TESMini2 DUO
		18	0,049	1,24	0,652	16,56	0,619	0,699	15,72	17,75	1229	R-11	1230	R-11-A	M-59	3/8	9,5		
		19	0,042	1,07	0,666	16,92	0,642	0,722	16,31	18,34	1231	R-12	1232	R-12-A	M-59	3/8	9,5		
		20	0,035	0,89	0,680	17,27	0,642	0,722	16,31	18,34	1231	R-12	1232	R-12-A	M-59	3/8	9,5		
		21	0,032	0,81	0,686	17,42	0,642	0,722	16,31	18,34	1231	R-12	1232	R-12-A	M-59	3/8	9,5		
		22	0,028	0,71	0,694	17,63	0,642	0,722	16,31	18,34	1231	R-12	1232	R-12-A	M-59	3/8	9,5		
7/8	22,2	10	0,134	3,40	0,607	15,42	0,596	0,661	15,14	16,79	1225	R-10	1226	R-10-A	M-58	3/8	9,5	K50-400	TES3000 G1000 or TESMini2 ES2
		11	0,120	3,05	0,635	16,13	0,619	0,699	15,72	17,75	1229	R-11	1230	R-11-A	M-59	3/8	9,5		
		12	0,109	2,77	0,657	16,69	0,642	0,722	16,31	18,34	1231	R-12	1232	R-12-A	M-59	3/8	9,5		
		13	0,095	2,41	0,685	17,40	0,67	0,750	17,02	19,05	1233	R-13	1234	R-13-A	M-60	3/8	9,5	K50-600	
		14	0,083	2,11	0,709	18,01	0,685	0,774	17,40	19,66	1235	R-14	1236	R-14-A	M-61	3/8	9,5		
		15	0,072	1,83	0,731	18,57	0,712	0,801	18,08	20,35	1237	R-15	1238	R-15-A	M-61	3/8	9,5		
		16	0,065	1,65	0,745	18,92	0,726	0,815	18,44	20,70	1239	R-15	1240	R-15-A	M-62	3/8	9,5	K50-1250	TES3000 + G1450 TESMini2 ES2
		17	0,058	1,47	0,759	19,28	0,740	0,829	18,80	21,06	1243	R-16	1244	R-16-A	M-62	3/8	9,5		
1	25,4	18	0,049	1,24	0,777	19,74	0,740	0,829	18,80	21,06	1243	R-16	1244	R-16-A	M-62	3/8	9,5	K60-400	TES3000 G1000 or TESMini2 ES2
		8	0,165	4,19	0,670	17,02	0,655	0,735	16,64	18,67	1241	R-13	1242	R-13-A	M-59	3/8	9,5		
		9	0,148	3,76	0,704	17,88	0,685	0,774	17,40	19,66	1235	R-14	1236	R-14-A	M-61	3/8	9,5		
		10	0,134	3,40	0,732	18,59	0,712	0,801	18,08	20,35	1237	R-15	1238	R-15-A	M-61	3/8	9,5		
		11	0,120	3,05	0,760	19,30	0,740	0,829	18,80	21,06	1243	R-16	1244	R-16-A	M-62	3/8	9,5		
		12	0,109	2,77	0,782	19,86	0,763	0,852	19,38	21,64	1245	R-17	1246	R-17-A	M-62	3/8	9,5		
		13	0,095	2,41	0,810	20,57	0,791	0,880	20,09	22,35	1247	R-18	1248	R-18-A	M-62	3/8	9,5	K50-400	
		14	0,083	2,11	0,834	21,18	0,810	0,909	20,57	23,09	1249	R-18	1250	R-18-A	M-63	3/8	9,5		
		15	0,072	1,83	0,856	21,74	0,837	0,936	21,26	23,77	1251	R-19	1252	R-19-A	M-63	3/8	9,5		
		16	0,065	1,65	0,870	22,10	0,837	0,936	21,26	23,77	1251	R-19	1252	R-19-A	M-63	3/8	9,5	K50-600	
		17	0,058	1,47	0,884	22,45	0,865	0,964	21,97	24,49	1255	R-21	1256	R-21-A	M-63	3/8	9,5		
		18	0,049	1,24	0,902	22,91	0,865	0,964	21,97	24,49	1255	R-21	1256	R-21-A	M-63	3/8	9,5		
1-1/8	28,5	19	0,042	1,07	0,916	23,27	0,865	0,964	21,97	24,49	1255	R-21	1256	R-21-A	M-63	3/8	9,5	K60-400	TES3000 G1000 or TESMini2 DU1
		20	0,035	0,89	0,930	23,62	0,865	0,964	21,97	24,49	1255	R-21	1256	R-21-A	M-63	3/8	9,5		
		8	0,165	4,19	0,795	20,19	0,776	0,875	19,71	22,23	1253	R-20	1254	R-20-A	M-63	3/8	9,5		
		9	0,148	3,76	0,829	21,06	0,810	0,909	20,57	23,09	1249	R-18	1250	R-18-A	M-63	3/8	9,5		
		10	0,134	3,40	0,857	21,77	0,837	0,936	21,26	23,77	1251	R-19	1252	R-19-A	M-63	3/8	9,5		
		11	0,120	3,05	0,885	22,48	0,865	0,964	21,97	24,49	1255	R-21	1256	R-21-A	M-63	3/8	9,5		
		12	0,109	2,77	0,907	23,04	0,883	0,982	22,43	24,94	1257	R-21	1258	R-21-A	M-64	1/2	12,7	K60-400	
		13	0,095	2,41	0,935	23,75	0,916	1,015	23,27	25,78	1259	R-22	1260	R-22-A	M-64	1/2	12,7		
		14	0,083	2,11	0,959	24,36	0,935	1,044	23,75	26,52	1261	R-23	1262	R-23-A	M-65	1/2	12,7		
		15	0,072	1,83	0,981	24,92	0,962	1,071	24,43	27,20	1263	R-24	1264	R-24-A	M-65	1/2	12,7		
		16	0,065	1,65	0,995	25,27	0,962	1,071	24,43	27,20	1263	R-24	1264	R-24-A	M-65	1/2	12,7		
		17	0,058	1,47	1,009	25,63	0,990	1,099	25,15	27,91	1267	R-26	1268	R-26-A	M-66	1/2	12,7		
		18	0,049	1,24	1,027	26,09	0,990	1,099	25,15	27,91	1267	R-26	1268	R-26-A	M-66	1/2	12,7		

TUBE OD		TUBE GAUGE			TUBE ID		EXPANSION RANGE				TUBE SHEET THICKNESS				MANDREL	MANDREL SQUARE		PNEUMATIC MOTOR *	ELECTRIC MOTOR *
											1/2" TO 6"		2-1/4" TO 6-3/4"						
							[INCH]	[MM]	[BWG]	[INCH]	[MM]	[INCH]	[MM]	MIN		MAX	MIN		
1-1/4	31,7	8	0,165	4,19	0,92	23,37	0,901	1,010	22,89	25,65	1265	R-25	1266	R-25-A	M-65	1/2	12,7	K60-400	TES3000 G1000 or TESMini2 DU1
		9	0,148	3,76	0,954	24,23	0,935	1,044	23,75	26,52	1261	R-23	1262	R-23-A	M-65	1/2	12,7		
		10	0,134	3,40	0,982	24,94	0,962	1,071	24,43	27,20	1263	R-24	1264	R-24-A	M-65	1/2	12,7		
		11	0,120	3,05	1,010	25,65	0,990	1,099	25,15	27,91	1267	R-26	1268	R-26-A	M-66	1/2	12,7		
		12	0,109	2,77	1,032	26,21	1,013	1,122	25,73	28,50	1269	R-27	1270	R-27-A	M-66	1/2	12,7		
		13	0,095	2,41	1,060	26,92	1,041	1,150	26,44	29,21	1271	R-28	1272	R-28-A	M-67	1/2	12,7		
		14	0,083	2,11	1,084	27,53	1,060	1,169	26,92	29,69	1273	R-29	1274	R-29-A	M-67	1/2	12,7		
		15	0,072	1,83	1,106	28,09	1,087	1,196	27,61	30,38	1275	R-30	1276	R-30-A	M-67	1/2	12,7		
		16	0,065	1,65	1,12	28,45	1,087	1,196	27,61	30,38	1275	R-30	1276	R-30-A	M-67	1/2	12,7		
		17	0,058	1,47	1,134	28,80	1,115	1,224	28,32	31,09	1279	R-30	1280	R-30-A	M-68	1/2	12,7		
		18	0,049	1,24	1,152	29,26	1,115	1,224	28,32	31,09	1279	R-30	1280	R-30-A	M-68	1/2	12,7		
1-3/8	34,9	8	0,165	4,19	1,045	26,54	1,026	1,135	26,06	28,83	1277	R-31	1278	R-31-A	M-67	1/2	12,7	K60-250	TES3000 G400 or TESMini2 DU1
		9	0,148	3,76	1,079	27,41	1,060	1,169	26,92	29,69	1273	R-29	1274	R-29-A	M-67	1/2	12,7		
		10	0,134	3,40	1,107	28,12	1,087	1,196	27,61	30,38	1275	R-30	1276	R-30-A	M-67	1/2	12,7		
		11	0,120	3,05	1,135	28,83	1,115	1,224	28,32	31,09	1279	R-30	1280	R-30-A	M-68	1/2	12,7		
		12	0,109	2,77	1,157	29,39	1,133	1,242	28,78	31,55	1281	R-32	1282	R-32-A	M-68	1/2	12,7		
		13	0,095	2,41	1,185	30,10	1,160	1,275	29,46	32,39	1283	R-33	1284	R-33-A	M-69	1/2	12,7		
		14	0,083	2,11	1,209	30,71	1,179	1,294	29,95	32,87	1285	R-34	1286	R-34-A	M-70	1/2	12,7		
		15	0,072	1,83	1,231	31,27	1,206	1,321	30,63	33,55	1287	R-35	1288	R-35-A	M-70	1/2	12,7		
		16	0,065	1,65	1,245	31,62	1,206	1,321	30,63	33,55	1287	R-35	1288	R-35-A	M-70	1/2	12,7		
1-1/2	38,1	8	0,165	4,19	1,170	29,72	1,145	1,260	29,08	32,00	1289	R-34	1290	R-34-A	M-69	1/2	12,7	K60-250	TES3000 G400 or TESMini2 DU1
		9	0,148	3,76	1,204	30,58	1,145	1,294	29,08	32,87	1285	R-34	1286	R-34-A	M-70	1/2	12,7		
		10	0,134	3,40	1,232	31,29	1,206	1,321	30,63	33,55	1287	R-35	1288	R-35-A	M-70	1/2	12,7		
		11	0,120	3,05	1,260	32,00	1,235	1,350	31,37	34,29	1291	R-36	1292	R-36-A	M-70	1/2	12,7		
		12	0,109	2,77	1,282	32,56	1,257	1,372	31,93	34,85	1293	R-37	1294	R-37-A	M-70	1/2	12,7		
		13	0,095	2,41	1,310	33,27	1,285	1,400	32,64	35,56	1295	R-37	1296	R-37-A	M-71	1/2	12,7		
		14	0,083	2,11	1,334	33,88	1,285	1,400	32,64	35,56	1295	R-37	1296	R-37-A	M-71	1/2	12,7		
		15	0,072	1,83	1,356	34,44	1,331	1,446	33,81	36,73	1297	R-38	1298	R-38-A	M-71	1/2	12,7		
		16	0,065	1,65	1,370	34,80	1,331	1,446	33,81	36,73	1297	R-38	1298	R-38-A	M-71	1/2	12,7		
		17	0,058	1,47	1,384	35,15	1,331	1,472	33,81	37,39	1299	R-38	1300	R-38-A	M-72	1/2	12,7		
		18	0,049	1,24	1,402	35,61	1,331	1,472	33,81	37,39	1299	R-38	1300	R-38-A	M-72	1/2	12,7		
		19	0,042	1,07	1,416	35,97	1,331	1,472	33,81	37,39	1299	R-38	1300	R-38-A	M-72	1/2	12,7		
		20	0,035	0,89	1,430	36,32	1,331	1,472	33,81	37,39	1299	R-38	1300	R-38-A	M-72	1/2	12,7		

* Motor recommendation applies only to most popular cases with a standard percentage of the wall reduction. The recommendation can be different for thicker tube sheet, harder and exotic metal tube and a higher percentage of wall reduction.

1200L SERIES CONDENSER TUBE EXPANDERS



BASIC INFO


Tools for expanding tubes in condensers, chillers, heat exchangers, fin fan coolers, feedwater heaters and surface condensers. Version with longer rolls for thicker tube sheets.

As a standard expanders are supplied with STC collar. Many different shaped rolls are available.

WORKING RANGE


TUBE ID	TUBE OD	TUBE SHEET
14,23 - 36,32 MM	19,05 - 38,1 MM	76 - 171,4 mm
0,560 - 1,429"	3/4" to 1-1/2"	3" - 6-3/4"

OPTIONAL SPARES AND ACCESSORIES



ROLLS ON REQUEST

→ PAGE 9



THRUST COLLARS

→ PAGE 9



ROLLING MOTORS

→ CHAPTER PAGE 38

TUBE SHEET THICKNESS

ROLLS	REACH	TUBE SHEET THICKNESS	
		[INCH]	[MM]
1 1/2" 38,1	STD	1 1/2 - 6"	38,1 - 152,4 mm
	A	1 1/2 - 8"	38,1 - 203,2 mm
	B	1 1/2 - 10"	38,1 - 254,0 mm
	C	1 1/2 - 12"	38,1 - 304,8 mm
2 1/4" 57,1	STD	2 1/4 - 6 3/4"	57,1 - 171,4 mm
	A	2 1/4 - 8 3/4"	57,1 - 222,2 mm
	B	2 1/4 - 10 3/4"	57,1 - 273,0 mm
	C	2 1/4 - 12 3/4"	57,1 - 323,8 mm

NOTE!

Please note that expanders are equipped with "UNIVERSAL NOSE PIECE" which shorten the expansion reach by 3/4". In order to receive full expansion reach, expander has to be equipped with "SHORT NOSE PIECE".

TUBE OD		TUBE GAUGE			EXPANSION RANGE				WALL THICKNESS		MANDREL		RECOMMENDED DRIVE		
					[INCH]		[MM]		3" TO 6-3/4" (76 TO 171,4 MM)				ELECTRIC (WITH DIGITAL CONTROLLER)		PNEUMATIC
[INCH]	[MM]	[BWG]	[INCH]	[MM]	MIN	MAX	MIN	MAX	TOOL NO.	ROLL NO.	NO.	SQUARE	TES3000	TESMINI2	
3/4	19,05	13	0,10	2,41	0,55	0,61	13,97	15,40	1222-L	R-8-L	M-58	3/8	G1450	ES2	K50-400
3/4	19,05	14	0,08	2,11	0,57	0,63	14,58	16,00	1224-L	R-9-L	M-58	3/8	G1450	ES2	K50-400
3/4	19,05	15	0,07	1,83	0,59	0,65	15,10	16,50	1226-L	R-10-L	M-58	3/8	G1450	ES2	K50-600
3/4	19,05	16	0,07	1,65	0,61	0,67	15,40	17,10	1228-L	R-10-L	M-59	3/8	G1450	ES2	K50-600
3/4	19,05	17	0,06	1,47	0,62	0,69	15,75	17,40	1230-L	R-11-L	M-59	3/8	G1000	DU0	K60-900
3/4	19,05	18	0,05	1,25	0,62	0,69	15,75	17,40	1230-L	R-11-L	M-59	3/8	G1000	DU0	K60-900
3/4	19,05	19	0,04	1,07	0,64	0,71	16,35	18,00	1232-L	R-12-L	M-59	3/8	G1000	DU0	K60-900
3/4	19,05	20	0,04	0,89	0,64	0,71	16,35	18,00	1232-L	R-12-L	M-59	3/8	G1000	DU0	K60-900
3/4	19,05	21	0,03	0,81	0,67	0,74	17,00	18,80	1234-L	R-13-L	M-60	3/8	G1000	DU0	K60-900
3/4	19,05	22	0,03	0,71	0,67	0,74	17,00	18,80	1234-L	R-13-L	M-60	3/8	G1000	DU0	K60-900
7/8	22,23	10	0,13	3,40	0,59	0,65	15,10	16,50	1226-L	R-10-L	M-58	3/8	G1000	ES2	K50-400
7/8	22,23	11	0,12	3,05	0,62	0,69	15,75	17,40	1230-L	R-11-L	M-59	3/8	G1000	ES2	K50-400
7/8	22,23	12	0,11	2,77	0,64	0,71	16,35	18,00	1232-L	R-12-L	M-59	3/8	G1000	ES2	K50-400
7/8	22,23	13	0,10	2,41	0,67	0,74	16,90	18,70	1234-L	R-13-L	M-60	3/8	G1000	ES2	K50-600
7/8	22,23	14	0,08	2,11	0,69	0,76	17,45	19,40	1236-L	R-14-L	M-61	3/8	G1000	ES2	K50-600
7/8	22,23	15	0,07	1,83	0,71	0,79	18,10	20,10	1238-L	R-15-L	M-61	3/8	G1000	ES2	K50-600
7/8	22,23	16	0,07	1,65	0,73	0,81	18,50	20,50	1240-L	R-15-L	M-62	3/8	G1000	ES2	K50-600
7/8	22,23	17	0,06	1,47	0,74	0,82	18,80	20,75	1244-L	R-16-L	M-62	3/8	G1450	ES2	K50-1250
7/8	22,23	18	0,05	1,25	0,74	0,82	18,80	20,75	1244-L	R-16-L	M-62	3/8	G1450	ES2	K50-1250

TUBE OD		TUBE GAUGE			EXPANSION RANGE				WALL THICKNESS		MANDREL		RECOMMENDED DRIVE		
					[INCH]		[MM]		3" TO 6-3/4" (76 TO 171,4 MM)				ELECTRIC (WITH DIGITAL CONTROLLER)		PNEUMATIC
[INCH]	[MM]	[BWG]	[INCH]	[MM]	MIN	MAX	MIN	MAX	TOOL NO.	ROLL NO.	NO.	SQUARE	TES3000	TESMINI2	
1	25,40	8	0,17	4,19	0,66	0,72	16,65	18,30	1242-L	R-13-L	M-59	3/8	G1000	ES2	K60-400
1	25,40	9	0,15	3,76	0,69	0,76	17,45	19,40	1236-L	R-14-L	M-61	3/8	G1000	ES2	K60-400
1	25,40	10	0,13	3,40	0,71	0,79	18,10	20,10	1238-L	R-15-L	M-61	3/8	G1000	ES2	K60-400
1	25,40	11	0,12	3,05	0,74	0,82	18,80	20,75	1244-L	R-16-L	M-62	3/8	G1000	ES2	K60-400
1	25,40	12	0,11	2,77	0,77	0,84	19,45	21,40	1246-L	R-17-L	M-62	3/8	G1000	ES2	K60-400
1	25,40	13	0,10	2,41	0,79	0,87	20,05	22,10	1248-L	R-18-L	M-62	3/8	G1000	ES2	K50-400
1	25,40	14	0,08	2,11	0,81	0,90	20,50	22,80	1250-L	R-18-L	M-63	3/8	G1000	ES2	K50-400
1	25,40	15	0,07	1,83	0,84	0,94	21,25	23,80	1252-L	R-19-L	M-63	3/8	G1000	ES2	K50-400
1	25,40	16	0,07	1,65	0,84	0,94	21,25	23,80	1252-L	R-19-L	M-63	3/8	G1000	ES2	K50-400
1	25,40	17	0,06	1,47	0,86	0,96	21,95	24,50	1256-L	R-21-L	M-63	3/8	G1000	ES2	K50-600
1	25,40	18	0,05	1,25	0,86	0,96	21,95	24,50	1256-L	R-21-L	M-63	3/8	G1000	ES2	K50-600
1	25,40	19	0,04	1,07	0,86	0,96	21,95	24,50	1256-L	R-21-L	M-63	3/8	G1000	ES2	K50-600
1	25,40	20	0,04	0,89	0,86	0,96	21,95	24,50	1256-L	R-21-L	M-63	3/8	G1000	ES2	K50-600
1 1/8	28,58	8	0,17	4,19	0,78	0,87	19,70	22,20	1254-L	R-20-L	M-63	3/8	G1000	DU1	K60-400
1 1/8	28,58	9	0,15	3,76	0,81	0,90	20,50	22,80	1250-L	R-18-L	M-63	3/8	G1000	DU1	K60-400
1 1/8	28,58	10	0,13	3,40	0,84	0,94	21,25	23,80	1252-L	R-19-L	M-63	3/8	G1000	DU1	K60-400
1 1/8	28,58	11	0,12	3,05	0,86	0,96	21,95	24,50	1256-L	R-21-L	M-63	3/8	G1000	DU1	K60-400
1 1/8	28,58	12	0,11	2,77	0,88	0,98	22,40	24,90	1258-L	R-21-L	M-64	1/2	G1000	DU1	K60-400
1 1/8	28,58	13	0,10	2,41	0,91	1,02	23,20	25,80	1260-L	R-22-L	M-64	1/2	G1000	DU1	K60-400
1 1/8	28,58	14	0,08	2,11	0,93	1,04	23,70	26,50	1262-L	R-23-L	M-65	1/2	G1000	DU1	K60-400
1 1/8	28,58	15	0,07	1,83	0,96	1,07	24,40	27,20	1264-L	R-24-L	M-65	1/2	G1000	DU1	K60-400
1 1/8	28,58	16	0,07	1,65	0,96	1,07	24,40	27,20	1264-L	R-24-L	M-65	1/2	G1000	DU1	K60-400
1 1/8	28,58	17	0,06	1,47	0,99	1,10	25,10	27,90	1268-L	R-26-L	M-66	1/2	G1000	DU1	K60-400
1 1/8	28,58	18	0,05	1,25	0,99	1,10	25,10	27,90	1268-L	R-26-L	M-66	1/2	G1000	DU1	K60-400
1 1/4	31,75	8	0,17	4,19	0,90	1,01	22,85	25,60	1266-L	R-25-L	M-65	1/2	G1000	DU1	K60-400
1 1/4	31,75	9	0,15	3,76	0,93	1,04	23,70	26,50	1262-L	R-23-L	M-65	1/2	G1000	DU1	K60-400
1 1/4	31,75	10	0,13	3,40	0,96	1,07	24,40	27,20	1264-L	R-24-L	M-65	1/2	G1000	DU1	K60-400
1 1/4	31,75	11	0,12	3,05	0,99	1,10	25,10	27,90	1268-L	R-26-L	M-66	1/2	G1000	DU1	K60-400
1 1/4	31,75	12	0,11	2,77	1,01	1,12	25,70	28,50	1270-L	R-27-L	M-66	1/2	G1000	DU1	K60-400
1 1/4	31,75	13	0,10	2,41	1,04	1,15	26,40	29,20	1272-L	R-28-L	M-67	1/2	G1000	DU1	K60-400
1 1/4	31,75	14	0,08	2,11	1,06	1,17	26,90	29,70	1274-L	R-29-L	M-67	1/2	G1000	DU1	K60-400
1 1/4	31,75	15	0,07	1,83	1,09	1,20	27,60	30,40	1276-L	R-30-L	M-67	1/2	G1000	DU1	K60-400
1 1/4	31,75	16	0,07	1,65	1,09	1,20	27,60	30,40	1276-L	R-30-L	M-67	1/2	G1000	DU1	K60-400
1 1/4	31,75	17	0,06	1,47	1,11	1,22	28,30	31,00	1280-L	R-30-L	M-68	1/2	G1000	DU1	K60-400
1 1/4	31,75	18	0,05	1,25	1,11	1,22	28,30	31,00	1280-L	R-30-L	M-68	1/2	G1000	DU1	K60-400
1 3/8	34,93	8	0,17	4,19	1,03	1,14	26,05	28,85	1278-L	R-31-L	M-67	1/2	G400	DU1	K60-250
1 3/8	34,93	9	0,15	3,76	1,06	1,17	26,90	29,70	1274-L	R-29-L	M-67	1/2	G400	DU1	K60-250
1 3/8	34,93	10	0,13	3,40	1,09	1,20	27,60	30,40	1276-L	R-30-L	M-67	1/2	G400	DU1	K60-250
1 3/8	34,93	11	0,12	3,05	1,11	1,22	28,30	31,00	1280-L	R-30-L	M-68	1/2	G400	DU1	K60-250
1 3/8	34,93	12	0,11	2,77	1,13	1,24	28,80	31,55	1282-L	R-32-L	M-68	1/2	G400	DU1	K60-250
1 3/8	34,93	13	0,10	2,41	1,16	1,28	29,45	32,40	1284-L	R-33-L	M-69	1/2	G400	DU1	K60-400
1 3/8	34,93	14	0,08	2,11	1,18	1,30	29,95	32,90	1286-L	R-34-L	M-70	1/2	G400	DU1	K60-400
1 3/8	34,93	15	0,07	1,83	1,20	1,32	30,60	33,55	1288-L	R-35-L	M-70	1/2	G400	DU1	K60-400
1 3/8	34,93	16	0,07	1,65	1,20	1,32	30,60	33,55	1288-L	R-35-L	M-70	1/2	G400	DU1	K60-400
1 1/2	38,10	8	0,17	4,19	1,15	1,26	29,10	32,00	1290-L	R-34-L	M-69	1/2	G400	DU1	K60-250

TUBE OD		TUBE GAUGE			EXPANSION RANGE				WALL THICKNESS		MANDREL		RECOMMENDED DRIVE		
					[INCH]		[MM]		3" TO 6-3/4" (76 TO 171,4 MM)				ELECTRIC (WITH DIGITAL CONTROLLER)		PNEUMATIC
[INCH]	[MM]	[BWG]	[INCH]	[MM]	MIN	MAX	MIN	MAX	TOOL NO.	ROLL NO.	NO.	SQUARE	TES3000	TESMINI2	
1 1/2	38,10	9	0,15	3,76	1,18	1,30	29,95	32,90	1286-L	R-34-L	M-70	1/2	G400	DU1	K60-250
1 1/2	38,10	10	0,13	3,40	1,20	1,32	30,60	33,55	1288-L	R-35-L	M-70	1/2	G400	DU1	K60-250
1 1/2	38,10	11	0,12	3,05	1,23	1,35	31,35	34,30	1292-L	R-36-L	M-70	1/2	G400	DU1	K60-250
1 1/2	38,10	12	0,11	2,77	1,26	1,37	31,90	34,90	1294-L	R-37-L	M-70	1/2	G400	DU1	K60-250
1 1/2	38,10	13	0,10	2,41	1,29	1,40	32,65	35,60	1296-L	R-37-L	M-71	1/2	G400	DU1	K60-400
1 1/2	38,10	14	0,08	2,11	1,29	1,40	32,65	35,60	1296-L	R-37-L	M-71	1/2	G400	DU1	K60-400
1 1/2	38,10	15	0,07	1,83	1,33	1,45	33,80	36,75	1298-L	R-38-L	M-71	1/2	G400	DU1	K60-400
1 1/2	38,10	16	0,07	1,65	1,33	1,45	33,80	36,75	1298-L	R-38-L	M-71	1/2	G400	DU1	K60-400
1 1/2	38,10	17	0,06	1,47	1,33	1,47	33,80	37,40	1300-L	R-38-L	M-72	1/2	G400	DU1	K60-400
1 1/2	38,10	18	0,05	1,25	1,33	1,47	33,80	37,40	1300-L	R-38-L	M-72	1/2	G400	DU1	K60-400
1 1/2	38,10	19	0,04	1,07	1,33	1,47	33,80	37,40	1300-L	R-38-L	M-72	1/2	G400	DU1	K60-400
1 1/2	38,10	20	0,04	0,89	1,33	1,47	33,80	37,40	1300-L	R-38-L	M-72	1/2	G400	DU1	K60-400

1200-5 FIVE ROLL SERIES CONDENSER TUBE EXPANDERS



BASIC INFO

Tools for expanding tubes in condensers, chillers, heat exchangers, fin fan coolers, feedwater heaters and surface condensers.


As a standard expanders are supplied with STC collar but for 5-roll versions, especially for 19 to 22 GA tubes, TWTC thin wall thrust collar is recommended.

Expanders are available in regular and long reaches (some diameters, up to 5 m) and as the 3-rolls version. Many different shaped rolls are available.

WORKING RANGE


TUBE ID	TUBE OD	TUBE SHEET
14,83 - 36,32 MM	19,0 - 38,1 MM	See table below
0,584 - 1,430"	1/2" to 1-1/2"	

OPTIONAL SPARES AND ACCESSORIES



ROLLS ON REQUEST

→ PAGE 9



THRUST COLLARS

→ PAGE 9



ROLLING MOTORS

→ CHAPTER PAGE 38

TUBE SHEET THICKNESS

ROLLS	REACH	TUBE SHEET THICKNESS	
		[INCH]	[MM]
1-1/2" 38,1	STD	1 1/2 - 6"	38,1 - 152,4 mm
	A	1 1/2 - 8"	38,1 - 203,2 mm
	B	1 1/2 - 10"	38,1 - 254,0 mm
	C	1 1/2 - 12"	38,1 - 304,8 mm
2-1/4" 57,1	STD	2 1/4 - 6 3/4"	57,1 - 171,4 mm
	A	2 1/4 - 8 3/4"	57,1 - 222,2 mm
	B	2 1/4 - 10 3/4"	57,1 - 273,0 mm
	C	2 1/4 - 12 3/4"	57,1 - 323,8 mm

NOTE!

Please note that expanders are equipped with "UNIVERSAL NOSE PIECE" which shorten the expansion reach by 3/4". In order to receive full expansion reach, expander has to be equipped with "SHORT NOSE PIECE".

TUBE OD		TUBE GAUGE			TUBE ID		EXPANSION RANGE				TUBE SHEET THICKNESS				MANDREL	MANDREL SQUARE		PNEUMATIC MOTOR *	ELECTRIC MOTOR *
											1/2" TO 6"		2-1/4" TO 6-3/4"						
							[INCH]	[MM]	[BWG]	[INCH]	[MM]	[INCH]	[MM]	MIN					
5/8	15,8	17	0,058	1,47	0,509	12,93	0,499	0,564	12,67	14,33	1215-5	R-4-5	1216-5	R-4-A-5	M-1216-5	3/8	9,5	K50-1250	
		18	0,049	1,24	0,527	13,39	0,517	0,572	13,13	14,53	1217-5	R-4-5	1218-5	R-4-A-5	M-59	3/8	9,5		
		19	0,042	1,07	0,541	13,74	0,522	0,582	13,26	14,78	1219-5	R-4-5	1220-5	R-4-A-5	M-1220-5	3/8	9,5		
		20	0,035	0,89	0,555	14,10	0,536	0,596	13,61	15,14	1219-5[S]	R-4-5	1220-5[S]	R-4-A-5	M-1220-5[S]	3/8	9,5		
		21	0,032	0,81	0,561	14,25	0,536	0,596	13,61	15,14	1219-5[S]	R-4-5	1220-5[S]	R-4-A-5	M-1220-5[S]	3/8	9,5		
		22	0,028	0,71	0,569	14,45	0,536	0,596	13,61	15,14	1219-5[S]	R-4-5	1220-5[S]	R-4-A-5	M-1220-5[S]	3/8	9,5		
3/4	19,0	13	0,095	2,41	0,560	14,22	0,550	0,615	13,97	15,62	1221-5	R-5-5	1222-5	R-5-A-5	M-1222-5	3/8	9,5	K50-600	TES3000 G1450 TesMini2 ES2
		14	0,083	2,11	0,584	14,83	0,574	0,639	14,58	16,23	1223-5	R-6-5	1224-5	R-6-A-5	M-1224-5	3/8	9,5		
		15	0,072	1,83	0,606	15,39	0,590	0,661	14,99	16,79	1225-5	R-7-5	1226-5	R-7-A-5	M-1226-5	3/8	9,5		
3/4	19,0	16	0,065	1,65	0,620	15,75	0,605	0,685	15,37	17,40	1227-5	R-7-5	1228-5	R-7-A-5	M-63	3/8	9,5	K50-1250	TES3000 G1000 or TESMini2 DUO
		17	0,058	1,47	0,634	16,10	0,619	0,699	15,72	17,75	1229-5	R-7-5	1230-5	R-7-A-5	M-1230-5	3/8	9,5		
		18	0,049	1,24	0,652	16,56	0,619	0,699	15,72	17,75	1229-5	R-7-5	1230-5	R-7-A-5	M-1230-5	3/8	9,5		
		19	0,042	1,07	0,666	16,92	0,642	0,722	16,31	18,34	1231-5	R-9-5	1232-5	R-9-A-5	M-63	3/8	9,5		
		20	0,035	0,89	0,680	17,27	0,642	0,722	16,31	18,34	1231-5	R-9-5	1232-5	R-9-A-5	M-63	3/8	9,5		
		21	0,032	0,81	0,686	17,42	0,642	0,722	16,31	18,34	1231-5	R-9-5	1232-5	R-9-A-5	M-63	3/8	9,5		
		22	0,028	0,71	0,694	17,63	0,642	0,722	16,31	18,34	1231-5	R-9-5	1232-5	R-9-A-5	M-63	3/8	9,5		

TUBE OD		TUBE GAUGE		TUBE ID		EXPANSION RANGE				TUBE SHEET THICKNESS				MANDREL	MANDREL SQUARE		PNEUMATIC MOTOR *	ELECTRIC MOTOR *	
										1/2" TO 6"		2-1/4" TO 6-3/4"							
						[INCH]	[MM]	[BWG]	[INCH]	[MM]	[INCH]	[MM]	MIN		MAX	MIN			MAX
7/8	22,2	13	0,095	2,41	0,685	17,40	0,670	0,750	17,02	19,05	1233-5	R-9-5	1234-5	R-9-A-5	M-64-3/8	3/8	9,5	K50-600	TES3000 G1450 or TESMini2 ES2
		14	0,083	2,11	0,709	18,01	0,685	0,774	17,40	19,66	1235-5	R-10-5	1236-5	R-10-A-5	M-65	3/8	9,5		
		16	0,065	1,65	0,745	18,92	0,726	0,815	18,44	20,70	1239-5	R-11-5	1240-5	R-11-A-5	M-1240-5	3/8	9,5		
		17	0,058	1,47	0,759	19,28	0,740	0,829	18,80	21,06	1243-5	R-11-5	1244-5	R-11-A-5	M-67-3/8	3/8	9,5		
		18	0,049	1,24	0,777	19,74	0,740	0,829	18,80	21,06	1243-5	R-11-5	1244-5	R-11-A-5	M-67-3/8	3/8	9,5	K50-1250	TES3000 G1000 or TESMini2 DU0
		19	0,042	1,07	0,791	20,09	0,763	0,852	19,38	21,64	1245-5	R-11-5	1246-5	R-11-A-5	M-68-3/8	3/8	9,5		
		20	0,035	0,89	0,805	20,45	0,763	0,852	19,38	21,64	1245-5	R-11-5	1246-5	R-11-A-5	M-68-3/8	3/8	9,5		
		21	0,032	0,81	0,811	20,60	0,763	0,852	19,38	21,64	1245-5	R-11-5	1246-5	R-11-A-5	M-68-3/8	3/8	9,5		
1	25,4	22	0,028	0,71	0,819	20,80	0,763	0,852	19,38	21,64	1245-5	R-11-5	1246-5	R-11-A-5	M-68-3/8	3/8	9,5	K50-600	TES3000 G1450 or TESMini2 ES2
		12	0,109	2,77	0,782	19,86	0,763	0,852	19,38	21,64	1245-5	R-11-5	1246-5	R-11-A-5	M-68-3/8	3/8	9,5		
		13	0,095	2,41	0,810	20,57	0,791	0,880	20,09	22,35	1247-5	R-13-5	1248-5	R-13-A-5	M-68-3/8	3/8	9,5		
		14	0,083	2,11	0,834	21,18	0,810	0,909	20,57	23,09	1249-5	R-12-5	1250-5	R-12-A-5	M-1250-5	3/8	9,5		
		15	0,072	1,83	0,856	21,74	0,837	0,936	21,26	23,77	1251-5	R-14-5	1252-5	R-14-A-5	M-1252-5	3/8	9,5	K50-1250	TES3000 G1000 or TESMini2 DU0
		16	0,065	1,65	0,87	22,10	0,837	0,936	21,26	23,77	1251-5	R-14-5	1252-5	R-14-A-5	M-1252-5	3/8	9,5		
		17	0,058	1,47	0,884	22,45	0,865	0,964	21,97	24,49	1255-5	R-13-5	1256-5	R-13-A-5	M-1256-5	3/8	9,5		
		18	0,049	1,24	0,902	22,91	0,865	0,964	21,97	24,49	1255-5	R-13-5	1256-5	R-13-A-5	M-1256-5	3/8	9,5		
		19	0,042	1,07	0,916	23,27	0,865	0,964	21,97	24,49	1255-5	R-13-5	1256-5	R-13-A-5	M-1256-5	3/8	9,5		
		20	0,035	0,89	0,93	23,62	0,865	0,964	21,97	24,49	1255-5	R-13-5	1256-5	R-13-A-5	M-1256-5	3/8	9,5		
		21	0,032	0,81	0,936	23,77	0,883	0,982	22,43	24,94	1257-5	R-15-5	1258-5	R-15-A-5	M-71-3/8	3/8	9,5		
		22	0,028	0,71	0,944	23,98	0,883	0,982	22,43	24,94	1257-5	R-15-5	1258-5	R-15-A-5	M-71-3/8	3/8	9,5		
1-1/8	28,5	12	0,109	2,77	0,907	23,04	0,883	0,982	22,43	24,94	1257-5	R-15-5	1258-5	R-15-A-5	M-71-3/8	3/8	9,5	K60-400	TES3000 G1000 or TESMini2 DU1
		13	0,095	2,41	0,935	23,75	0,916	1,015	23,27	25,78	1259-5	R-16-5	1260-5	R-16-A-5	M-1260-5	1/2	12,7		
		14	0,083	2,11	0,959	24,36	0,935	1,044	23,75	26,52	1261-5	R-17-5	1262-5	R-17-A-5	M-1262-5	1/2	12,7		
1-1/4	31,7	15	0,072	1,83	1,106	28,09	1,087	1,196	27,61	30,38	1275-5	R-21-5	1276-5	R-21-A-5	M-1276-5	1/2	12,7	K60-400	TES3000 G1000 or TESMini2 DU1
		16	0,065	1,65	1,120	28,45	1,087	1,196	27,61	30,38	1275-5	R-21-5	1276-5	R-21-A-5	M-1276-5	1/2	12,7		
		17	0,058	1,47	1,134	28,80	1,115	1,231	28,32	31,27	1279-5	R-21-5	1280-5	R-21-A-5	M-1280-5	1/2	12,7		
		18	0,049	1,24	1,152	29,26	1,115	1,231	28,32	31,27	1279-5	R-21-5	1280-5	R-21-A-5	M-1280-5	1/2	12,7		
		19	0,042	1,07	1,166	29,62	1,115	1,231	28,32	31,27	1279-5	R-21-5	1280-5	R-21-A-5	M-1280-5	1/2	12,7		
		20	0,035	0,89	1,180	29,97	1,115	1,231	28,32	31,27	1279-5	R-21-5	1280-5	R-21-A-5	M-1280-5	1/2	12,7		
		21	0,032	0,81	1,186	30,12	1,115	1,231	28,32	31,27	1279-5	R-21-5	1280-5	R-21-A-5	M-1280-5	1/2	12,7		
		22	0,028	0,71	1,194	30,33	1,115	1,231	28,32	31,27	1279-5	R-21-5	1280-5	R-21-A-5	M-1280-5	1/2	12,7		
1-3/8	34,9	12	0,109	2,77	1,157	29,39	1,133	1,242	28,78	31,55	1281-5	R-21-5	1282-5	R-21-A-5	M-1282-5	1/2	12,7	K60-250	
		14	0,083	2,11	1,209	30,71	1,179	1,294	29,95	32,87	1285-5	R-23-5	1286-5	R-23-A-5	M-1282-5	1/2	12,7		
1-1/2	38,1	17	0,058	1,47	1,384	35,15	1,331	1,472	33,81	37,39	1299-5	R-29-5	1300-5	R-29-A-5	M-1300-5	1/2	12,7	K60-900	TES3000 G1000 or TESMini2 ES2
		18	0,049	1,24	1,402	35,61	1,331	1,472	33,81	37,39	1299-5	R-29-5	1300-5	R-29-A-5	M-1300-5	1/2	12,7		
		19	0,042	1,07	1,416	35,97	1,331	1,472	33,81	37,39	1299-5	R-29-5	1300-5	R-29-A-5	M-1300-5	1/2	12,7		
		20	0,035	0,89	1,430	36,32	1,331	1,472	33,81	37,39	1299-5	R-29-5	1300-5	R-29-A-5	M-1300-5	1/2	12,7		
		21	0,032	0,81	1,436	36,47	1,331	1,472	33,81	37,39	1299-5	R-29-5	1300-5	R-29-A-5	M-1300-5	1/2	12,7		
		22	0,028	0,71	1,444	36,68	1,331	1,472	33,81	37,39	1299-5	R-29-5	1300-5	R-29-A-5	M-1300-5	1/2	12,7		

* Motor recommendation applies only to most popular cases with a standard percentage of the wall reduction. The recommendation can be different for thicker tube sheet, harder and exotic metal tube and a higher percentage of wall reduction.

F600 SERIES FLARE TYPE TUBE EXPANDERS



BASIC INFO


Tools for simultaneously expanding and flaring tubes in condensers, chillers, heat exchangers, fin fan coolers, feedwater heaters and surface condensers. Recommended for stainless steel, titanium, and other exotic thin wall tubes from GA 18 (1,2 mm) and less.

Expanders are supplied as a standard with STC collar but for 5-roll expanders, especially for 19 to 22 GA tubes, TWTC thin wall thrust collar is recommended. Many different shaped rolls are available.

WORKING RANGE


TUBE ID	TUBE OD	TUBE SHEET
13,51 – 22,45 mm	15,8 – 25,4 MM	38,1 - 57,1 MM
0,532 - 0,884"	5/8" to 1"	1-1/2" to 2-1/4"

OPTIONAL SPARES AND ACCESSORIES



ROLLS ON REQUEST

→ PAGE 9



THRUST COLLARS

→ PAGE 9



ROLLING MOTORS

→ CHAPTER PAGE 38

TUBE ID		ROLL LENGTH 1-1/2" (38,1 MM)		ROLL LENGTH 2-1/4" (57,1 MM)		EXPANSION RANGE				FLARE ROLL	MANDREL	RECCOMENDED DRIVE*	
						[INCH]		[MM]					
[INCH]	[MM]	TOOL NO.	ROLL NO.	TOOL NO.	ROLL NO.	MIN	MAX	MIN	MAX			ELECTRIC	PNEUMATIC
0,532	13,51	619	K-7	620	K-7A	0,511	0,570	12,98	14,48	F-8	M-6	TESMini 2, ES2	K50-600
0,560	14,22	621	K-8	622	K-8A	0,539	0,606	13,69	15,39	F-8	M-8	TESMini 2, ES2	K50-600
0,584	14,83	623	K-9	624	K-9A	0,562	0,629	14,27	15,98	F-9	M-8	TESMini 2, ES2	K50-600
0,606	15,39	625	K-10	626	K-10A	0,586	0,649	14,88	16,48	F-10	M-8	TESMini 2, ES2	K50-600
0,620	15,75	627	K-10	628	K-10A	0,594	0,677	15,09	17,20	F-10	M-9	TESMini 2, ES2	K50-600
0,634	16,10	629	K-11	630	K-11 A	0,610	0,688	15,49	17,48	F-11	M-9	TESMini 2, ES2	K50-400
0,657	16,69	631	K-12	632	K-12A	0,633	0,712	16,08	18,08	F-12	M-9	TESMini 2, ES2	K50-400
0,670	17,02	641	K-13	642	K-13A	0,645	0,724	16,38	18,39	F-13	M-9	TESMini 2, ES2	K50-400
0,685	17,40	633	K-13	634	K-13A	0,661	0,740	16,79	18,80	F-13	M-10	TESMini 2, ES2	K50-400
0,709	18,01	635	K-14	636	K-14A	0,677	0,763	17,20	19,38	F-14	M-11	TESMini 2, ES2	K60-900
0,731	18,57	637	K-15	638	K-15A	0,700	0,791	17,78	20,09	F-15	M-11	TESMini 2, ES2	K60-900
0,745	18,92	639	K-15	640	K-15A	0,716	0,807	18,19	20,50	F-15	M-12	TESMini 2, ES2	K60-900
0,760	19,30	643	K-16	644	K-16A	0,732	0,818	18,59	20,78	F-16	M-12	TESMini 2, DU1	K60-900
0,782	19,86	645	K-17	646	K-17A	0,751	0,842	19,08	21,39	F-17	M-12	TESMini 2, DU1	K60-900
0,795	20,19	653	K-20	654	K-20A	0,767	0,866	19,48	22,00	F-20	M-13	TESMini 2, DU1	K60-900
0,810	20,57	647	K-18	648	K-18A	0,779	0,870	19,79	22,10	F-18	M-12	TESMini 2, DU1	K60-900
0,834	21,18	649	K-18	650	K-18A	0,799	0,897	20,29	22,78	F-18	M-13	TESMini 2, DU1	K60-900
0,856	21,74	651	K-19	652	K-19A	0,826	0,921	20,98	23,39	F-19	M-13	TESMini 2, DU1	K60-900
0,884	22,45	655	K-21	656	K-21A	0,854	0,948	21,69	24,08	F-21	M-13	TESMini 2, DU1	K60-900

* Motor recommendation applies only to most popular cases with a standard percentage of the wall reduction. The recommendation can be different for thicker tube sheet, harder and exotic metal tube and a higher percentage of wall reduction.

8012 SERIES CONDENSER TUBE EXPANDERS



BASIC INFO


Tools for expanding tubes in condensers, chillers, heat exchangers, fin fan coolers, feedwater heaters and surface condensers.

Expanders are available in regular and long reaches (some diameters, up to 30 cm) and as the 5-rolls version. Many different shaped rolls are available.

WORKING RANGE


TUBE ID	TUBE OD	TUBE SHEET
8,48 - 36,32 mm	44,4 - 76,2 mm	12,7 - 101,6 mm
0,334 - 1,430"	1-3/4" to 3"	1-1/2" to 2-1/4"

OPTIONAL SPARES AND ACCESSORIES



ROLLS ON REQUEST

→ PAGE 9



THRUST COLLARS

→ PAGE 9



ROLLING MOTORS

→ CHAPTER PAGE 38

TUBE OD		TUBE GAUGE			TUBE ID		EXPANSION RANGE				TOOL NO.	ROLL NO.	MANDREL	MANDREL	PNEUMATIC MOTOR *	ELECTRIC MOTOR *
[INCH]	[MM]	[BWG]	[INCH]	[MM]	[INCH]	[MM]	[INCH]		[MM]							
							MIN	MAX	MIN	MAX				[INCH]		
1-3/4	44,4	8	0,165	4,19	1,42	36,07	1,368	1,55	34,75	39,37	8012-1-3/4-8	R-33-A	M-90	3/4	K60-400	TESMini2 DU1
		10	0,134	3,40	1,482	37,64	1,420	1,607	36,07	40,82	8012-1-3/4-10	R-37-A	M-90	3/4		
		11	0,120	3,05	1,510	38,35	1,454	1,635	36,93	41,53	8012-1-3/4-11	R-42	M-90	3/4		
		12	0,109	2,77	1,532	38,91	1,482	1,657	37,64	42,09	8012-1-3/4-12	R-44	M-90	3/4		
		13	0,095	2,41	1,560	39,62	1,510	1,685	38,35	42,80	8012-1-3/4-13	R-46	M-90	3/4		
		14	0,083	2,11	1,584	40,23	1,532	1,709	38,91	43,41	8012-1-3/4-14	R-48	M-90	3/4	K60-900	
2	50,8	8	0,165	4,19	1,670	42,42	1,595	1,795	40,51	45,59	8012-2-8	R-48	M-91	3/4	K60-250	TESMini2 K90-E-190
		10	0,134	3,40	1,732	43,99	1,640	1,857	41,66	47,17	8012-2-10	R-50	M-91	3/4		
		11	0,120	3,05	1,760	44,70	1,670	1,885	42,42	47,88	8012-2-11	R-52	M-91	3/4		
		12	0,109	2,77	1,782	45,26	1,704	1,907	43,28	48,44	8012-2-12	R-54	M-91	3/4		
		13	0,095	2,41	1,810	45,97	1,732	1,956	43,99	49,68	8012-2-13-18	R-56	M-91	3/4		
		14	0,083	2,11	1,834	46,58	1,732	1,956	43,99	49,68	8012-2-13-18	R-56	M-91	3/4		
		15	0,072	1,83	1,856	47,14	1,732	1,956	43,99	49,68	8012-2-13-18	R-56	M-91	3/4		
		16	0,065	1,65	1,870	47,50	1,732	1,956	43,99	49,68	8012-2-13-18	R-56	M-91	3/4		
		17	0,058	1,47	1,884	47,85	1,732	1,956	43,99	49,68	8012-2-13-18	R-56	M-91	3/4		
18	0,049	1,24	1,902	48,31	1,732	1,956	43,99	49,68	8012-2-13-18	R-56	M-91	3/4				
2-1/4	57,1	10	0,134	3,40	1,982	50,34	1,890	2,107	48,01	53,52	8012-2-1/4-10	R-56	M-92	3/4	K60-250	TESMini2 K90-E-190
		11	0,120	3,05	2,010	51,05	1,920	2,135	48,77	54,23	8012-2-1/4-11	R-58	M-92	3/4		
		12	0,109	2,77	2,032	51,61	1,954	2,157	49,63	54,79	8012-2-1/4-12	R-60	M-92	3/4		
		13	0,095	2,41	2,060	52,32	1,982	2,185	50,34	55,50	8012-2-1/4-13-16	R-62	M-92	3/4		
		14	0,083	2,11	2,084	52,93	1,982	2,185	50,34	55,50	8012-2-1/4-13-16	R-62	M-92	3/4		
		15	0,072	1,83	2,106	53,49	1,982	2,185	50,34	55,50	8012-2-1/4-13-16	R-62	M-92	3/4		
		16	0,065	1,65	2,120	53,85	1,982	2,185	50,34	55,50	8012-2-1/4-13-16	R-62	M-92	3/4		
2-1/2	63,5	10	0,134	3,40	2,232	56,69	2,140	2,407	54,36	61,14	8012-2-1/2-10-12	R-64	M-93	3/4	K60-250	TESMini2 K90-E-190
		11	0,120	3,05	2,260	57,40	2,140	2,407	54,36	61,14	8012-2-1/2-10-12	R-64	M-93	3/4		
		12	0,109	2,77	2,282	57,96	2,140	2,407	54,36	61,14	8012-2-1/2-10-12	R-64	M-93	3/4		
		13	0,095	2,41	2,310	58,67	2,232	2,450	56,69	62,23	8012-2-1/2-13-18	R-64	M-94	3/4		
		14	0,083	2,11	2,334	59,28	2,232	2,450	56,69	62,23	8012-2-1/2-13-18	R-64	M-94	3/4		
		15	0,072	1,83	2,356	59,84	2,232	2,450	56,69	62,23	8012-2-1/2-13-18	R-64	M-94	3/4		
		16	0,065	1,65	2,370	60,20	2,232	2,450	56,69	62,23	8012-2-1/2-13-18	R-64	M-94	3/4		
		17	0,058	1,47	2,384	60,55	2,232	2,450	56,69	62,23	8012-2-1/2-13-18	R-64	M-94	3/4		
		18	0,049	1,24	2,402	61,01	2,232	2,450	56,69	62,23	8012-2-1/2-13-18	R-64	M-94	3/4		

TUBE OD		TUBE GAUGE			TUBE ID		EXPANSION RANGE				TOOL NO.	ROLL NO.	MANDREL	MANDREL	PNEUMATIC MOTOR *	ELECTRIC MOTOR *
[INCH]	[MM]	[BWG]	[INCH]	[MM]	[INCH]	[MM]	MIN	MAX	MIN	MAX						
2-3/4	69,8	10	0,134	3,40	2,482	63,04	2,390	2,702	60,71	68,63	8012-2-3/4-10-16	R-66	M-96	1	K72-RT-90	TESMini2 K90-E-90
		11	0,120	3,05	2,510	63,75	2,390	2,702	60,71	68,63	8012-2-3/4-10-16	R-66	M-96	1		
		12	0,109	2,77	2,532	64,31	2,390	2,702	60,71	68,63	8012-2-3/4-10-16	R-66	M-96	1		
		13	0,095	2,41	2,560	65,02	2,390	2,702	60,71	68,63	8012-2-3/4-10-16	R-66	M-96	1		
		14	0,083	2,11	2,584	65,63	2,390	2,702	60,71	68,63	8012-2-3/4-10-16	R-66	M-96	1		
		15	0,072	1,83	2,606	66,19	2,390	2,702	60,71	68,63	8012-2-3/4-10-16	R-66	M-96	1		
		16	0,065	1,65	2,620	66,55	2,390	2,702	60,71	68,63	8012-2-3/4-10-16	R-66	M-96	1		
3	76,2	8	0,165	4,19	2,670	67,82	2,560	2,829	65,02	71,86	8012-3-8-9	R-67	M-97	1	K72-RT-90	TESMini2 K90-E-90
		9	0,148	3,76	2,704	68,68	2,560	2,829	65,02	71,86	8012-3-8-9	R-67	M-97	1		
		10	0,134	3,40	2,732	69,39	2,640	2,952	67,06	74,98	8012-3-10-18	R-67	M-96	1		
		11	0,120	3,05	2,760	70,10	2,640	2,952	67,06	74,98	8012-3-10-18	R-67	M-96	1		
		12	0,109	2,77	2,782	70,66	2,640	2,952	67,06	74,98	8012-3-10-18	R-67	M-96	1		
		13	0,095	2,41	2,810	71,37	2,640	2,952	67,06	74,98	8012-3-10-18	R-67	M-96	1		
		14	0,083	2,11	2,834	71,98	2,640	2,952	67,06	74,98	8012-3-10-18	R-67	M-96	1		
		15	0,072	1,83	2,856	72,54	2,640	2,952	67,06	74,98	8012-3-10-18	R-67	M-96	1		
		16	0,065	1,65	2,870	72,90	2,640	2,952	67,06	74,98	8012-3-10-18	R-67	M-96	1		
		17	0,058	1,47	2,884	73,25	2,640	2,952	67,06	74,98	8012-3-10-18	R-67	M-96	1		
		18	0,049	1,24	2,902	73,72	2,640	2,952	67,06	74,98	8012-3-10-18	R-67	M-96	1		

* Motor recommendation applies only to most popular cases with a standard percentage of the wall reduction. The recommendation can be different for thicker tube sheet, harder and exotic metal tube and a higher percentage of wall reduction.

TACK CONICAL EXPANDERS SERIES




BASIC INFO

Special, conical expanders to expand the tube on the short length before welding.

WORKING RANGE


TUBE ID	TUBE OD
8,0 - 50,0 mm	9,5 - 50,8 mm
0,315 - 1,969"	3/8" to 1"

OPTIONAL SPARES AND ACCESSORIES



ROLLS ON REQUEST

→ PAGE 9



THRUST COLLARS

→ PAGE 9



ROLLING MOTORS

→ CHAPTER PAGE 38


EXPANSION RANGE				TOOL	ROLLS	MANDREL	MANDREL SQUARE		RECOMMENDED MOTOR *	
[MM]		[INCH]					[MM]	[INCH]	AIR	ELECTRIC
MIN	MAX	MIN	MAX							
7,80	9,90	0,307	0,390	TRE-797	R-797	M-797	9,5	3/8	K20-1800	TesMini 2 with HT-0
8,60	11,00	0,339	0,433	TRE-801	R-1	M-1	9,5	3/8	K20-1800	TesMini 2 with HT-0
9,40	12,00	0,370	0,472	TRE-805	R-3	M-2	9,5	3/8	K20-1800	TesMini 2 with HT-0
11,30	14,30	0,445	0,563	TRE-811	R-5	M-5	9,5	3/8	K20-1800	TesMini 2 with HT-0
11,90	15,10	0,469	0,594	TRE-815	R-6	M-6	9,5	3/8	K20-1800	TesMini 2 with HT-0
12,30	15,60	0,484	0,614	TRE-819	R-7	M-6	9,5	3/8	K20-1800	TesMini 2 with HT-0
13,70	17,00	0,539	0,669	TRE-823	R-9	M-8	9,5	3/8	K20-1800	TesMini 2 with HT-0
15,50	19,10	0,610	0,752	TRE-831	R-12	M-9	9,5	3/8	K20-550	TesMini 2 with DU-0
16,20	19,80	0,638	0,780	TRE-833	R-13	M-10	9,5	3/8	K20-550	TesMini 2 with DU-0
17,90	21,85	0,705	0,860	TRE-843	R-16	M-12	9,5	3/8	K20-550	TesMini 2 with DU-0
19,70	23,90	0,776	0,941	TRE-849	R-18	M-13	9,5	3/8	K20-550	TesMini 2 with DU-0
21,10	25,30	0,831	0,996	TRE-855	R-21	M-13	9,5	3/8	K50-1250	TesMini 2 with DU-0
23,50	28,00	0,925	1,102	TRE-863	R-24	M-15	12,7	1/2	K50-1250	TesMini 2 with DU-0
25,60	30,00	1,008	1,181	TRE-871	R-28	M-17	12,7	1/2	K50-1250	TesMini 2 with DU-0
27,90	32,35	1,098	1,274	TRE-881	R-32	M-18	12,7	1/2	K50-1250	TesMini 2 with DU-0
29,10	33,70	1,146	1,327	TRE-885	R-34	M-20	12,7	1/2	K50-600	TesMini 2 with DU-0
31,80	36,40	1,252	1,433	TRE-895	R-37	M-21	12,7	1/2	K50-600	TesMini 2 with DU-0
32,90	38,20	1,295	1,504	TRE-899	R-38	M-22	12,7	1/2	K50-600	TesMini 2 with DU-1
36,40	43,20	1,433	1,701	TRE-9012-13/4-12	R-44	M-90	19,1	3/4	K60-900	TesMini 2 with DU-1
39,20	46,80	1,543	1,843	TRE-8012-2-8	R-48	M-91	19,1	3/4	K60-900	TesMini 2 with DU-1
41,20	49,10	1,622	1,933	TRE-8012-2-11	R-52	M-91	19,1	3/4	K60-900	TesMini 2 with DU-1
42,60	50,90	1,677	2,004	TRE-8012-2-13-18	R-56	M-91	19,1	3/4	K60-900	TesMini 2 with DU-1
46,70	54,80	1,839	2,157	TRE-21/4-10	R-56	M-92	19,1	3/4	K60-900	TesMini 2 with DU-1

* Motor recommendation applies only to most popular cases with a standard percentage of the wall reduction. The recommendation can be different for thicker tube sheet, harder and exotic metal tube and a higher percentage of wall reduction.

SPECIAL TUBE EXPANDERS



REFINERY TUBE EXPANDER

Tube expander for straight rolling or rolling and flaring very thick-walled tubes in cracking furnace tube seats for tubes outside diameter from 50 to 250 mm (2"-10") and gauges from 6 to 15 mm (0,19" to 0,59"). Flaring 10 to 15 degree. Roll length 38,1 to 101 mm (1-1/2" - 4"). Made on request to drawing of the tube seat.

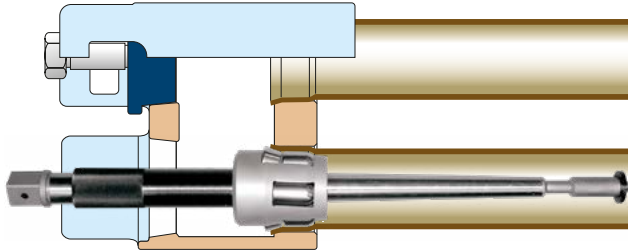

SUGAR REFINERY EXPANDER

These are fixed rolling length special purpose tools which may be power or hand-driven. They are self-feeding parallel-rolling type. When ordering please give precise details of vessel in which the expander is to be used, quoting size and length of tube, distance over tube plates, tube plate thickness and any tube projection details. Ideally a drawing should be provided.

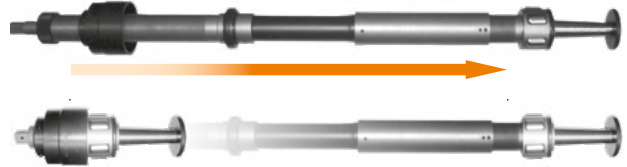

NOTCHING & EXPANDING



NE notching&expanding type tube expander for thin tube sheet and thin wall tubes. Expand and notch the tube in one operation. The notches lock the tube in front and back side of the tube sheet and prevent to unseal during the transportation or expanding the near by and already expanded tubes. The expansion range is adjustable within 0,005 mm. Do not need the torque controlled drive.



STEP-BY-STEP



STEP-BY-STEP expander are an excellent tool for fast tube rolling in thick tube sheets, from 6" to 24". The Expanders have grooves spaced at 1" (25,4 mm) increments along the cage of the tool, which allows the spring loaded thrust collar, to quickly and efficiently travel along the complete length of the tool. Significant time savings are achieved with this fast step rolling throughout the full width of the tube sheet.

PSE PIPE



PSE expanders are designed to true up the ends of pipe and also to enlarge pipe inside diameters to a specific size in order to create the correct clearance between the pipe OD and ID prior to brazing or silver soldering. The Threaded mandrel allows fast and accurate sizing of the pipe end. Available up to 8" OD.

TWTC



5-Roll expander with TWTC thin wall thrust collar.

LUBRICATION-COOLING BOX




Condenser tube expander with cooling-lubricating box. Made upon order only.

LINSEN EXPANDERS

LINSEN expanders can be driven by electric or pneumatic drills. Designed to produce tube end connections without fittings. Enlarges tube end without distortions or buckling and leaving. 0,015" (0,38 mm) clearance that another tube with the same outside diameter can be inserted and soldered. It is excellent for U-tubes, short bends, for copper, brass aluminium and thin steel tubes. Available from 3/8" (9,5 mm) to 2" (50,8 mm). For more details contact factory.

**SR EXPANDERS**

SR series xpanders are designed for expanding tubes with minimum travel of mandrel. Expander mandrel is short and it allows to use SR expanders near tube bends or ID fixed tubes.

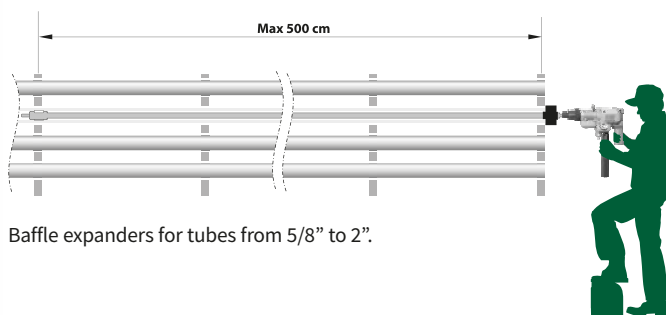BAFFLE TUBE EXPANDERS

Baffle expanders for tubes from 5/8" to 2".

5-ROLL EXPANDER WITH NYLON BUSH

5-Roll expander with nylon bush in front of the cage to protect the tubes from the scratches. Used for tytanium tubes.



RECOMMENDED MOTORS FOR BOILER TUBE EXPANDERS

Varies depending upon tube material, gauge, and tube sheet thickness. For tubes above 4" (101,6 mm) we recommend model K77-RT-25

TOOL NO	K73-RT-375	K73-RT-280	K73-RT-190	TESMINI K90-E-190	K72-RT-90	K90-E-90
KS Series						
KS-19	OK					
KS-20	OK					
KS-22	OK					
KS-23	OK					
KS-24	OK					
KS-25	OK					
KS-27	OK					
KS-28	OK	OK		OK		
KS-29	OK	OK		OK		
KS-30	OK	OK		OK		
KS-32	OK	OK	OK	OK		
KS-35	OK	OK	OK	OK		OK
KS-37	OK	OK	OK	OK		OK
KS-40	OK	OK	OK	OK	OK	OK
KS-42	OK	OK	OK	OK	OK	OK
KS-44		OK	OK	OK	OK	OK
KS-47		OK	OK	OK	OK	OK
KS-49		OK	OK	OK	OK	OK
KS-52		OK	OK	OK	OK	OK
KS-54			OK	OK	OK	OK
KS-57			OK	OK	OK	OK
KS-60					OK	OK
KS-65					OK	OK
KS-68					OK	OK
KS-72					OK	OK
KS-77					OK	OK
KS-82					OK	OK
KS-86					OK	OK
KS-90					OK	OK
KS-96					OK	OK
PZ Series						
PZ-19	OK					
PZ-20	OK					
PZ-22	OK					
PZ-25	OK					
PZ-28	OK	OK		OK		
PZ-29	OK	OK		OK		

TOOL NO	K73-RT-375	K73-RT-280	K73-RT-190	TESMINI K90-E-190	K72-RT-90	K90-E-90
PZ-30	OK	OK		OK		
PZ-32	OK	OK	OK	OK		
PZ-35	OK	OK	OK	OK		
PZ-37	OK	OK	OK	OK		
PZ-40	OK	OK	OK	OK	OK	OK
PZ-42	OK	OK	OK	OK	OK	OK
PZ-44		OK	OK	OK	OK	OK
PZ-47		OK	OK	OK	OK	OK
PZ-49		OK	OK	OK	OK	OK
PZ-52		OK	OK	OK	OK	OK
PZ-54			OK	OK	OK	OK
PZ-57			OK	OK	OK	OK
PZ-60					OK	OK
PZ-65					OK	OK
PZ-68					OK	OK
PZ-72					OK	OK
PZ-77					OK	OK
PZ-82					OK	OK
PZ-86					OK	OK
PZ-90					OK	OK
PZ-96					OK	OK
P2 Series						
P2-280		OK		OK		
P2-290		OK		OK		
P2-300		OK		OK		
P2-320		OK	OK	OK		
P2-350		OK	OK	OK		OK
P2-370		OK	OK	OK		OK
P2-400		OK	OK	OK	OK	OK
P2-420		OK	OK	OK	OK	OK
P2-440		OK	OK	OK	OK	OK
P2-470		OK	OK	OK	OK	OK
P2-490		OK	OK	OK	OK	OK
P2-520			OK	OK	OK	OK
P2-540			OK	OK	OK	OK
P2-570					OK	OK
P2-600					OK	OK
P2-650					OK	OK

TOOL NO	K73-RT-375	K73-RT-280	K73-RT-190	TESMINI K90-E-190	K72-RT-90	K90-E-90
P2-680					OK	OK
FTKS Series						
FTKS-508			OK			OK
FTKS-635			OK		OK	OK
FTKS-762					OK	OK
FTPZ Series						
FTPZ-508			OK			OK
FTPZ-635			OK		OK	OK
FTPZ-762					OK	OK
UCRBT Series						
K-41633-00					OK	OK
K-42158-00					OK	OK
K-41359-00					OK	OK

SHORT MANDREL'S EXPANSION RANGE

MANDREL SET	EXPANSION RANGE ON THE EACH MANDREL												PROTRUDING FROM THE FRONT OF CAGE		SQUARE
	A				B				C						
	[MM]		[INCH]		[MM]		[INCH]		[MM]		[INCH]				
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MM	INCH	
TKK-19	19,00	20,00	0,748	0,787	20,00	21,00	0,787	0,827	21,00	22,00	0,827	0,866	40,00	1,575	½"
TKK-20	20,00	21,00	0,787	0,826	21,00	22,00	0,827	0,866	22,00	23,00	0,866	0,906	40,00	1,575	½"
TKK-22	22,00	23,00	0,866	0,905	23,00	24,00	0,906	0,945	24,00	25,00	0,945	0,984	40,00	1,575	½"
TKK-23	23,00	24,00	0,906	0,944	24,00	25,00	0,945	0,984	25,00	26,00	0,984	1,024	40,00	1,575	½"
TKK-24	24,00	25,00	0,945	0,984	25,00	26,00	0,984	1,024	26,00	27,00	1,024	1,063	40,00	1,575	½"
TKK-25	25,00	26,00	0,984	1,023	26,00	27,00	1,024	1,063	27,00	28,00	1,063	1,102	40,00	1,575	½"
TKK-27	27,00	28,00	1,063	1,102	28,00	29,00	1,102	1,142	29,00	30,00	1,142	1,181	40,00	1,575	½"
TKK-28	28,00	29,30	1,102	1,153	29,30	30,60	1,154	1,205	30,60	32,00	1,205	1,260	50,00	1,969	½"
TKK-29	29,00	30,30	1,142	1,192	30,30	31,60	1,193	1,244	31,60	33,00	1,244	1,299	50,00	1,969	½"
TKK-30	30,00	31,30	1,181	1,232	31,30	32,60	1,232	1,283	32,60	34,00	1,283	1,339	50,00	1,969	½"
TKK-32	32,00	33,30	1,260	1,311	33,30	34,60	1,311	1,362	34,60	36,00	1,362	1,417	50,00	1,969	½"
TKK-37*1	35,00	37,00	1,378	1,456	37,00	39,00	1,457	1,535	39,00	41,00	1,535	1,614	65,00	2,559	¾"
TKK-37	37,00	39,00	1,457	1,535	39,00	41,00	1,535	1,614	41,00	43,00	1,614	1,693	65,00	2,559	¾"
TKK-42*2	40,00	42,00	1,575	1,653	42,00	44,00	1,654	1,732	44,00	46,00	1,732	1,811	65,00	2,559	¾"
TKK-42	42,00	44,00	1,654	1,732	44,00	46,00	1,732	1,811	46,00	48,00	1,811	1,890	65,00	2,559	¾"
TKK-44	44,00	46,00	1,732	1,811	46,00	48,00	1,811	1,890	48,00	50,00	1,890	1,969	65,00	2,559	¾"
TKK-47	47,00	49,40	1,850	1,944	49,40	51,70	1,945	2,035	51,70	54,00	2,035	2,126	75,00	2,953	¾"
TKK-49	49,00	51,40	1,929	2,023	51,40	53,70	2,024	2,114	53,70	56,00	2,114	2,205	75,00	2,953	¾"
TKK-49*3	52,00	54,60	2,047	2,149	54,40	56,90	2,142	2,240	57,70	59,20	2,272	2,331	75,00	2,953	¾"
TKK-54	54,00	56,60	2,126	2,228	56,60	59,30	2,228	2,335	59,30	62,00	2,335	2,441	82,00	3,228	¾"
TKK-57	57,00	60,00	2,244	2,362	60,00	63,00	2,362	2,480	63,00	66,00	2,480	2,598	90,00	3,543	¾"
TKK-65*4	60,00	63,00	2,362	2,480	63,00	66,00	2,480	2,598	66,00	69,00	2,598	2,717	90,00	3,543	¾"
TKK-65	65,00	68,00	2,559	2,677	68,00	71,00	2,677	2,795	71,00	74,00	2,795	2,913	90,00	3,543	¾"
TKK-72*5	68,00	71,40	2,677	2,811	71,40	74,70	2,811	2,941	74,70	78,00	2,941	3,071	100,00	3,937	1"
TKK-72	72,00	75,30	2,835	2,964	75,40	78,60	2,969	3,094	78,70	82,00	3,098	3,228	100,00	3,937	1"
TKK-77	77,00	80,40	3,031	3,165	80,40	83,70	3,165	3,295	83,70	87,00	3,295	3,425	100,00	3,937	1"
TKK-82	82,00	85,40	3,228	3,362	85,40	88,70	3,362	3,492	88,70	92,00	3,492	3,622	100,00	3,937	1"
TKK-86	86,00	89,40	3,386	3,519	89,40	92,70	3,520	3,650	92,70	96,00	3,650	3,780	100,00	3,937	1"
TKK-90	90,00	94,00	3,543	3,700	94,00	98,00	3,701	3,858	98,00	102,00	3,858	4,016	115,00	4,528	1"
TKK-96	96,00	100,00	3,780	3,937	100,00	104,00	3,937	4,094	104,00	108,00	4,094	4,252	115,00	4,528	1"

*1 re. expander KS-35

*2 re. expander KS-40

*3 re. expander KS-52


*4 re. expander KS-60

*5 re. expander KS-68

AVAILABLE ROLLS LENGTH

ROLLS	ROLL LENGTH		TUBE SHEET THICKNESS	
	[INCH]	[MM]	[INCH]	[MM]
A	1,574	40	½" - ¾"	12 - 19
B	2,362	60	⅞" - 1¼"	22 - 32
C	3,149	80	1⅜" - 1¾"	35 - 45
D	3,937	100	1⅞" - 2¼"	48 - 58

BOTTLE ROLLS



For KS and PZ expanders there are available special bottle type rolls which reduce the effective roll length. Max. for 10 mm from the front of the roll.

KS SERIES

Three expansion rolls with three flare rolls, self feeding boiler expanders. This expanders simultaneously expand and flare the tube. An excellent expander for re-rolling leaky tubes and for new constructions of water tube boilers, fire tube boilers, economizers, air heaters. Expanders with 6 expansion rolls and 3 flare rolls are available on request. K70's right-angle rolling motors are recommended to be used with this expanders.



TUBE OD		TUBE GAUGE	TOOL NO.	EXPANSION RANGE				STDANDARD ROLLS			OTHER ROLL LENGTH PAGE C3	MANDREL		SHORT MANDRELL SET (3 PCS.)			SQUARE		
				[MM]		[INCH]		NO.	LENGHT			NO.	LENGTH		NO.	LENGTH			
[INCH]	[MM]	[BWG]		MIN	MAX	MIN	MAX			[MM]	[INCH]					[MM]	[INCH]		[MM]
1"	25,40	9-11	KS-19	19	22	0,75	0,87	RR12RK5	42	1,65	A	TK19	195	7,68	-	-	-	1/2	12,7
		13-14	KS-20	20	23	0,79	0,91	RR12RK5	42	1,65	A	TK20	195	7,68	-	-	-	1/2	12,7
1-1/4"	31,75	7	KS-22	22	25	0,87	0,98	RR12RK5	42	1,65	A	TK22	195	7,68	-	-	-	1/2	12,7
		9	KS-23	23	26	0,91	1,02	RR13RK6	42	1,65	A	TK23	195	7,68	-	-	-	1/2	12,7
		10	KS-24	24	27	0,94	1,06	RR13RK6	42	1,65	A	TK24	195	7,68	-	-	-	1/2	12,7
		11-13	KS-25	25	28	0,98	1,10	RR13RK6	42	1,65	A	TK25	195	7,68	-	-	-	1/2	12,7
		12-14	KS-26	26	29	1,02	1,14	RR13RK6	42	1,65	A	TK26	195	7,68	-	-	-	1/2	12,7
		14-15	KS-27	27	30	1,06	1,18	RR15RK7	42	1,65	A	TK27	200	7,87	-	-	-	1/2	12,7
		16	KS-28	28	32	1,10	1,26	RR16RK8	42	1,65	B C	TK28	260	10,24	TKK28	175	6,89	3/4	19,0
		7-10	KS-29	29	33	1,14	1,30	RR16RK8	42	1,65	B C	TK29	260	10,24	TKK29	175	6,89	3/4	19,0
1-1/2"	38,10	10-12	KS-30	30	34	1,18	1,34	RR16RK8	42	1,65	B C	TK30	260	10,24	TKK30	175	6,89	3/4	19,0
		12-14	KS-32	32	36	1,26	1,42	RR17RK9	42	1,65	B C	TK32	260	10,24	TKK32	175	6,89	3/4	19,0
		13-20	KS-33	33	38	1,99	1,49	RP33RR33	42	1,65	B C	TK33	290	11,41	TKK33	181	7,12	3/4	19,0
		8-9	KS-35	35	41	1,38	1,61	RR21RK35	42	1,65	B C	TK37	310	12,20	TKK37	188	7,40	3/4	19,0
1-3/4"	44,45	10-12	KS-37	37	43	1,46	1,69	RR22RK10	42	1,65	B C	TK37	310	12,20	TKK37	188	7,40	3/4	19,0
		12-18	KS-39	39	45	1,53	1,77	RR40RK40	42	1,65	B C	TK37	310	12,20	TKK37	188	7,40	3/4	19,0
2"	50,80	7-9	KS-40	40	46	1,57	1,81	RR40RK40	50	1,97	A B C D	TK42	310	12,20	TKK42	205	8,07	3/4	19,0
		10-13	KS-42	42	48	1,65	1,89	RR23RK11	50	1,97	A B C D	TK42	310	12,20	TKK42	205	8,07	3/4	19,0
		12-14	KS-44	44	50	1,73	1,97	RR23RK11	50	1,97	A B C D	TK44	310	12,20	TKK44	205	8,07	3/4	19,0
			KS-47	47	54	1,85	2,13	RR24RK12	50	1,97	A B C D	TK47	338	13,31	TKK47	218	8,58	3/4	19,0
2-1/4"	57,15	10-13	KS-49	49	56	1,93	2,20	RR24RK12	50	1,97	A B C D	TK49	338	13,31	TKK49	218	8,58	3/4	19,0
		14-16	KS-52	52	59	2,05	2,32	RR25RK13	50	1,97	A B C D	TK49	338	13,31	TKK49	218	8,58	3/4	19,0
2-1/2"	63,50	8-13	KS-54	54	62	2,13	2,44	RR26RK14	50	1,97	A B C D	TK54	375	14,76	TKK54	230	9,06	3/4	19,0
		12-16	KS-57	57	66	2,24	2,60	RR27RK15	50	1,97	A B C D	TK57	395	15,55	TKK57	235	9,25	3/4	19,0
2-3/4"	69,85	7-11	KS-60	60	69	2,36	2,72	RR28RK16	50	1,97	A B C D	TK57	395	15,55	TKK57	235	9,25	3/4	19,0
3"	76,20	7-8	KS-65	65	74	2,56	2,91	RR29RK17	50	1,97	A B C D	TK65	395	15,55	TKK65	235	9,25	3/4	19,0
		10-14	KS-68	68	78	2,68	3,07	RR30RK18	50	1,97	A B C D	TK72	425	16,73	TKK72	255	10,04	1	25,4
3-1/4"	82,55	7-11	KS-72	72	82	2,83	3,23	RR31RK19	50	1,97	A B C D	TK72	425	16,73	TKK72	255	10,04	1	25,4
		15-16	KS-77	77	87	3,03	3,43	RR32RK20	50	1,97	A B C D	TK77	425	16,73	TKK77	255	10,04	1	25,4
3-1/2"	88,90	10-13	KS-82	82	92	3,23	3,62	RR33RK21	50	1,97	A B C D	TK82	425	16,73	TKK82	255	10,04	1	25,4
3-3/4"	95,25	8-12	KS-86	86	96	3,39	3,78	RR34RK22	50	1,97	A B C D	TK86	425	16,73	TKK86	255	10,04	1	25,4
4"	101,60	9-12	KS-90	90	102	3,54	4,02	RR34RK22	50	1,97	A B C D	TK90	485	19,09	TKK90	275	10,83	1	25,4
		16	KS-96	96	108	3,78	4,25	RR35RK23	50	1,97	A B C D	TK96	485	19,09	TKK96	275	10,83	1	25,4

If you order expander KS-54 with rolls of 50 mm you should specify KS-5450, with 60 mm KS-5460, etc. Short mandrel set with shorter length on request.

PZ SERIES

Three expansion rolls, self feeding tube expanders. An excellent expander for re-rolling leaky tubes and for new constructions of water tube boilers, fire tube boilers, economizers and air heaters.

Expanders with 4, 5 and 7 rolls are available on request.

Our K70's right-angle rolling motors are recommended to be used with this expanders.



TUBE OD		TUBE GAUGE	TOOL NO.	EXPANSION RANGE				STDANDARD ROLLS			OTHER ROLL LENGTH PAGE C3	MANDREL			SHORT MANDRELL SET (3 PCS.)			SQUARE	
				[MM]		[INCH]		NO.	LENGHT			NO.	LENGTH		NO.	LENGTH			
[INCH]	[MM]	[BWG]		MIN	MAX	MIN	MAX			[MM]	[INCH]					[MM]	[INCH]		[MM]
1"	25,40	11-12	PZ-19	19	22	0,75	0,87	RR12	42	1,654	A	TK19	195	7,677	-	-	-	12,7	1/2
		13-16	PZ-20	20	23	0,79	0,93	RR12	42	1,654	A	TK20	208	8,189	-	-	-	12,7	1/2
1-1/8"	28,58	12-14	PZ-22	22	25	0,87	0,98	RR12	42	1,654	A	TK22	220	8,661	-	-	-	12,7	1/2
		14-16	PZ-23	23	26	0,91	1,02	RR13	42	1,564	A	TK23	220	8,661	-	-	-	12,7	1/2
		15-17	PZ-24	24	27	0,94	1,06	RR13	42	1,564	A	TK24	220	8,661	-	-	-	12,7	1/2
		16	PZ-25	25	28	0,98	1,14	RR13	42	1,654	A	TK25	220	8,661	-	-	-	12,7	1/2
		12-14	PZ-26	26	29	1,02	1,14	RR13	42	1,654	A	TK26	220	8,661	-	-	-	12,7	1/2
1-1/4"	31,75	12-17	PZ-27	27	30	1,06	1,18	RR15	42	1,654	A	TK27	220	8,661	-	-	-	12,7	1/2
		16	PZ-28	28	32	1,10	1,26	RR16	42	1,654	B C	TK28	285	11,220	-	-	-	19,0	3/4
		7-11	PZ-29	29	33	1,14	1,34	RR16	42	1,654	B C	TK29	285	11,220	-	-	-	19,0	3/4
1-1/2"	38,10	10-12	PZ-30	30	34	1,18	1,38	RR16	42	1,654	B C	TK30	285	11,220	-	-	-	19,0	3/4
		13-16	PZ-32	32	36	1,26	1,42	RR17	42	1,654	B C	TK32	260	10,236	-	-	-	19,0	3/4
		13-20	PZ-33	33	38	1,99	1,49	RP33	42	1,65	B C	TK33	290	11,41	TKK33	181,00	7,12	19,0	3/4
1-3/4"	44,45	8-9	PZ-35	35	41	1,38	1,61	RR21	42	1,654	B C	TK37	310	12,205	TKK37	188,00	7,402	19,0	3/4
		10-16	PZ-37	37	43	1,46	1,69	RR22	42	1,654	B C	TK37	310	12,205	TKK37	188,00	7,402	19,0	3/4
		12-18	PZ-39	39	45	1,53	1,77	RR40	42	1,654	B C	TK37	310	12,205	TKK37	188,00	7,402	19,0	3/4
2"	50,80	7-10	PZ-40	40	46	1,57	1,81	RR40	50	1,969	A B C D	TK42	310	12,205	TKK42	205,00	8,071	19,0	3/4
		11-12	PZ-42	42	48	1,65	1,89	RR23	50	1,969	A B C D	TK42	310	12,205	TKK42	205,00	8,071	19,0	3/4
		13-15	PZ-44	44	50	1,73	1,97	RR23	50	1,969	A B C D	TK44	310	12,205	TKK44	205,00	8,071	19,0	3/4
		16	PZ-47	47	54	1,85	2,13	RR24	50	1,969	A B C D	TK47	338	13,307	TKK47	218,00	8,583	19,0	3/4
2-1/4"	57,15	10-12	PZ-49	49	56	1,93	2,20	RR24	50	1,969	A B C D	TK49	338	13,307	TKK49	218,00	8,583	19,0	3/4
		14-16	PZ-52	52	59	2,05	2,32	RR25	50	1,969	A B C D	TK49	338	13,307	TKK49	218,00	8,583	19,0	3/4
2-1/2"	63,50	11-12	PZ-54	54	62	2,13	2,44	RR26	50	1,969	A B C D	TK54	375	14,764	TKK54	230,00	9,055	19,0	3/4
		13-16	PZ-57	57	66	2,24	2,60	RR27	50	1,969	A B C D	TK57	395	15,551	TKK57	235,00	9,252	19,0	3/4
2-3/4"	69,85	7-11	PZ-60	60	69	2,36	2,72	RR28	50	1,969	A B C D	TK57	395	15,551	TKK57	235,00	9,252	19,0	3/4
3"	76,20	7-11	PZ-65	65	74	2,56	2,91	RR29	50	1,969	A B C D	TK65	395	15,551	TKK65	235,00	9,252	19,0	3/4
		12-13	PZ-68	68	78	2,68	3,07	RR30	50	1,969	A B C D	TK72	425	16,732	TKK72	255,00	10,039	25,40	1
3-1/4"	82,55	7-12	PZ-72	72	82	2,83	3,23	RR31	50	1,969	A B C D	TK72	425	16,732	TKK72	255,00	10,039	25,40	1
		13-16	PZ-77	77	87	3,03	3,43	RR32	50	1,969	A B C D	TK77	425	16,732	TKK77	255,00	10,039	25,40	1
3-1/2"	88,90	10-16	PZ-82	82	92	3,23	3,62	RR33	50	1,969	A B C D	TK82	425	16,732	TKK82	255,00	10,039	25,40	1
3-3/4"	95,25	7-12	PZ-86	86	96	3,39	3,78	RR34	50	1,969	A B C D	TK86	425	16,732	TKK86	255,00	10,039	25,40	1
4"	101,60	8-12	PZ-90	90	102	3,54	4,02	RR34	50	1,969	A B C D	TK90	485	19,094	TKK90	275,00	10,827	25,40	1
		13-16	PZ-96	96	108	3,78	4,25	RR35	50	1,969	A B C D	TK96	485	19,094	TKK96	275,00	10,827	25,40	1

If you order expander PZ-54 with rolls of 50 mm you should specify PZ-5450, with 60 mm PZ-5460.

Short mandrel set with shorter length on request.

P2 SERIES

Three rolls, self feeding adjustable reach tube expander for deep reach expansion. Parallel rolling with long effective double radius rolls. Rolls are self retained in the cage. An excellent expander for use as touch-up expansion as well as a hard rolling and re-rolling a leaky tubes and for new constructions of water tube boilers, fire tube boilers, economizers, air heaters.

Expanders with 4, 5 rolls, with longer rolls or longer reach with 2 inch increments are available on request.

Our K70's right-angle rolling motors are recommended to be used with this expanders.



TUBE OD		TUBE GAUGE	TOOL NO.	EXPANSION RANGE				STANDARD ROLLS			MANDREL	SQUARE	
				[INCH]		[MM]		NO.	LENGHT			[INCH]	[MM]
[INCH]	[MM]	[BWG]		MIN	MAX	MIN	MAX			[MM]			
1-1/4"	31.7	16	P2-280	1.100	1.299	27.80	33.00	998	60	2,362	T-290	1/2"	12.7
1-1/2"	38.1	7-11	P2-290	1.140	1.330	28.80	34.00	1048	60	2,362	T-290	1/2"	12.7
		10-12	P2-300	1.173	1.337	29.80	35.00	1089	60	2,362	T-290	1/2"	12.7
		13-16	P2-320	1.251	1.456	31.80	37.00	1143	60	2,362	T-320	1/2"	12.7
1-3/4"	44.4	8-9	P2-350	1.370	1.614	34.80	41.00	RR21A	60	2,362	T-370	3/4"	19
		10-16	P2-370	1.448	1.692	36.80	43.00	RR22A	60	2,362	T-370	3/4"	19
2"	50.8	7-10	P2-400	1.566	1.811	39.80	46.00	RR40A	60	2,362	T-420	3/4"	19
		11-12	P2-420	1.645	1.889	41.80	48.00	RR23A	60	2,362	T-420	3/4"	19
		13-15	P2-440	1.724	1.968	43.80	50.00	RR23A	60	2,362	T-440	3/4"	19
		16	P2-470	1.842	2.125	46.80	54.00	RR24A	60	2,362	T-470	3/4"	19
2-1/4"	57.1	10-12	P2-490	1.921	2.204	48.80	56.00	RR24A	60	2,362	T-490	3/4"	19
		14-16	P2-520	2.039	2.332	51.80	59.00	RR25A	60	2,362	T-490	3/4"	19
2-1/2"	63.5	11-12	P2-540	2.118	2.440	53.80	62.00	RR26A	60	2,362	T-540	3/4"	19
		13-16	P2-570	2.236	2.598	56.80	66.00	RR27A	60	2,362	T-570	3/4"	19
2-3/4"	69.8	7-11	P2-600	2.354	2.716	59.80	69.00	RR28A	60	2,362	T-570	3/4"	19
3"	76.2	7-11	P2-650	2.551	2.952	64.80	74.00	RR29A	60	2,362	T-650	3/4"	19
		13-15	P2-680	2.669	3.070	67.80	78.00	RR30A	60	2,362	T-720	1"	25.4
3-1/4"	82.55	7-12	P2-720	2,834	3,228	72,00	82,00	RR31A	60	2,362	T-720	1"	25.4
		13-16	P2-770	3,030	3,430	77,00	87,00	RR32A	60	2,362	T-770	1"	25.4
3-1/2"	88.9	10-16	P2-820	3,228	3,622	82,00	92,00	RR33A	60	2,362	T-820	1"	25.4
3-3/4"	95.25	7-12	P2-860	3,385	3,779	86,00	96,00	RR34A	60	2,362	T-860	1"	25.4
4"	101.6	8-12	P2-900	3,543	4,015	90,00	102,00	RR34A	60	2,362	T-900	1"	25.4
		13-16	P2-960	3,779	4,409	96,00	108,00	RR35A	60	2,362	T-960	1"	25.4

Expanders P2 are also available with 80 mm rolls. Examples of order:

► P2-420 - regular expander with 60 mm rolls

► P2-420/80 - expander with 80 mm rolls

► P2-420/80+3" - expander with 80 mm rolls and extended length for 3"

FIRETUBE BOILER FLARING TUBE EXPANDERS

Three expansion rolls and three flare rolls, self feeding tube expanders with adjustable thrust collar for friction free operation and long tool life, as well as allow to adjust the flare length. This expander will simultaneously expand and flare the tube. Adjustable collar allows consistent flare length. An excellent expander for re-rolling a leaky tubes and for new constructions of water tube boilers, fire tube boilers, economizers, air heaters.

Expanders with 6 rolling rolls and 3 flare rolls are available on request.



TUBE OD		TUBE GAUGE	TOOL NO.	EXPANSION RANGE				ROLL SET NO.	MANDREL NO.	SHORT MANDREL SET	MANDREL SQUARE	
				[INCH]		[INCH]					[INCH]	[MM]
[INCH]	[MM]	[BWG]		MIN	MAX	MIN	MAX					
2"	50,8	10-14	FTKS-508	1,653	41,99	1,889	47,98	RR23RK11	TF-42	TFKK-42	3/4"	19
2-1/2"	63,5	10-14	FTKS-635	2,125	53,98	2,440	61,98	RR25RK14	TF-54	TFKK-54	3/4"	19
3"	76,2	10-14	FTKS-762	2,559	65,00	2,952	74,98	RR29RK17	TF-65	TFKK-65	3/4"	19

PARALLEL EXPANSION FIRETUBE EXPANDERS

Three rolls, self feeding tube expanders. Flip type thrust collar, accommodate tube sheets of 3/8" to 1" thick. An excellent expander for re-rolling a leaky tubes and for new constructions of water tube boilers, fire tube boilers, economizers, air Heaters.

Expanders with 4, 5 and 7 rolls are available on request.



TUBE OD		TUBE GAUGE	TOOL NO.	EXPANSION RANGE				ROLL SET NO.	MANDREL NO.	SHORT MANDREL SET	MANDREL SQUARE	
				[INCH]		[MM]					[INCH]	[MM]
[INCH]	[MM]	[BWG]		MIN	MAX	MIN	MAX					
2"	50,8	10-14	FTPZ-508	1,653	1,889	41,99	47,98	RR23	TK-42	TKK-42	3/4"	19
2-1/2"	63,5	10-14	FTPZ-635	2,125	2,440	53,98	61,98	RR25	TK-54	TKK-54	3/4"	19
3"	76,2	10-14	FTPZ-762	2,559	2,952	65,00	74,98	RR29	TK-65	TKK-65	3/4"	19

UNIVERSAL COMBINATION ROLLER BEADING

This tool is designed primarily for the fabrication and maintenance of Fire Tube Boilers with Tubes of 2"-3" OD. This self feeding, straight roll tool, is capable of simultaneously expanding and forming a uniform bead tight upon the tube sheet. For the best results we recommend a tube projection of 3/16" (5 mm).



TUBE OD		TUBE GAUGE	TOOL NO.	EXPANSION RANGE				ROLLS	BEADING ROLLS	FRONT PILOT	MANDREL	MANDREL SQUARE	
[INCH]	[MM]			[BWG]	[INCH]		[MM]					[INCH]	[MM]
2"	50,8	10	41633-00	1,700	1,907	43,2	48,4	R-42811	BR-41631-10	P-41701-10	M-42157	3/4"	19
		11	41633-00	1,700	1,907	43,2	48,4	R-42811	BR-41631-11	P-41701-11	M-42157	3/4"	19
		12	41633-00	1,700	1,907	43,2	48,4	R-42811	BR-41631-12	P-41701-12	M-42157	3/4"	19
		13	41633-00	1,700	1,907	43,2	48,4	R-42811	BR-41631-13	P-41701-13	M-42157	3/4"	19
2-1/2"	63,5	10	41634-00	2,200	2,460	55,9	62,6	R-41673	BR-41651-10	P-41702-10	M-42158	3/4"	19
		11	41634-00	2,200	2,460	55,9	62,6	R-41673	BR-41651-11	P-41702-11	M-42158	3/4"	19
		12	41634-00	2,200	2,460	55,9	62,6	R-41673	BR-41651-12	P-41702-12	M-42158	3/4"	19
		13	41634-00	2,200	2,460	55,9	62,6	R-41673	BR-41651-13	P-41702-13	M-42158	3/4"	19
3"	76,2	10	41359-00	2,700	2,890	68,6	75,7	R-41676	BR-41666-10	P-41703-10	M-42159	1"	25,4
		11	41359-00	2,700	2,890	68,6	75,7	R-41676	BR-41666-11	P-41703-11	M-42159	1"	25,4
		12	41359-00	2,700	2,890	68,6	75,7	R-41676	BR-41666-12	P-41703-12	M-42159	1"	25,4

COLINS EXPANDER

Non parallel self feeding boiler tube expanders from 1/2" to 4". Suitable for new erection or repair work that have thin tube sheet or just touch up a leaky joints. Recommended for tube sheets from 1/8" to 5/8" (3 mm to 16 mm).



TUBE OD		GAUGE	TUBE ID				TOOL NO.	EXPANSION RANGE				MANDREL NO.	ROLLS NO.	MANDREL SQUARE	
			[INCH]		[MM]			[INCH]		[MM]				[INCH]	[MM]
[INCH]	[MM]	[BWG]	MIN	MAX	MIN	MAX		MIN	MAX	MIN	MAX				
1/2"	12,70	16-17	0,370	0,384	9,40	9,76	CBTE-10	0,352	0,435	8,94	11,05	MS-22	RS-13	3/8"	9,52
		18-19	0,402	0,416	10,22	10,56	CBTE-11	0,382	0,465	9,70	11,81	MS-23	RS-13	3/8"	9,52
5/8"	15,88	14	0,459	0,459	11,65	11,65	CBTE-13	0,438	0,521	11,12	13,23	MS-24	RS-14	3/8"	9,52
		15-17	0,481	0,509	12,21	12,93	CBTE-15	0,462	0,566	11,73	14,37	MS-25	RS-15	3/8"	9,52
		18-19	0,527	0,541	13,39	13,73	CBTE-17	0,490	0,620	12,44	15,74	MS-26	RS-15	3/8"	9,52
3/4"	19,05	10	0,482	0,482	12,25	12,25	CBTE-15	0,462	0,566	11,73	14,37	MS-25	RS-15	3/8"	9,52
		11-12	0,510	0,532	12,95	13,51	CBTE-17	0,490	0,620	12,44	15,74	MS-26	RS-15	3/8"	9,52
		13-15	0,560	0,606	14,23	15,39	CBTE-19	0,538	0,688	13,66	17,47	MS-26	RS-16	3/8"	9,52
		16-17	0,620	0,634	15,75	16,11	CBTE-21	0,596	0,752	15,13	19,10	MS-27	RS-17	3/8"	9,52
		18-19	0,652	0,916	16,57	23,26	CBTE-22	0,620	0,776	15,75	19,71	MS-27	RS-18	3/8"	9,52
		11	0,635	0,635	16,12	16,12	CBTE-21	0,596	0,752	15,13	19,10	MS-27	RS-17	3/8"	9,52
7/8"	22,22	12	0,657	0,657	16,68	16,68	CBTE-22	0,620	0,776	15,75	19,71	MS-27	RS-18	3/8"	9,52
		13-14	0,685	0,709	17,40	18,00	CBTE-23	0,650	0,806	16,51	20,47	MS-27	RS-19	3/8"	9,52
		15-17	0,731	0,759	18,56	19,28	CBTE-24	0,710	0,866	18,03	21,99	MS-28	RS-19	1/2"	12,70
1"	25,40	9	0,704	0,704	17,88	17,88	CBTE-23	0,650	0,806	16,51	20,47	MS-27	RS-19	3/8"	9,52
		10-11	0,732	0,760	18,60	19,30	CBTE-24	0,710	0,866	18,03	21,99	MS-28	RS-19	1/2"	12,70
		12-13	0,782	0,810	19,86	20,58	CBTE-25	0,760	0,916	19,30	23,26	MS-28	RS-20	1/2"	12,70
		14-16	0,834	0,870	21,18	22,10	CBTE-26	0,812	0,968	20,62	24,58	MS-28	RS-21	1/2"	12,70
		17-18	0,884	0,902	22,46	22,92	CBTE-27	0,861	1,018	21,88	25,85	MS-28	RS-22	1/2"	12,70
1-1/8"	28,58	12	0,908	0,908	23,06	23,06	CBTE-27	0,862	1,018	21,89	25,85	MS-28	RS-22	1/2"	12,70
		13-17	0,937	1,008	23,80	25,60	CBTE-29	0,890	1,173	22,60	29,80	MS-29	RS-24	1/2"	12,70
1-1/4"	31,75	9-12	0,949	1,028	24,10	26,10	CBTE-29	0,890	1,173	22,60	29,80	MS-29	RS-24	1/2"	12,70
		13-16	1,058	1,118	26,88	28,40	CBTE-30	1,016	1,291	25,80	32,80	MS-29	RS-25	1/2"	12,70
1-3/8"	34,93	13	1,185	1,185	30,10	30,10	CBTE-31	1,150	1,398	29,20	35,50	MS-29	RS-26	1/2"	12,70
1-1/2"	38,10	11-12	1,260	1,280	32,00	32,50	CBTE-31	1,150	1,398	29,20	35,50	MS-29	RS-26	1/2"	12,70
	38,10	13-16	1,310	1,370	33,28	34,80	CBTE-32	1,274	1,524	32,35	38,70	MS-30	RS-26	3/4"	19,05
1-5/8"	41,28	11-13	1,385	1,435	35,17	36,45	CBTE-33	1,336	1,586	33,93	40,28	MS-30	RS-27	3/4"	19,05
1-3/4"	44,45	11-13	1,510	1,560	38,35	39,63	CBTE-36	1,462	1,712	37,13	43,48	MS-30	RS-28	3/4"	19,05
1-7/8"	47,63	11-13	1,635	1,685	41,52	42,80	CBTE-40	1,600	1,850	40,64	46,99	MS-31	RS-29	3/4"	19,05
2"	50,80	11-13	1,760	1,810	44,70	45,98	CBTE-44	1,724	1,974	43,78	50,14	MS-31	RS-30	3/4"	19,05
2-1/8"	53,98	11-13	1,885	1,935	47,87	49,15	CBTE-52	1,850	2,100	46,99	53,34	MS-31	RS-31	3/4"	19,05
2-1/4"	57,15	11-13	2,008	2,058	51,00	52,28	CBTE-56	1,980	2,230	50,28	56,64	MS-32	RS-31	1"	25,40
2-1/2"	63,50	11-13	2,260	2,310	57,40	58,68	CBTE-65	2,230	2,480	56,64	63,00	MS-32	RS-32	1"	25,40
2-3/4"	69,85	11-13	2,510	2,560	63,75	65,03	CBTE-66	2,480	2,730	63,00	69,35	MS-32	RS-33	1"	25,40
3"	76,20	10-13	2,732	2,810	69,40	71,38	CBTE-68	2,690	3,023	68,33	76,78	MS-33	RS-33	1"	25,40
3-1/4"	82,55	10-13	2,984	3,062	75,80	77,78	CBTE-70	2,940	3,273	74,67	83,13	MS-33	RS-34	1"	25,40
3-1/2"	88,90	10-13	3,232	3,310	82,10	84,08	CBTE-80	3,190	3,523	81,02	89,48	MS-33	RS-35	1"	25,40
3-3/4"	95,25	9-13	3,454	3,560	87,73	90,43	CBTE-84	3,412	3,745	86,66	95,12	MS-35	RS-34	1"	25,40
4"	101,60	9-13	3,704	3,810	94,08	96,78	CBTE-90	3,661	3,995	93,00	101,47	MS-35	RS-35	1"	25,40
4-1/2	114,30	9-13	4,204	4,310	106,78	109,48	CBTE-100	4,161	4,449	105,70	113,00	MS-35	RS-36	1"	25,40

K20 SERIES

K20 pneumatic rolling motor is designed for the fast and accurate torque controlled rolling of tubes from 1/4" – 1/2" OD (6.3 - 12.7 mm OD). This uniquely designed tool with automatic reverse, expands tubes to a preset torque, at which point it automatically trips over to its reverse rotation, backing itself out of the tube ready for the next expansion. The process is fast and effortless making it the ideal tool for production rolling applications. In line version is available on request.



	TUBE OD		FREE SPEED	MIN TORQUE		MAX TORQUE		WEIGHT		LENGTH		AIR USE		SQUARE	CHUCKS	
	[INCH]	[MM]	[RPM]	[IN.LBS]	[NM]	[IN.LBS]	[NM]	[LBS]	[KG]	[INCH]	[MM]	[CFM]	[L/MIN]		INC.	OPT.
K20-550	1/2"	12,7	550	0,166	0,226	6,25	8,47	2,64	1,2	8,62	219	17	480	3/8"	1/4"	3/8"
K20-1800	3/8"	9,5	1800	0,166	0,226	2,25	3,05	2,42	1,1	8,07	205	17	480	3/8"	1/4"	3/8"
K20-2500	1/4"	6,3	2500	0,166	0,226	0,66	0,9	2,29	1,1	8,07	205	17	480	3/8"	1/4"	3/8"

PUSH&PULL K50 SERIES

K50 series pneumatic motors has been specifically engineered to ensure uniform tube to tube sheet expansions, thereby preventing the under and over rolling of tubes. This pneumatic tool features an aluminum body, weighing in at only 10.5 lbs (4.76 Kgs) with an ergonomically correct push/pull throttle. Automatically stops tube expansion at defined settings.

**AK50 FULL AUTOMATIC ROLLING MOTOR**

AK50 tube rolling motor with automatic reverse. The machine automatically:

- ▶ start up when the expander is located in the tube;
- ▶ reverse the revolution to the left once determine the set up torque;
- ▶ stop when expender is withdrawn from the tube
- ▶ thanks to delay timer, machine automatically runs in forward direction after defined period from end of previous expansion ("NS" option)
- ▶ automatic tube expander lubrication ("L" option)

All the other features are the same as for standard K50 rolling motors.

	TUBE OD		FREE SPEED	MIN TORQUE		MAX TORQUE		WEIGHT		LENGTH		AIR USE		SQUARE	CHUCKS	
	[INCH]	[MM]	[RPM]	[IN.LBS]	[NM]	[IN.LBS]	[NM]	[LBS]	[KG]	[INCH]	[MM]	[CFM]	[L/MIN]		STD.	OPT.
K50-1250	3/4"	19	1250	14,00	1,58	108	12,20	10,5	4,76	12 1/4"	311	60	1700	3/8"	3/8"	1/2"
AUTO K50-1250	3/4"	19	1250	14,00	1,58	108	12,20	10,5	4,76	12 1/4"	311	60	1700	3/8"	3/8"	1/2"
K50-600	1"	25,4	485	22,00	2,49	193	21,81	10,5	4,76	12 1/4"	311	60	1700	3/8"	3/8"	1/2"
AUTO K50-600	1"	25,4	485	22,00	2,49	193	21,81	10,5	4,76	12 1/4"	311	60	1700	3/8"	3/8"	1/2"
K50-400	1 1/4"	31,7	400	44,15	5,00	318	36,00	10,5	4,76	12 1/4"	311	60	1700	3/8"	3/8"	1/2"
AUTO K50-400	1 1/4"	31,7	400	44,15	5,00	318	36,00	10,5	4,76	12 1/4"	311	60	1700	3/8"	3/8"	1/2"

K60 SERIES

K60 rolling motors control expansion by the accurate measurement of torque. They automatically stop expanding according to a predetermined setting. Torque control prevents over- and under-expansion of tubes, assures uniformly tightened tube joints, and provides maximum holding strength for individual tubes. All K60 motors include torque sensing cams designed and manufactured specifically for tube expanding applications.

- 】 Strong, lightweight aluminum housings for easier handling and less operator fatigue
- 】 Rugged drive combines precision control and measured torque output
- 】 Simple dial-a-torque adjustment collar for easy set up
- 】 Cushioned shut-off reduces torque reaction
- 】 Quick change chucks to improve productivity

AK60NS FULL AUTOMATIC ROLLING MOTOR

AK60NS is a tube rolling motor with the fully automatic reverse system. The machine automatically:

- 】 startup rotating in the forward direction;
- 】 reverse the revolution to the left once determine the setup torque;
- 】 thanks to adjustable delay timer, the machine automatically runs in forwarding direction after a defined period from the end of a previous expansion;
- 】 automatic tube expander lubrication "L" is available optionally.

All the other features are the same as for standard K60 rolling motors.




	TUBE OD		FREE SPEED	MIN TORQUE		MAX TORQUE		WEIGHT		LENGTH		AIR USE		SQUARE	CHUCKS	
	[INCH]	[MM]	[RPM]	[IN.LBS]	[NM]	[IN.LBS]	[NM]	[LBS]	[KG]	[INCH]	[MM]	[CFM]	[L/MIN]		STD.	OPT.
AK60NS-1200	1"	25,4	1200	3,8	5,0	19,0	25,0	27	12,25	18	457	1980	70	1/2"	3/8, 1/2	3/4, 1
AK60NS-900	1-1/2"	38,1	756	4,7	6,4	30,7	41,6	27	12,25	18	457	1980	70	1/2"	3/8, 1/2	3/4, 1
AK60NS-400	2"	50,8	400	10,0	12,8	61,0	82,5	27	12,25	18	457	1980	70	3/4"	3/4, 1	3/8, 1/2

K60 & AUTO K60 ON SITE



Auto K60 fastened on the Flexpander.

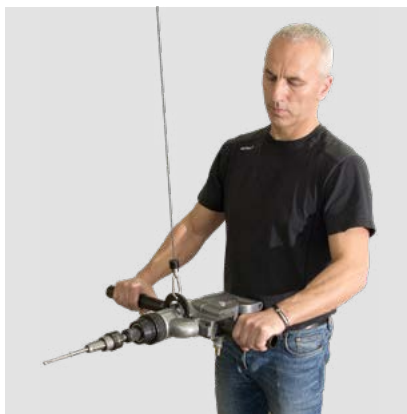

K60 fastened on the rope balancer.

K70 RIGHT ANGLE SERIES

K70 Torque Controlled Rolling Motors have been designed for the Boiler Tube Industry. Tools have a unique head design which features a fully enclosed bearing design for long and trouble free life.

With industry input, our tools have been specifically engineered to precisely and consistently expand tubes in Steam / Mud Drums, Fire Tube and related Boilers and Equipment.

All models are equipped with a roll throttle as standard, a lever throttle is optional.

K70 WITH OPTIONAL ACCESSORIES



Right angle gear drive



Parallel gear drive




Single universal joint

	TUBE OD		FREE SPEED	MIN TORQUE		MAX TORQUE		WEIGHT		LENGTH		HEIGHT WITHOUT SQUARE DRIVE		SIDE TO CENTER		SQUARE	CHUCK	
	[MM]	[INCH]	[RPM]	[NM]	[FT.LBS]	[NM]	[FT.LBS]	[KG]	[LBS]	[MM]	[INCH]	[MM]	[INCH]	[MM]	[INCH]		INC.	OPT.
K72-RT-90	101,6	4"	90	200	150	410	305	6,7	14,75	550	21,7	70	2,75	37	1,5	3/4"	1", 3/4"	-
K72-LT-90	101,6	4"	90	200	150	410	305	6,7	14,75	550	21,7	70	2,75	37	1,5	3/4"	1", 3/4"	-
K73-RT-190	63,5	2,5"	190	95	70	200	140	5,8	13,00	530	20,1	65	2,60	28	1,1	3/4"	3/4"	1/2"
K73-LT-190	63,5	2,5"	190	95	70	200	140	5,8	13,00	530	20,1	65	2,60	28	1,1	3/4"	3/4"	1/2"
K73-RT-280	57,1	2,25"	280	60	44	140	104	5,8	13,00	530	20,1	65	2,60	28	1,1	3/4"	3/4"	1/2"
K73-LT-280	57,1	2,25"	280	60	44	140	104	5,8	13,00	530	20,1	65	2,60	28	1,1	3/4"	3/4"	1/2"
K73-RT-375	50,8	2"	375	40	30	110	82	5,8	13,00	530	20,1	65	2,60	28	1,1	3/4"	3/4"	1/2"
K73-LT-375	50,8	2"	375	40	30	110	82	5,8	13,00	530	20,1	65	2,60	28	1,1	3/4"	3/4"	1/2"
K75-RT-30	152,0	6"	30	120	90	1230	922	7,5	16,50	620	24,0	70	2,75	37	1,5	1"	1"	1-1/4"
K75-LT-30	152,0	6"	30	120	90	1230	922	7,5	16,50	620	24,0	70	2,75	37	1,5	1"	1"	1-1/4"
K75-RT-60	127,0	5"	60	60	45	640	480	6,5	14,3	620	24,0	70	2,75	37	1,5	1"	1"	1-1/4"
K75-LT-60	127,0	5"	60	60	45	640	480	6,5	14,3	620	24,0	70	2,75	37	1,5	1"	1"	1-1/4"

LT - lever throttle; RT - roll throttle

K77 RIGHT ANGLE SERIES

Our torque controlled pneumatic rolling motor suitable for expanding tube up to 8" and refinery fittings.

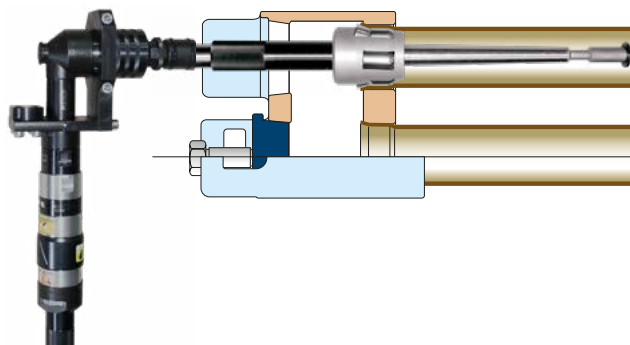

	TUBE OD		FREE SPEED	MIN TORQUE		MAX TORQUE		WEIGHT		LENGTH		HEIGHT WITHOUT SQUARE DRIVE		SIDE TO CENTER		SQUARE	CHUCK	
	[MM]	[INCH]	[RPM]	[NM]	[FT.LBS]	[NM]	[FT.LBS]	[KG]	[LBS]	[MM]	[INCH]	[MM]	[INCH]	[MM]	[INCH]		INC.	OPT.
K77-RT-25	203,2	8"	25	710	532	1455	1075	10	14,75	552	21,73	190	4,826	39	1,535	1"	1", 1-1/4"	1-1/2"
K77-LT-25	203,2	8"	25	710	532	1455	1075	10	14,75	552	21,73	190	4,826	39	1,535	1"	1", 1-1/4"	1-1/2"
K77-RT-8	203,2	8"	8	315	232	4300	3172	15	14,75	552	21,73	190	4,826	39	1,535	1"	1", 1-1/4"	1-1/2"
K77-LT-8	203,2	8"	8	315	232	4300	3172	15	14,75	552	21,73	190	4,826	39	1,535	1"	1", 1-1/4"	1-1/2"

LT - lever throttle; RT - roll throttle

MULTIPLEXPAND AP-S2

Two spindle, air driven torque control tube expansion system with adjustable tube pitch. Designed for all type of coolers that suit to the motor torque capacity. One air lever valve activates all motors and the whole expanding process goes automatically and independently on every motor.

STANDARD FEATURES

- Up to twice performance
- 2 spindles working simultaneously but independently
- Working range covers tubes from 1/4" up to 1/2" (5/8"*)
- Adjustable tube pitch 51 - 90 mm (2"- 3,54")
- **Spindle with reverse compensation feature in case of non simultaneous return**
- Precise torque control tube rolling with automatic reverse
- Commonality of parts with other K20 rolling motors

* varies depending on tube material , gauge and tube sheet thickness

ADJUSTABLE TUBE PITCH



AVAILABLE MOTORS



The L20 rolling motors is based on K20 rolling motors and the all parts are interchangeable.



ME-AP-L1800-S2

	TUBE OD		FREE SPEED	MIN TORQUE		MAX TORQUE		WEIGHT		LENGTH		AIR USE		CHUCKS	
	[INCH]	[MM]		[FT.LBS]	[NM]	[FT.LBS]	[NM]	[LBS]	[KG]	[INCH]	[MM]	[CFM]	[L/MIN]	STD.	OPT.
L20-550	1/2	12,70	550	0,166	0,225	6,25	8,474	2,64	1,20	9,409	239,0	17	480	1/4	3/8
L20-1800	3/8	9,53	1800	0,166	0,225	2,25	3,051	2,42	1,10	8,858	225,0	17	480	1/4	3/8
L20-2500	1/4	6,35	2500	0,166	0,225	0,66	0,895	2,29	1,04	8,858	225,0	17	480	1/4	3/8
L30-1000	3/4	19,05	1000	1,180	1,580	11,20	15,5	11,0	4,95	13,700	350,0	60	1700	3/8	1/2"

* Tube capacity for most popular cases with a standard percentage of the wall reduction. The reached capacity can be different for thicker tube sheet, harder and exotic metal tube and a higher percentage of wall reduction.

EXAMPLE APPLICATION



MULTIPLEEXPAND NAP-S4

Four spindle*, air driven torque control tube expansion system with non adjustable tube pitch. Designed for all type of coolers that suit to the motor torque capacity. One air lever valve activates all motors and the whole expanding process goes automatically and independently on every motor.

STANDARD FEATURES


- Up to four** times performance
 - 4 spindles working simultaneously
 - Working range covers tubes from 1/4" up to 1/2" (5/8"***)
 - Fixed tube pitch
 - **Spindle with reverse compensation feature in case of not simultaneous return**
 - Precise torque control tube rolling with automatic reverse
 - Commonality of parts with other K20 rolling motors
- Available with other number of spindles - on request.

* can be less or more spindle
** depend number of working spindles
*** varies depending on tube material , gauge and tube sheet thickness

AVAILABLE MOTORS



The L20 rolling motors is based on K20 rolling motors and the all parts are interchangeable.

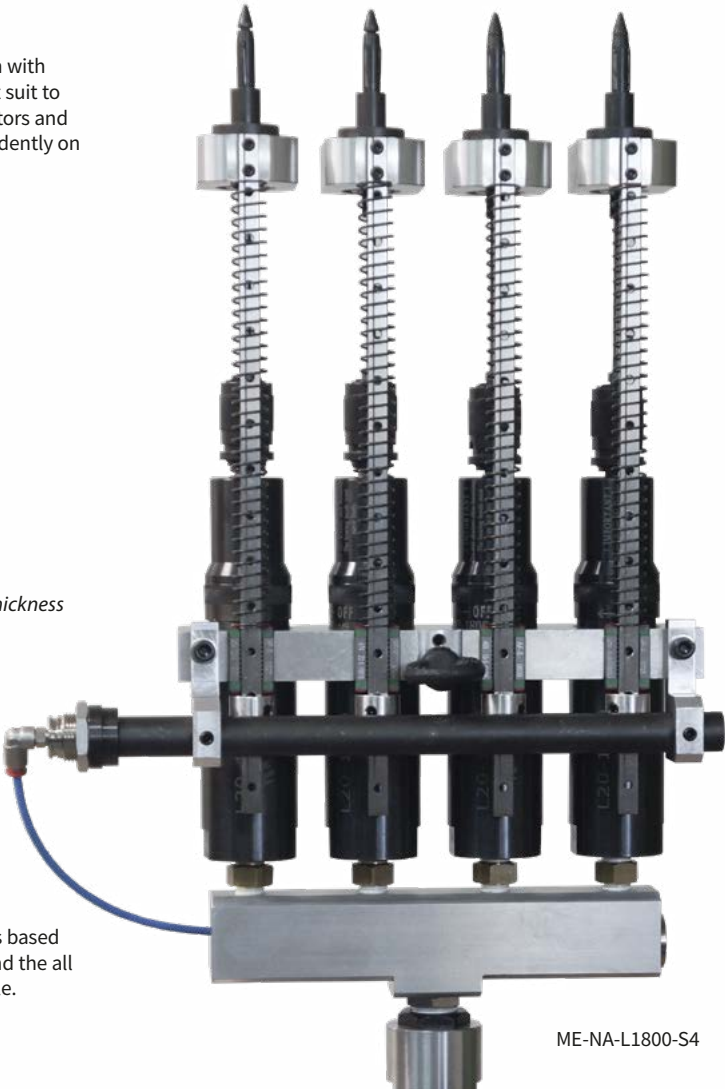

ME-NA-L1800-S4

	TUBE OD		FREE SPEED	MIN TORQUE		MAX TORQUE		WEIGHT		LENGTH		AIR USE		CHUCKS	
	INCH	MM	RPM	FT.LBS	NM	FT.LBS	NM	LBS	KG	INCH	MM	CFM	L/MIN	STD.	OPT
L20-550	1/2	12,70	550	0,166	0,225	6,25	8,474	2,64	1,20	9,409	239,0	17	480	1/4	3/8
L20-1800	3/8	9,53	1800	0,166	0,225	2,25	3,051	2,42	1,10	8,858	225,0	17	480	1/4	3/8
L20-2500	1/4	6,35	2500	0,166	0,225	0,66	0,895	2,29	1,04	8,858	225,0	17	480	1/4	3/8

* Tube capacity for most popular cases with a standard percentage of the wall reduction. The reached capacity can be different for thicker tube sheet, harder and exotic metal tube and a higher percentage of wall reduction.

EXAMPLE APPLICATIONS



FLEXHOLDER SYSTEM

The FLEXHolder articulated arm supports the weight and absorbs the torque of the rolling motors and beveling machines using a pneumatic counterbalance, which allows the operator to effortlessly move the rolling motor into position.

- Positive tool holding system virtually eliminates the chance for operator error.
 - Increases expander life up to three times compared to conventional tube rolling.
 - Extends tool life by using the lubricated air from rolling motor's exhaust for cooling the rolls & mandrels, significantly reducing tooling cost.
- Standard model features 1,5 m vertical and 1,5 m horizontal reach (models with increased vertical and horizontal capacity are available upon request). Column can be easily removed from the base for the transportation purposes.

SPECIFICATION

Vertical movement	150 cm	59"
Horizontal movement	150 cm	59"
Minimum Lift Capacity	5 kg	10 Lbs
Lift Capacity	30 kg	37 Lbs
Allowable Torque	170 Nm	125 FtLbs



CONVENIENT WORKPLACE



The FLEXHolder truck has a built-in compartment. Large capacity allows you to maintain order in the workplace.



FLEXHolder can be supplied as a column, without trolley, which can be fixed to the floor, your own trolley or any other preferred way.

SUPPORT FOR WHOLE RANGE OF KRAIS MOTORS



Auto K50 Series rolling motors



EB-1 Rolling Motors operated by TES100



E-1 Rolling Motors operated by TES100



S1-S5 Servo Motors (synchronous) operated by TES1000



B1-B5 Servo Motors (synchronous) operated by TES1000

TES MINI 2

TES Mini 2 is a semi automatic torque controller for the precise expansion of ferrous, non-ferrous and alloy tubing. It is ideal for condenser/chillers, heat exchangers and boilers. It's one of most popular tools because of its accuracy, speed and ease of use. The second generation TES Mini has been designed with direct input from our customers and utilizes the latest electronic components. As a direct result of these new technologies, gains in precision and energy efficiency have been realized from an already accurate system ($\pm 1\%$). The redesigned control panel is simpler to navigate and incorporates a built in card reader for detailed work reports.

MAIN TES MINI 2 FEATURES


- 】 microprocessor controlled tube expansion;
- 】 consistent torque control over 1 or 10,000 expansions;
- 】 controls torque during long series of tube expanding;
- 】 programmable torque shut-off value and high/low torque limits;
- 】 reverse button for retracting expanders from the tubes;
- 】 programmable timers for; cycle start, reverse pause, end of cycle, and a suppression timer for low torque value settings;
- 】 CE Certified design.

Usage of our TES Mini 2 Controller, which is durable and easy to maintain, ensures that all tubes are expanded to the same torque. With the proper, easy to use set up, you can avoid over rolling which damages joint integrity and the distortion of tube sheet ligaments.

TES MINI 2 FUNCTIONS


- 】 speed adjustment or limit (depends on motor type)
- 】 torque adjustment
- 】 suppression time adjustments
- 】 pause time adjustments
- 】 softstart delay
- 】 report generation (up to 9999 cycles)
- 】 works with 110 V and 230 V

DIMENSIONS

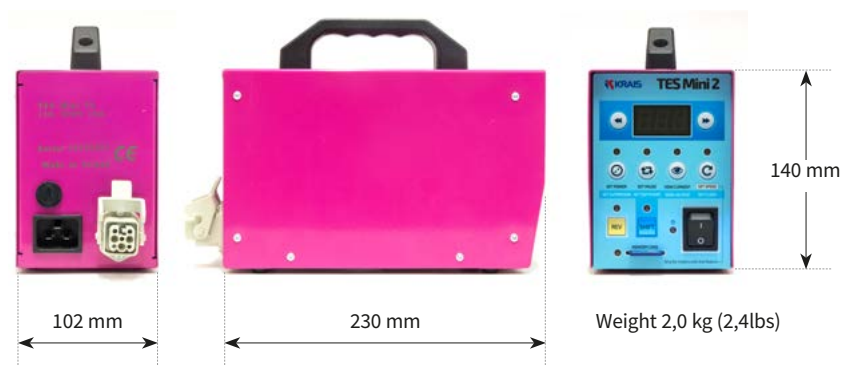

TES MINI 2 MOTORS

TES Mini in conjunction with one of our tube rolling motors will improve productivity and safety, while delivering unmatched performance and durability.

DRIVE		TUBE OD		FREE SPEED	MAX RPM UNDER LOAD	MOTOR POWER	TORQUE				WEIGHT	
							[NM]		[FT-LBS]			
		MIN	MAX				MIN	MAX	MIN	MAX	[KG]	[LBS]
	HT-0	1/4	1/2	2300	1700	460 W	0,70	10,00	0,50	7,40	1,2	2,4
	ES-0	5/8	1 1/4	680	450	1150 W	12,00	45,00	8,85	33,00	3,2	7,0
	ES-2	5/8	1 1/8	650 1200	430 760	1150 W	8,00	43,00	6,00	32,00	3,2	7,0
	DU-0	5/8	1	628 2100	450 1550	650 W	3,00	42,00	2,21	30,50	2,0	4,4
	DU-1	3/4	2	150 250 445 720	120 219 380 650	2000 W	12,00	250,00	8,85	185,00	8,6	17,6
	K90-E-90	2	5	90	81	1150 W	70,00	510,00	51,63	376,16	10,0	22,0
	K90-E-190	1 1/2	3	142	129	1150 W	50,00	260,00	36,88	191,77	10,0	22,0
	K90-E-280	1 1/4	2 1/2	274	250	1150 W	40,00	190,00	29,50	140,14	10,0	22,0

* Tube Capacity depends on material and technical condition of tube

TES-3000

This Digital Tube Expanding System features a range of powerful and efficient servo motors. Variable Speed and Torque repeatability $\pm 1\%$ are a few of the advantages of this system. Created for the demanding customer, this system ensures uniform tube expansion over a wide range of tube diameters and materials, greater efficiency and accuracy combined with ease of use make this system, simple, affordable and extremely fast.

BASIC PARAMETERS

- ▶ Power supply:
- ▶ TES 3000: 400V 50/60Hz
- ▶ For tubes: $\frac{1}{2}$ " – $1\frac{1}{2}$ "
- ▶ Control unit weight: 14 kg
- ▶ Footswitch weight: 5 kg
- ▶ Dimensions: 800 x 200 x 900 mm



MAIN TES FEATURES

- ▶ Purely digital and modular system.
- ▶ High tech servo drive and motor assure accuracy, high quality and repeatability of the results and efficient work.
- ▶ Extremely easy and user friendly interface on 7" touch screen.
- ▶ Supported languages: English, Korean, German, Spanish, Portuguese, Chinese, Polish.
- ▶ USB Flash Drive available to dump expanding log files (48 MB of internal storage space for the log files)
- ▶ Easy software upgrade with USB flash memory
- ▶ CE compliant. In full accordance with RoHS compliance.
- ▶ Motor equipped with EnDat encoder.

TES-3000 SPECIFICATION

Colors	65536
Resolution (W x H)	800 x 480
Back Light	LED
Processor	Cortex A8 600MHz
Touch Panel Type	4 wires resistive type
Storage	128 MB Flash
RAM	128 MB
USB Host	USB 2.0 – software updates, dump the log files
CE	Complies with EN 55022:2006, Class A, EN 61000-3-2:2006, EN 61000-3-3:1995 + A1:2001 + A2:2005 standards
UL	E248297
Protection Structure	IP65 front panel
Storage Temperature	-20°-60°C (-4°-140°F)
Operating Temperature	0°-50°C (32°-122°F)
Operation Humidity	10-90% RH (non-condense)



Special designed body shape for convenient of operator




USB host for easy software upgrade to latest version.



TES units are equipped with top quality connectors.

SERVO DRIVE WORKING SCHEME

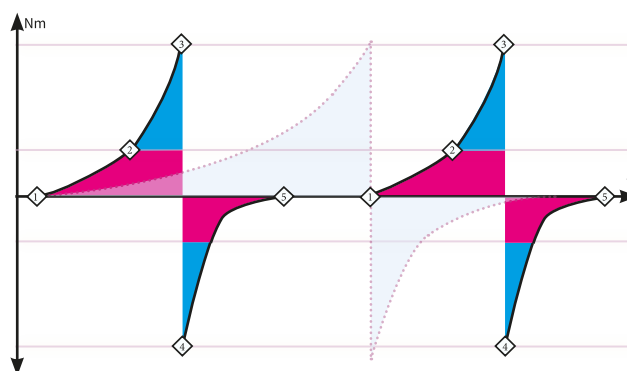

■ High speed; ■ Variable speed; ■ Constant speed
— Servo drive rolling; Traditional rolling

TES3000 AND B2 SERVO DRIVE



MOTORS FOR TES-3000

We offer a full range of motors, you can choose a proper one that fits your needs. Each motor is equipped with one of 5 of the gear boxes. Each with protection level IP56.

DRIVE		PHASE VOLTAGE	WEIGHT	MAX RPM	TORQUE (WITH TES-3000)			
					NM		FT.LB	
					MIN	MAX	MIN	MAX
	S3000	3/400V	5,0 kg	3000	0,2	2,5	0,10	1,80
	S6000	3/400V	5,0 kg	6000	0,2	2,5	0,10	1,80
	S5	3/400V	5,0 kg	1662	2,3	8,6	1,60	6,30
	S4	3/400V	5,0 kg	1500	2,7	9,5	1,90	7,00
	S3	3/400V	5,0 kg	1091	3,0	13,0	2,20	9,50
	S2	3/400V	5,0 kg	800	2,8	18,0	2,00	13,20
	S1	3/400V	5,0 kg	600	3,0	24,0	2,20	17,70
	S1-RA	3/400V	6,5 kg	320	2,2	45,0	1,62	33,0
	S2-RA	3/400V	6,5 kg	425	1,7	33,0	1,25	24,0
	S3-RA	3/400V	6,5 kg	580	1,1	24,0	0,81	17,0
	S4-RA	3/400V	6,2 kg	797	0,9	17,0	0,66	12,0
	s5-RA	3/400V	6,2 kg	884	0,7	16,0	0,51	11,0
	B5	3/400V	8,0 kg	1453	1,8	27,0	1,30	19,90
	B4	3/400V	8,0 kg	1000	2,6	39,0	1,90	28,70
	B3	3/400V	8,0 kg	736	3,5	53,0	2,50	39,00
	B2	3/400V	8,0 kg	400	6,5	92,5	4,70	68,20
	B1	3/400V	8,0 kg	300	9,0	123,0	6,60	90,70
	G1455	3/400V	9,0 kg	1453	2,3	70	1,6	51,6
	G1000	3/400V	9,0 kg	1000	3,4	102	2,5	75,2
	G400	3/400V	9,5 kg	400	7,5	240	5,5	177

MOTOR WHICH “FITS EVERYWHERE”

KRAIS Sx-RA is the series of compact, high customisable servo-controlled tube rolling motors.

The compact body, with a pistol grip, right-angle rolling motors are excellent for use in tight and hard to reach places with standard rolling motors. An especially places like tube sheet placed deep in the shell/partition or a condenser in desalination plant with tube sheet opposite to the wall.

Like all KRAIS servo motors – this unit assures differences less than 1% in repeatability of torque control. The convenient pistol grip can be position in 3 ways to suit the application and operator preferences. The pistol grip – for a better control – works as the hand switch with two triggers: for manual operation and emergency button. The machine is equipped with suspension for balancer.



MANY CUSTOM CONFIGURATIONS

Pistol grip at left side



Pistol grip at back



Pistol grip at right side



Pistol grip at left side with handle on bottom



Pistol grip at back with handle on bottom




Pistol grip at back side with handle on left



... plus many more, which can fit in all tough locations!

TELESCOPIC SHAFT

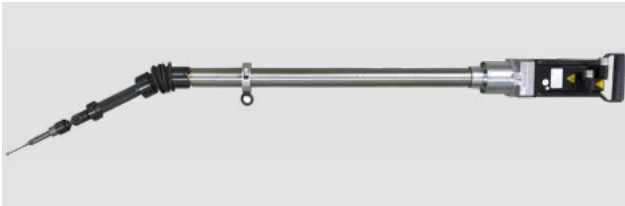



Optional telescopic shaft for motors G-1000, G-400 and G-1450

FLEXHOLDER

To work with TES3000 controllers we recommend arm FlexHolder. This connection allows you to create a mobile workstation with an above average performance!



TES-3000 SOFTWARE



- › Friendly interface and large touch screen allows to configure different motor types with their predefined min/max values and to set up required expanding parameters.
- › Torque Wizard helps to calculate torque settings based on: %wl reduct, Feed Angle, Mandrel taper, Tube Diameter, Tube Yield (Ultimate tensile strength), Wall Thickness (Gauge, Expansion Length)
- › 3 operating modes available: MANUAL: Single expansion, SEMIAUTO: Single expansion with autorevers, AUTO: Expansion with autorevers in endless loop until operator stops
- › Configurable expanding timers: reverse rolling time, time between expanding cycles (to move expander from one to another tube), time to expand with maximum rpm in the initial expanding phase
- › Other features: Expanding counter, Color status lamps, Metric and imperial units available, Translated to many languages.



TES-3000 DUO

The new KRAIS digital tube rolling system TES3000-DUO is built upon the basis of the TES3000 digital system and allows for a double increase in work efficiency by the simplest solution: simultaneous rolling of two tubes.

TES3000-Duo is a digital controller adapted to independent control of two selected servo motors mounted in the adjustable plate to suit various hole spacing in the tube sheet.

The system offers all the advantages of the regular TES3000: variable speed control and precise torque control with repeatability close to 1% in the DUO version for two simultaneous tube expansions.

TES3000-DUO has two synchronized axes but with independent torque control on each motor.

They both start tube expanding in the same time and then regardless which one finish the expansion first, it is waiting for the second one to finish and both returns at the same time to avoid tensioning of the entire system due to an unequal return.

The solution is addressed to the most demanding customers: it guarantees reproducibility of tube expansion at the large series, high quality of the expansion and multiplied efficiency compared to traditional methods of rolling out.

MAIN TES3000 DUO FEATURES

- Two-channel main unit controlling the operation of two motors independently.
- Two high tech servo drives assure accuracy, and repeatability of the results and efficient high-quality work.
- Independent, precise torque control for both rolling drives for proper expansion
- Anti-tension simultaneous revers of both expanders (finishing drive is always waiting for second one)
- Easy, user-friendly software on 7" touch screen.

BASIC PARAMETERS

- For tubes: 1/2" – 1 1/2"
- Power supply: 400V 50/60Hz
- Control unit weight: 14 kg + drives
- Footswitch weight: 5 kg



Special designed body shape for convenient of operator



USB host for easy software upgrade to latest version.



TES units are equipped with top quality connectors.

MOTORS FOR TES-3000 DUO

The whole series of drives is adapted to work in the DUO set – you can choose a proper one that fits your needs. Each motor is equipped with one of 5 of the gear boxes. Each with protection level IP56.


DRIVE	PHASE VOLTAGE	WEIGHT	MAX RPM	TORQUE (WITH TES-3000)			
				NM		FT.LB	
				MIN	MAX	MIN	MAX
S3000	1/230V	5,0 kg	3000	0,2	2,5	0,10	1,80
S6000		5,0 kg	6000	0,2	2,5	0,10	1,80
S5		5,0 kg	1662	2,3	8,6	1,60	6,30
S4		5,0 kg	1500	2,7	9,5	1,90	7,00
S3		5,0 kg	1091	3,0	13,0	2,20	9,50
S2		5,0 kg	800	2,8	18,0	2,00	13,20
S1		5,0 kg	600	3,0	24,0	2,20	17,70
G1455	3/400V	9,0 kg	1453	2,3	70	1,6	51,6
G1000		9,0 kg	1000	3,4	102	2,5	75,2
G400		9,5 kg	400	7,5	240	5,5	177

TES-3000 SOFTWARE



TES3000 friendly software allows to easily configuration motor types and set-up all parameter values required for best quality expanding.

TES3000 AND G1450 SERVO DRIVE

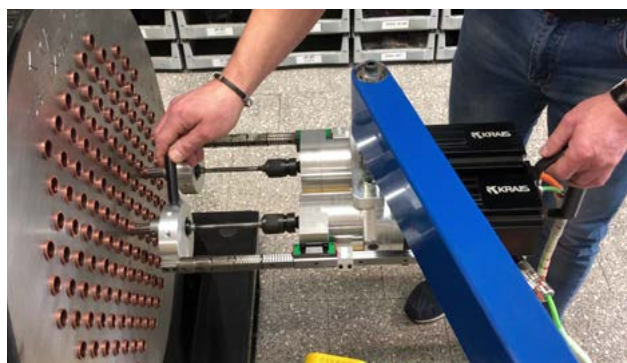

SWIFTROLL X1

Fully automatic Robot-Setup for tube expansion, facing, tube cutting and orbital tube to tube sheet welding.

Based on 6 axis FANUC robot, a special version of TES3000 for CNC – digital controller for speed and expansion managing and KRAIS dual function, dual-g geared, 3 KW servo drive. All works under Fanuc R30iB system. SwiftRoll has an overload system in the event of a collision to prevent damages.

SwiftRoll X1 is delivered with built-in HMI software and PC laptop with custom CAM software for easy tube sheet programming. SwiftRoll X1 is installed on the convenient steel platform.

As optional we can furnish the robot with: automatic referencing function, vision system and force sensors allow robots to detect force and torque. SwiftRoll can be built with a bigger robot that provides double capacity: bigger reach radius and lifting.



WORKING RANGE			STANDARD MOTOR PARAMETERS			
AXIS NUMBER	REACH RADIUS	LIFTING	ROLLING SPEED	ROLLING TORQUE	FACING SPEED	POWER
6	1200 mm	20 Kg	Up to 1000 Rpm	102 Nm	Up to 1000 Rpm	3 kW
	47,00"	44 Lbs		75 Ft.Lbs		

TES3000 - SEPARATE UNIT



The TES3000 for CNC can also be used as the independent rolling system. Can be used with FlexHolder, telescopic shaft or handheld. And, thanks to the wide range of motor drives, TES3000 for CNC can be used to process expansion of tubes in varies sizes and materials.

R3000 - NEW DRIVE




Newest range of motors for tube rolling and facing in one. Torque range from 0,5 Nm to 50 Nm and speed from 200 to 3000 Rpm (depends on application).

SWIFTROLL XS



SwiftRoll Xs the smaller version of the SwiftRoll X1. Designed for small cooler manufacturers. With this version, the tube facing is not available. Available motors up to 6000 rpm.


CUSTOM HMI SOFTWARE

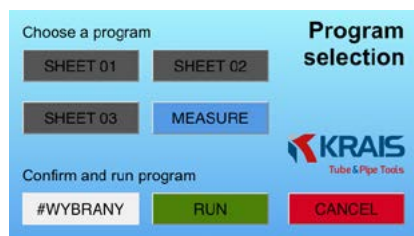

The robot is delivered with the pre-installed KRAIS HMI system dedicated exclusively to support of referencing, tube expanding, tube facing and welding tubes to tube sheet. The system has been written to facilitate the operation of the robot and to hide functions that may be unnecessary in the working process or are too advanced at the very beginning of learning.

CUSTOM CAM FOR EASY PROGRAMMING

Unique feature delivered as standard is full featured, customized CAM software. In a very short period of time allows creating programs for tube expanding, facing or welding to tube sheet. Software functions allow measuring all tube sheet parameters based on sheet drawing. The precise definition of tube holes locations is determined in few clicks. Calibration, made by robot's header, joins information from drawing with the real sitting of the tube sheet. The whole process takes minutes. One of the essential functions of software is a possibility to automatically programming the order of expanding tubes. It is very important to avoid tube sheet deformation while expanding from the top to the bottom or another way around.

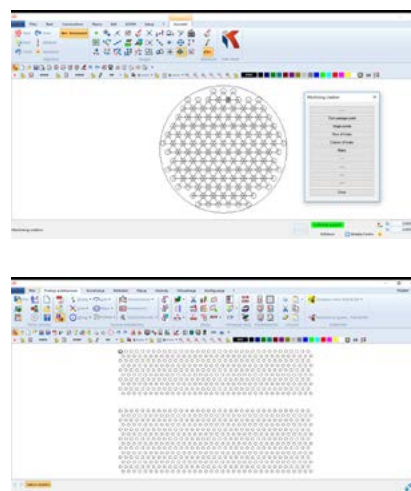


TIPTIG WELDING UNIT



SwiftRoll as an option can be integrated with a tube to tube sheet welding equipment as cooperation with the most modern, most sophisticated and fastest welding system available these days - made by company TipTig.



SWIFTROLL IN ACTION

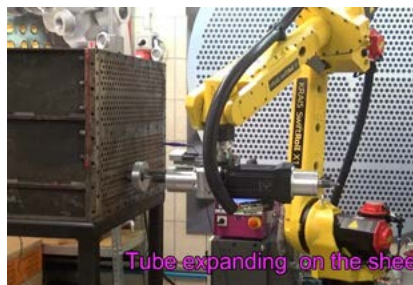

Simultaneous machining of two (!) tube sheets. Both of them were prepared earlier and now they need tube facing and expanding. After on hour setup, all work is done totally automatically.

TEF – TUBE END FACER



Typical application for TEF is the tube trimming of heat exchanger, condenser and chiller tubes to a uniform 1/8" (3 mm) tube projection after tube rolling. This will fit into all electric and pneumatic power tools equipped with a 1/2" Jacobs chuck. The tool is fitted with a three slot collar for precision adjustment and features a very simple mechanism for tool bit replacement. TEF is equipped with a hex shank as standard.

Work best with KDM - Krais Drilling Machine.



TOOL FOR SERRATING TUBE SHEET



Portable, self-centering tool for grooving tube sheet. Unique single-piece mandrel with built-in rollers in the part that operates directly in the hole allows obtaining a perfect surface, free from burrs and flashes. The latter was formed with the previous designs during the friction of the mandrel against the walls of the hole - now, it is eliminated through the use of rollers - the mandrel rolls over the walls of the hole. Owing to the lack of friction the life of the tool has grown very significantly. As an option, the tool can be delivered with a special channel conducted inside the mandrel. Channel serving the purpose of feeding the cooling medium directly through the tool cutter, this having an enormous impact on the life of the cutter and helping in rinsing out chips during the work.

Grooving tools can be used both on portable and stationary multiradial drills. They also find their application on CNC machine tools.

JGS grooving tools are manufactured within a broad range of sizing: from 3/8" (9.52 mm) up to 4" (101.6 mm), in both imperial and metric versions. As a standard, the tools have an adjustment system for channel cutting reach, 22.2 mm to 54.0 mm (as counted from the bottom face to the internal edge of the channel being cut).

Work best with KDM - Krais Drilling Machine.



CUTTER BITS



Example of cutter bits, available as optional.

NOTE!

For tube sheet holes bigger up to 0,25 mm than tube OD the tailor-made mandrel should be considered. Hole bigger more than 0,25 mm may create a damage of the tool mandrel or drilling machine!

TUBE OD		TOOL NO.	PILOT RANGE	SPARE BITS	
[INCH]	[MM]			NON FERROUS OR CARBON STEEL	STAINLESS
3/8"	9,50	TEF-375	16 – 20	TEF-376	TEF-376-SS
1/2"	12,7	TEF-500	16 – 20	TEF-506	TEF-506-SS
5/8"	15,8	TEF-625	14 – 18	TEF-626	TEF-626-SS
3/4"	19,0	TEF-750	10 – 18	TEF-756	TEF-756-SS
7/8"	22,2	TEF-875	14 – 18	TEF-876	TEF-876-SS
1"	25,4	TEF-1000	10 – 18	TEF-1006	TEF-1006-SS
1-1/4"	31,7	TEF-1250	10 – 18	TEF-1256	TEF-1256-SS
1-1/2"	38,1	TEF-1500	10 – 18	TEF-1506	TEF-1506-SS
2"	50,8	TEF-2000	10 – 18	TEF-2006	TEF-2006-SS
2-1/2"	63,5	TEF-2500	10 – 18	TEF-2506	TEF-2506-SS

IMPERIAL VERSION TOOLS

Tool No.	Tube OD	Tool Bits (spacing)		
	[inch]	1/8 x 1/4 x 1/8"	1/8 x 3/8 x 1/8"	1/8 x 1/8 x 1/8"
JGS-375	3/8"	ST-3703-S	ST-3703	ST-3703-SPEC
JGS-500	1/2"	ST-5003-S	ST-5003	ST-5003-SPEC
JGS-625	5/8"	ST-6203-S	ST-6203	ST-6203-SPEC
JGS-750	3/4"	ST-7503-S	ST-7503	ST-7503-SPEC
JGS-875	7/8"	ST-7503-S	ST-7503	ST-7503-SPEC
JGS-1000	1"	ST-7503-S	ST-7503	ST-7503-SPEC
JGS-1250	1-1/4"	ST-7503-S	ST-7503	ST-7503-SPEC
JGS-1500	1-1/2"	ST-7503-S	ST-7503	ST-7503-SPEC
JGS-2000	2"	ST-7503-S	ST-7503	ST-7503-SPEC
JGS-2500	2-1/2"	ST-7503-S	ST-7503	ST-7503-SPEC

METRIC VERSION TOOLS

Tool No.	Tube OD	Tool Bits (spacing)		
	[mm]	3 x 6 x 3 mm	3 x 9 x 2 mm	3 x 3 x 3 mm
JGS-375-10	10,00	GS-106	GS-109	GS-103
JGS-500-12	12,00	GS-206	GS-209	GS-203
JGS-625-16	16,00	GS-306	GS-309	GS-303
JGS-750-20	20,00	GS-406	GS-409	GS-403
JGS-875-22	22,00	GS-406	GS-409	GS-403
JGS-1000-25	25,00	GS-406	GS-409	GS-403
JGS-1250-32	32,00	GS-406	GS-409	GS-403
JGS-1500-38	38,00	GS-406	GS-409	GS-403
JGS-2000-51	51,00	GS-406	GS-409	GS-403

Other sizes and bits on request.

TOOL BIT SPACING



MWR-JGS MINI GROOVING TOOL

First in the world, quick, powerful, yet handheld machine for serrating tube sheet in heat exchangers, boiler drums, FinFan coolers and other tubular vessels that need grooves in the tube sheet. Tool uses one cutting bit for cut any material tubes.

This unique system safely and quickly produces grooves in under 20 second for 1" tube.

Can be used as a tool for maintenance companies as well as the production tool with our dual pneumatic locking system and pneumatic cooling and lubricating module.

CUTTING RANGE		FREE SPEED		POWER		TORQUE	
Up to 101,6 mm		100 Rpm		1,3 Hp		140 Nm	
Up to 4"						105 Ft.Lbs	
AIR USE		BODY WIDTH		BODY HEIGHT		BODY WEIGHT	
55 cfm	1,3 m3/min	2,32"	59 mm	13,1"	335 mm	17,5 Lbs	8 kg



MWR-JGS ON REGULAR TUBE SHEET



On standard heat exchangers machine locks onto two shafts on the adjacent holes. The locking plate is manufactured according to the tube hole pitch to ensure precise tool alignment.

MWR-JGS REACTION PLATES



Standard locking plate has 2 reaction shafts, located from each side of the spindle. We can also supply locking plate that has locking shaft located on one side of the spindle and can be rotated through 180 degrees to accommodate partition plates, channel heads etc.

MWR-JGS E

MWR-JGS E is the electric version of the Mini Grooving Tool. The standard machine covers the same tube sizes. The electric motor, made by Makita, has a 3 stage planetary gear box manufactured by KRAIS. It has variable speed control and produces enormous torque. It is interchangeable with our pneumatic drive and can be purchased at any time.

Free Speed	115 RPM
Power	750 W
Torque	368 Nm (280 Ft.Lbs)
Feed Stroke	25 mm (1")



Full range of the grooving tools from 1/2" to 4"



The rollers over the circumference of the mandrel allow to achieve a perfect surface of the hole.

GROOVING TOOLS FOR MWR-JGS




TUBE SIZE	TOOL NUMBER	TOOL BIT 1/8X1/4X1/8"	TOOL BIT 3X6X3 MM	TOOL BIT SPRING	MANDREL	TURNING ROLS
1/2"	JGS-MWR-127	ST-5003-S	GS-206	ST-5011	GS-MWR-127	-
5/8"	JGS-MWR-158	ST-6203-S	GS-306	ST-6211	GS-MWR-158	-
16 mm	JGS-MWR-160	ST-6203-S	GS-306	ST-6211	GS-MWR-160	-
3/4"	JGS-MWR-190-R	ST-7503-S	GS-406	ST-7511	GS-MWR-190-R	STR-3-55
20 mm	JGS-MWR-200-R	ST-7503-S	GS-406	ST-7511	GS-MWR-200-R	STR-4-55
22 mm	JGS-MWR-220-R	ST-7503-S	GS-406	ST-7511	GS-MWR-220-R	STR-4-55
7/8"	JGS-MWR-222-R	ST-7503-S	GS-406	ST-7511	GS-MWR-222-R	STR-5-55
25 mm	JGS-MWR-250-R	ST-7503-S	GS-406	ST-7511	GS-MWR-250-R	STR-5-55
1"	JGS-MWR-254-R	ST-7503-S	GS-406	ST-7511	GS-MWR-254-R	STR-5-55
1-1/8"	JGS-MWR-285-R	ST-7503-S	GS-406	ST-7511	GS-MWR-285-R	STR-5-55
1-1/4"	JGS-MWR-317-R	ST-7503-S	GS-406	ST-7511	GS-MWR-317-R	STR-5-55
1-1/2"	JGS-MWR-381-R	ST-7503-S	GS-406	ST-7511	GS-MWR-381-R	STR-5-55
1-3/4"	JGS-MWR-444-R	ST-7503-S	GS-406	ST-7511	GS-MWR-444-R	STR-5-55
2"	JGS-MWR-508-R	ST-7503-S	GS-406	ST-7511	GS-MWR-508-R	STR-5-55
51"	JGS-MWR-510-R	ST-7503-S	GS-406	ST-7511	GS-MWR-510-R	STR-5-55
2-1/4"	JGS-MWR-751-R	ST-7503-S	GS-406	ST-7511	GS-MWR-751-R	STR-5-55
2-1/2"	JGS-MWR-635-R	ST-7503-S	GS-406	ST-7511	GS-MWR-635-R	STR-5-55
2-3/4" *	JGS-MWR-698-R	ST-7503-S	GS-406	ST-7511	GS-MWR-698-R	STR-5-55
3" *	JGS-MWR-762-R	ST-7503-S	GS-406	ST-7511	GS-MWR-762-R	STR-5-55
4" *	JGS-MWR-1002-R	ST-7503-S	GS-406	ST-7511	GS-MWR-1002-R	STR-5-55


* tool needs speed reducer

WORKING RANGES FOR UNIVERSAL BEVELING TOOLS


HOW TO READ IT

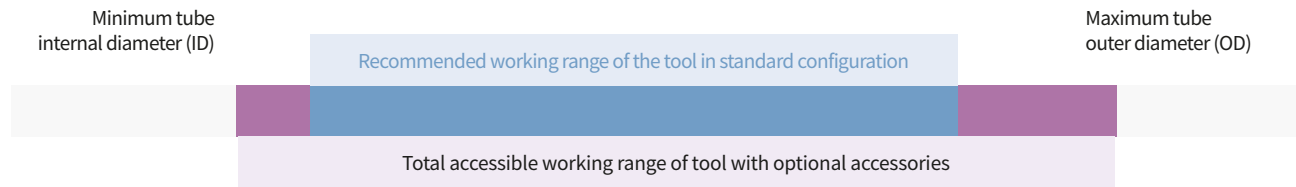

MILL SERIE WORKING RANGES (UNIVERSAL TOOLS)

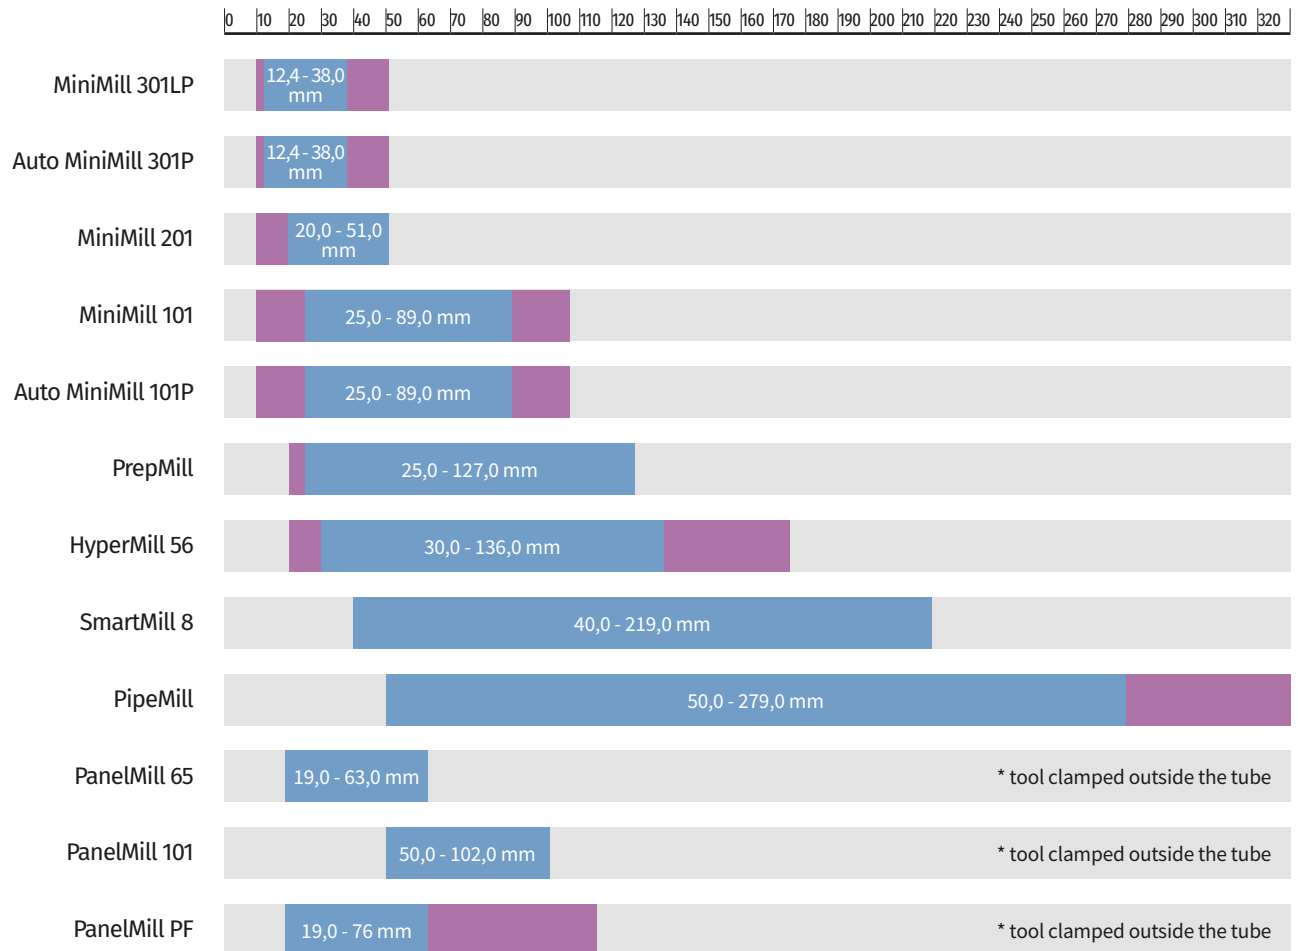


LATHE SERIE WORKING RANGES (UNIVERSAL TOOLS)

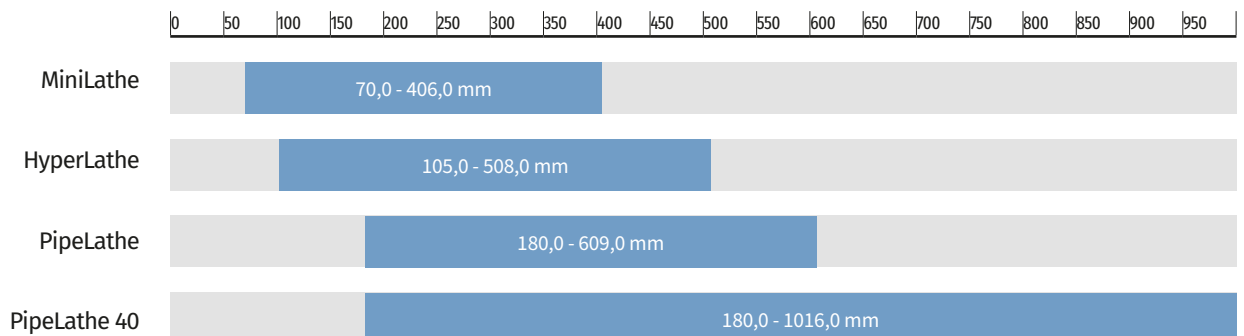





HOW TO PROPER LOCK BEVELING MACHINES

FOR: MINIMILL 101, MINIMILL 201, MINIMILL 301LP AND AUTO MINIMILL WITH MINISHAFT.





In order to obtain the best possible centring of the MiniMill into the faced, bevel or weld removal tube, we recommend to select the shaft with diameter closest possible to the inner diameter of tube.

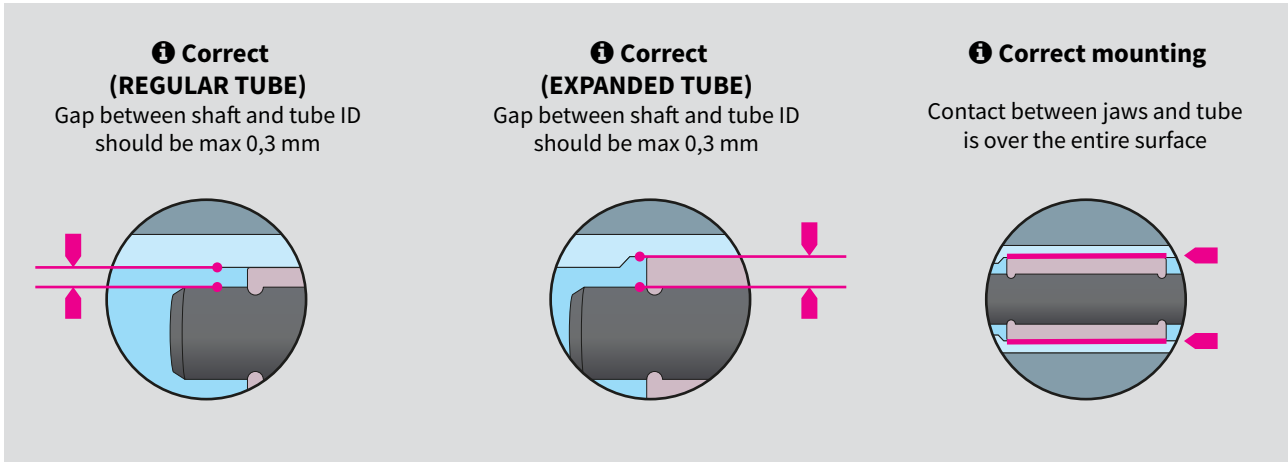

✗ WRONG JAWS SETUP

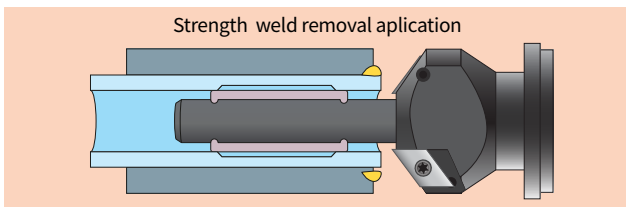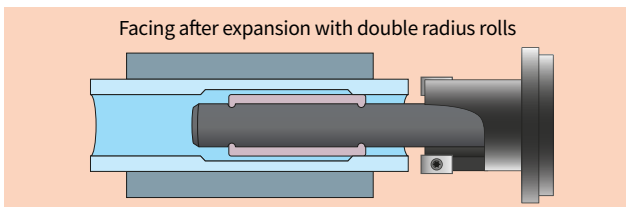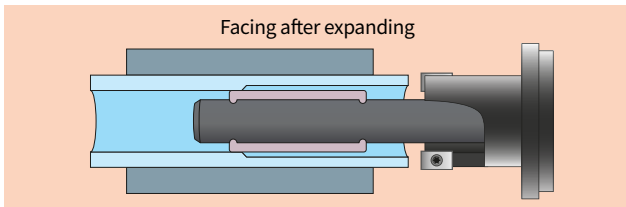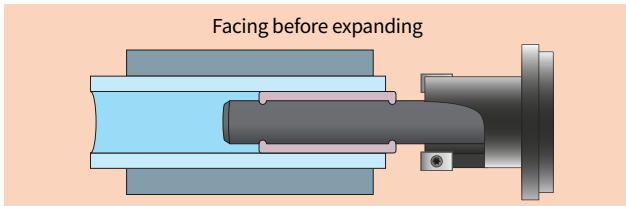

✓ CORRECT JAWS SETUP

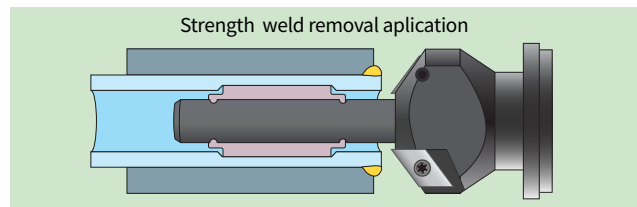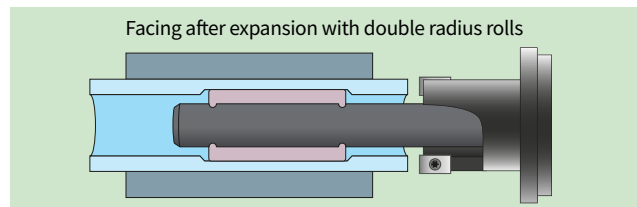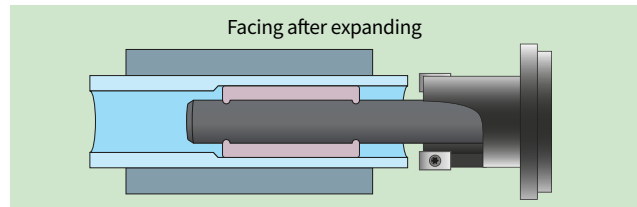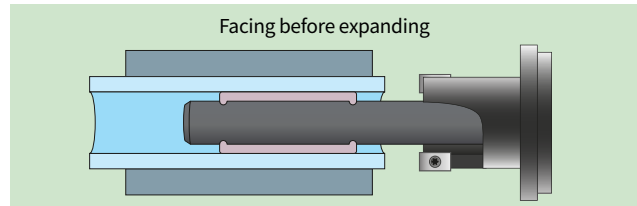

CORRECT SHAFT CHOICE

FOR: MINIMILL 101, MINIMILL 201, MINIMILL 301LP AND AUTO MINIMILL WITH MICRO- OR MINISHAFT.

In order to obtain the best possible centering of the MiniMill into the faced, bevel or weld removal tube, we recommend to select the shaft with diameter closest possible to the inner diameter of tube.

If the shaft is too thin it is exposed to large probability that the MiniMill will be installed non parallel to the axis of the tube. As well as the jaws may not fully grip the tube with its full face but with the corners only, and will result a non-square face of the tube to the tube sheet as well as there is a big probability that it may result the breaking of guide shaft as the machine might be forced into strong vibration what may created a sudden collision with tube or tube sheet. We strongly recommend to look on this, specially for tubes $\frac{3}{4}$ " O.D.

IMPORTANT NOTE!

The guide shafts in the chart are selected for non-expanded tubes. If the tubes are expanded, a different, bigger diameter shaft has to be considered. As well as the contact length of the locking jaws has to be shorter than the length of the effective expansion length. It is unacceptable if the jaws are longer than the expansion and lock only partially on non-expanded part of tube. In that circumstances the locking jaws must be shaped to be able to lock only on the expanded part of the tube.

MICROSHAFT NUMBERS

SHAFT	[MM]	[INCH]	SPRING
800 MM#151	9,00	0,354	O-7
801 MM#151	10,00	0,394	DW-8,5
805 MM#151	11,00	0,453	DW-10

MICROSHAFT LOCKING RANGES

RANGE [MM]		RANGE [INCH]		JAWS
MIN	MAX	MIN	MAX	
10,00	11,00	0,394	0,433	301 MM#36
11,00	12,00	0,433	0,472	303 MM#36
12,00	13,00	0,472	0,512	305 MM#36
13,00	14,00	0,512	0,551	307 MM#36
14,00	15,00	0,551	0,591	309 MM#36

MINISHAFT NUMBERS

TUBE OD	BWG	SHAFT	[MM]	[INCH]	SPRING
3/4"	11	901 MM#151	12,40	0,492	DW-11
	11	911 MM#151	12,60	0,496	DW-11
	12	912 MM#151	13,20	0,519	DW-11
	13	905 MM#151	13,90	0,547	DW-12,5
	14	914 MM#151	14,50	0,570	DW-12,5
	15	9151 MM#151	15,10	0,594	DW-12,5
	16	916 MM#151	15,50	0,610	DW-12,5
	17	917 MM#151	15,70	0,622	DW-12,5
	18	918 MM#151	16,30	0,641	DW-15,5
	20	909 MM#151	16,80	0,661	DW-15,5
7/8"	10	9151 MM#151	15,10	0,594	DW-12,5
	11	917 MM#151	15,70	0,622	DW-12,5
	12	922 MM#151	16,40	0,645	DW-15,5
	13	923 MM#151	17,10	0,673	DW-15,5
	14	924 MM#151	17,70	0,696	DW-15,5
	15	925 MM#151	18,30	0,700	DW-15,5
	16	926 MM#151	18,60	0,732	DW-15,5
	18	928 MM#151	19,50	0,767	DW-15,5
1"	8	909 MM#151	16,80	0,661	DW-15,5
	9	938 MM#151	17,50	0,688	DW-15,5
	10	925 MM#151	18,30	0,700	DW-15,5
	11	931 MM#151	19,00	0,748	O-16
	12	932 MM#151	19,60	0,771	O-16
	13	915 MM#151	20,00	0,787	O-17
	14	934 MM#151	20,90	0,822	O-17
	16	936 MM#151	21,80	0,858	O-17
	18	938 MM#151	22,60	0,889	O-7

MINISHAFT LOCKING RANGES WITH

RANGE [MM]		RANGE [INCH]		JAWS
MIN	MAX	MIN	MAX	
12,40	14,50	0,488	0,571	201 MM#36
13,90	16,00	0,547	0,630	203 MM#36
15,90	18,00	0,626	0,709	205 MM#36
16,90	19,00	0,665	0,748	207 MM#36
18,90	21,00	0,744	0,827	209 MM#36
19,90	22,00	0,783	0,866	211 MM#36
20,90	23,00	0,823	0,906	213 MM#36
21,90	24,00	0,862	0,944	214 MM#36
23,60	25,60	0,929	1,008	215 MM#36
25,20	27,20	0,992	1,071	217 MM#36
26,80	28,80	1,055	1,134	219 MM#36
28,40	30,40	1,118	1,197	221 MM#36
30,00	32,00	1,181	1,260	223 MM#36
31,60	33,60	1,244	1,323	225 MM#36
33,20	35,20	1,307	1,386	227 MM#36
34,80	36,80	1,370	1,449	229 MM#36
36,40	38,40	1,433	1,512	231 MM#36
38,00	40,00	1,496	1,575	233 MM#36
39,60	41,60	1,559	1,638	235 MM#36
41,20	43,20	1,622	1,701	237 MM#36
42,80	44,80	1,685	1,764	239 MM#36
44,40	46,40	1,748	1,827	241 MM#36
46,00	48,00	1,811	1,890	243 MM#36


We do offer non-standard size and non-standard shaped jaws upon receiving a drawing of the tube expansion details.

PREPMILL**SIGNATURE BEVELER FOR BOILER-WORKS.
BUILT TO LAST!**


The PrepMill series pneumatic tube facing, beveling and weld removal machine. The PrepMill is a rugged, fast, portable weld end preparation lathe for various tubes including stainless steel and other high chromium alloys. Machine is constructed on two opposite set up taper roller bearings that makes the machine extremely stable and very rigid and compact. A standard machine is equipped to cover 25 to 122 mm ID (1" to 4,8") with a 116 mm cutter head.

STANDARD SET UP**SHAFT25**

Self-align, heavy duty locking system. Shafts and jaws are longer and wider to ensure maximum clamping force.

**116 MM (4,56")**

The large cutter head, designed to fasten the wide range of cutting inserts.

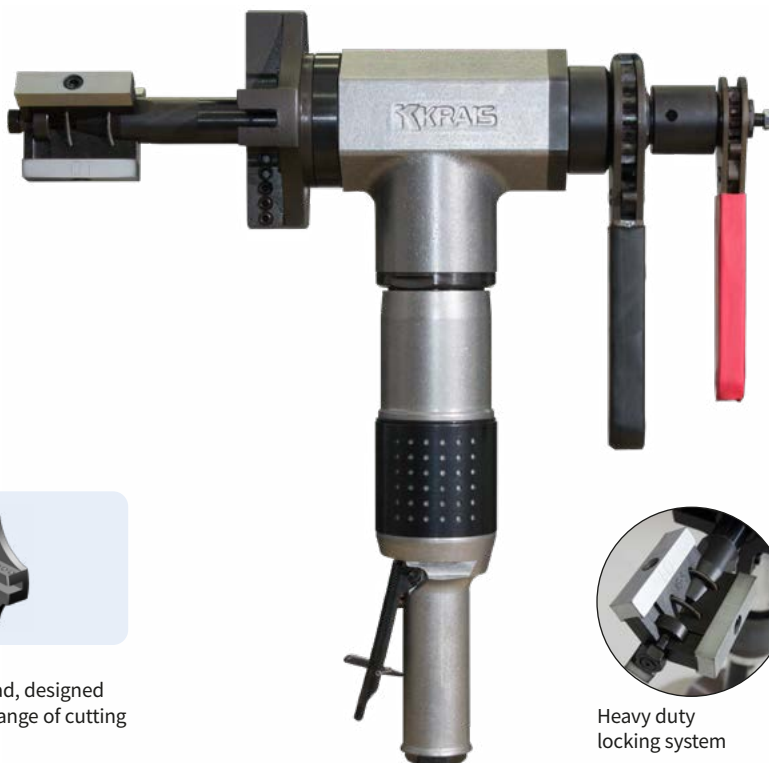

Heavy duty locking system

STANDARD WORKING RANGE		TOTAL WORKING RANGE	
APPLICATION RANGE	LOCKING RANGE	APPLICATION RANGE	LOCKING RANGE
25 – 127 mm	25 – 122 mm	20 – 127 mm	20 – 122 mm
1 – 5"	1,0 – 4,8"	0,787 – 5"	0,787 – 4,8"
FEED STROKE		POWER	
25 mm	1"	1,3 hp	
FREE SPEED		TORQUE	
120 rpm		140 Nm	105 Ft.lbs
AIR USE		BODY WIDTH	
55 cfm	1,3 m ³ /min	2,59"	66 mm
BODY HEIGHT		BODY WEIGHT	
14,5"	370 mm	20,5 Lbs	9,5 kg

PREPMILL-E

PrepMill-E is electric version of PrepMill.

A standard machine can cover the same pipe sizes and comes with the same cutting head. The electric motor made by Makita with 3 stage planetary gear box made by KRAIS has variable speed control and produce enormous torque. Is interchangeable with pneumatic drive and can be purchased separately at any time.

Free Speed 115 RPM
Power..... 750 W
Torque 368 Nm (280 Ft.Lbs)
Feed Stroke 25 mm (1")

**EXAMPLE TOOL APPLICATION**

PrepMill with its 66 mm (2-5/8) width body perfectly fit into limited access areas such as Water wall panels. Easy to clamp and feed with our heavy duty ratchet or star wheel feed.

OPTIONAL HEADS**66 MM (2,59")**

The smallest cutter head, designed to fasten the wide range of cutting inserts.

**88 MM (3,46")**

The popular, medium cutter head, designed to fasten the wide range of cutting inserts.

**OBPM**

Head for outside bevelling of tubes and pipes. Available in wide range of diameters and beveling angles.

→ TABLE PAGE 112

**PRRMBH**

Head for membrane and overlay removal. Efficiently remove material between boiler tubes.

→ TABLE PAGE 112

**STWRPM**

Head dedicated for strength weld removal. Heads are easy to align and sized per tube diameter.

→ TABLE PAGE 113

**TFPM**

Tube facing milling head for tubes made of any type of material. Utilizes 6% cobalt inserts.

→ TABLE PAGE 113

OPT. SHAFT**SHAFT20**

Self-align, heavy duty locking system. Shafts and jaws are longer and wider to ensure maximum clamping force.

**HEAD FLANGE**

Adapter to use all MiniMill's special cutter heads (from size 1-1/2" and up).

**SPEED REDUCER**

Easy to use gearbox for 3x speed reduction. Increases the torque, enabling the machine to generate a thick chip whilst reducing the cutting time.

**FAST CLAMPING SYSTEM**

System offers rapid tube to tube cycle time, increased productivity (up to 4x) with little operator fatigue. Ideal for large amount of end preps.

**STAR WHEEL**

The most precise feed system. Used in many basic and demanding applications.

LOCKING RANGES WITH DEFAULT SHAFT25**STANDARD JAWS SET FOR DEFAULT SHAFT**

RANGE [MM]		RANGE [INCH]		JAWS	EXT.	SPRING	
MIN	MAX	MIN	MAX			NO.	QTY.
25	30	0,984	1,181	NS-1	-	SP-24	1
30	35	1,181	1,378	NS-2	-	SP-24	1
35	40	1,378	1,575	NS-3	-	SP-25	2
40	45	1,575	1,772	NS-4	-	SP-25	2
45	50	1,772	1,969	NS-5	-	SP-25	2
50	55	1,969	2,165	NS-6	-	SP-25	2
55	60	2,165	2,362	NS-7	-	SP-25	2
60	65	2,362	2,559	NS-8	-	SP-25	2
62	67	2,441	2,638	NS-5	NS-10	SP-25	2
67	72	2,638	2,835	NS-6	NS-10	SP-25	2
72	77	2,835	3,031	NS-7	NS-10	SP-25	2
77	82	3,031	3,228	NS-8	NS-10	SP-25	2
82	87	3,228	3,425	NS-5	NS-20	SP-25	2
87	92	3,425	3,622	NS-6	NS-20	SP-25	2
92	97	3,622	3,819	NS-7	NS-20	SP-25	2
97	102	3,819	4,016	NS-8	NS-20	SP-25	2
102	107	4,016	4,213	NS-5	NS-30	SP-25	2
107	112	4,213	4,409	NS-6	NS-30	SP-25	2
112	117	4,409	4,606	NS-7	NS-30	SP-25	2
117	122	4,606	4,803	NS-8	NS-30	SP-25	2

LOCKING RANGES WITH SHAFT20 (OPTION)

RANGE [MM]		RANGE [INCH]		JAWS	EXT.	SPRING	
MIN	MAX	MIN	MAX			NO.	QTY.
20	24	0,787	0,945	NS-0	-	SP-19	1
24	28	0,945	1,102	NS-1	-	SP-19	1

EXAMPLE TOOL APPLICATION

MINIMILL 101

The MiniMill 101 is a rugged, fast, portable weld end preparation lathe designed for various tubes and pipes, including stainless steel and other high chromium materials. Our standard machine can be used for pipe sizes of 20 - 74 mm i.d. (0.787" - 2.913") and comes with a 88 mm cutting head.

IMPORTANT!
Read how to properly lock on page 52

STANDARD SET UP



SHAFT25
Self-align, heavy duty locking system. Shafts and jaws are longer and wider to ensure maximum clamping force.



88 MM (3,46")
The popular, medium cutter head, designed to fasten the wide range of cutting inserts.



Heavy duty locking system

STANDARD WORKING RANGE				TOTAL WORKING RANGE			
APPLICATION RANGE		LOCKING RANGE		APPLICATION RANGE		LOCKING RANGE	
25 – 89 mm		25 – 77 mm		10 – 107 mm		10 – 102 mm	
0,984 – 3,504"		0,984 – 3,031"		0,394 – 4,213"		0,394 – 4,016"	
FEED STROKE		POWER		FREE SPEED		TORQUE	
20 mm	0,787"	1,3 hp		100 rpm	140 Nm	105 Ft.lbs	
AIR USE		BODY WIDTH		BODY HEIGHT		BODY WEIGHT	
55 cfm	1,3 m³/min	2,32"	59 mm	13,1"	335 mm	11,4 Lbs	5,2 kg

OTHER OPTIONAL ACCESSORIES



RATCHET FEED
Feed system allowing to work in narrow and tight locations, eg. in water walls.



FAST CLAMPING SYSTEM
System offers rapid tube to tube cycle time, increased productivity (up to 4x) with little operator fatigue. Ideal for large amount of end prep.



SPEED REDUCER
Easy to use gearbox for 3x speed reduction. Increases the torque, enabling the machine to generate a thick chip whilst reducing the cutting time.

OPTIONAL HEADS**60 MM (2,36")**

The smallest cutter head, designed to fasten the wide range of cutting inserts.

**106 MM (4,56")**

The popular, large cutter head, designed to fasten the wide range of cutting inserts.

**OBMH**

Head for beveling tubes without membranes in the boiler water walls.

→ TABLE PAGE 110

**SWROTC**

Seal weld removal head over tube circumference prior to re-welding the damaged joint without removing the tube.

→ TABLE PAGE 111

**STWRMH**

Head dedicated for strength weld removal. Heads are easy to align and sized per tube diameter.

→ TABLE PAGE 109

**TFMH**

Tube facing milling head for tubes made of any type of material. Utilizes 6% cobalt inserts.

→ TABLE PAGE 109

OPTIONAL SHAFTS**MICROSHAFT**

A system with interchangeable guide shafts. A complete set covers 10,0 to 15,0 mm ID tubes.

**MINISHAFT**

A system with interchangeable guide shafts. A complete set covers 12,4 to 48,0 mm ID tubes.

MINIMILL 101E

MiniMill 101E is electric version of MiniMill 101. A standard machine cover the same pipe sizes and comes with the same cutting head. The electric motor made by Makita with 3 stage planetary gear box made by KRAIS has variable speed control and produce enormous torque. Is interchangeable with pneumatic drive and can be purchased separately at any time.

Free Speed 115 RPM
Power 750 W
Torque 366 NM (280 Ft.Lbs)
Feed Stroke 20 mm (0,787")

**LOCKING RANGES WITH DEFAULT SHAFT25****STANDARD JAWS SET FOR DEFAULT SHAFT**

RANGE [MM]		RANGE [INCH]		JAWS	EXT.	SPRING	
MIN	MAX	MIN	MAX			NUMBER	QTY.
25	30	0,984	1,181	NS-1	-	SP-24	1
30	35	1,181	1,378	NS-2	-	SP-24	1
35	40	1,378	1,575	NS-3	-	SP-25	2
40	45	1,575	1,772	NS-4	-	SP-25	2
45	50	1,772	1,969	NS-5	-	SP-25	2
50	55	1,969	2,165	NS-6	-	SP-25	2
55	60	2,165	2,362	NS-7	-	SP-25	2
60	65	2,362	2,559	NS-8	-	SP-25	2
62	67	2,441	2,638	NS-5	NS-10	SP-25	2
67	72	2,638	2,835	NS-6	NS-10	SP-25	2
72	77	2,835	3,031	NS-7	NS-10	SP-25	2

OPTIONAL JAWS FOR DEFAULT SHAFT

RANGE [MM]		RANGE [INCH]		JAWS	EXT.	SPRING	
MIN	MAX	MIN	MAX			NUMBER	QTY.
77	82	3,031	3,228	NS-8	NS-10	SP-25	2
82	87	3,228	3,425	NS-5	NS-20	SP-25	2
87	92	3,425	3,622	NS-6	NS-20	SP-25	2
92	97	3,622	3,819	NS-7	NS-20	SP-25	2
97	102	3,819	4,016	NS-8	NS-20	SP-25	2
102	107	4,016	4,213	NS-5	NS-30	SP-25	2

LOCKING RANGES WITH SHAFT20 (OPTION)

RANGE [MM]		RANGE [INCH]		JAWS	EXT.	SPRING	
MIN	MAX	MIN	MAX			NUMBER	QTY.
20	24	0,787	0,945	NS-0	-	SP-19	1
24	28	0,945	1,102	NS-1	-	SP-19	1

LOCKING RANGES FOR DEFAULT MINISHAFT SET (OPTION)

SHAFT	SIZE		JAWS	RANGE [MM]		RANGE [INCH]		SPRING
	[INCH]	[MM]		MIN	MAX	MIN	MAX	
901MM#151	12,40	0,492	201MM#36	12,40	14,50	0,488	0,571	DW-11
905MM#151	13,90	0,547	203 MM#36	13,90	16,00	0,547	0,630	DW-12,5
909MM#151	16,90	0,661	205 MM#36	15,90	18,00	0,626	0,709	DW-15,5
			207 MM#36	16,90	19,00	0,665	0,748	
			209 MM#36	18,90	21,00	0,744	0,827	
			211 MM#36	19,90	22,00	0,783	0,866	
			213 MM#36	20,90	23,00	0,823	0,906	
			214 MM#36	21,90	24,00	0,862	0,944	

For other Minishaft numers see table on page 7.

LOCKING RANGES FOR DEFAULT MICROSHAFT SET (OPTION)

SHAFT	SIZE		JAWS	RANGE [MM]		RANGE [INCH]		SPRING
	[INCH]	[MM]		MIN	MAX	MIN	MAX	
800MM#151	0,354	9,00	301MM#36	10,00	11,00	0,394	0,433	DW-7,5
801MM#151	0,394	10,00	303MM#36	11,00	12,00	0,433	0,472	DW-8,5
805MM#151	0,453	11,50	305MM#36	12,00	13,00	0,472	0,512	DW-10
			307MM#36	13,00	14,00	0,512	0,551	
			309MM#36	14,00	15,00	0,551	0,591	

MINIMILL 201

The MiniMill 201 is a rugged, fast, portable weld end preparation lathe for various tubes including stainless steel and other high chromium alloys. A standard machine comes complete with a 60 mm head, a locking system and includes all jaw sets to cover sizes of 20 to 44 mm (0.787" to 1.732")

IMPORTANT!
Read how to properly lock on page 52

STANDARD SET UP



SHAFT20
Redesigned heavy duty locking system. Shafts and jaws are longer and wider to ensure maximum clamping force. The jaws are self-align.



60 MM (2,36")
The smallest cutter head, designed to fasten the wide range of cutting inserts.



STANDARD WORKING RANGE		TOTAL WORKING RANGE			
APPLICATION RANGE		LOCKING RANGE		APPLICATION RANGE	LOCKING RANGE
20 – 51 mm		20 – 48 mm		10 – 51 mm	10 – 48 mm
0,787 – 2,008"		0,787 – 1,890"		0,394 – 2,008"	0,394 – 1,890"
FEED STROKE		POWER		FREE SPEED	
20 mm	0,787"	1,3 hp		200 rpm	TORQUE
				72 Nm	53 Ft.lbs
AIR USE		BODY WIDTH		BODY HEIGHT	
55 cfm	1,3 m³/min	2,32"	59 mm	13,1"	335 mm
				11,4 Lbs	5,2 kg

EXAMPLE TOOL APPLICATION



Standard locking system with handle feed makes quick work of trimming back tubes.



Completed strength weld removal.



Facing, bevelling tubes quickly and safely.

OPTIONAL HEADS**88 MM (3,46")**

The popular, medium cutter head, designed to fasten the wide range of cutting inserts.

**OBMH**

Outside bevelling of both tubes and pipes. Sized per tube or pipe diameter and angle of required weld bevel.

→ **TABLE** **PAGE 110**

**SWROTC**

Seal weld removal head over tube circumference prior to re-welding the damaged joint without removing the tube.

TABLE **PAGE 111**

**STWRMH**

Custom designed head dedicated for strength weld removal. Heads are sized per tube diameter.

→ **TABLE** **PAGE 109**

OPTIONAL SHAFTS**MICROSHAFT**

A system with interchangeable guide shafts. A complete set covers 9,0 to 15,0 mm inside diameter.

**MINISHAFT**

A system with interchangeable guide shafts. A complete set covers 12,4 to 48 mm inside diameter.

OTHER OPTIONAL ACCESSORIES**FAST CLAMPING SYSTEM**

System offers rapid tube to tube cycle time, increased productivity (up to 4x) with little operator fatigue. Ideal for large amount of end preps.

**SPEED REDUCER**

Easy to use gearbox for 3x speed reduction. Increases the torque, enabling the machine to generate a thick chip whilst reducing the cutting time.

**LEVER FEED**

Quick and easy feed system. Used in many basic applications.

**RATCHET FEED**

Feed system allowing to work in narrow and tight locations, eg. in water walls.

LOCKING RANGES WITH DEFAULT SHAFT20**STANDARD JAWS SET**

RANGE [MM]		RANGE [INCH]		JAWS	EXT.	SPRING	
MIN	MAX	MIN	MAX			NUMBER	QTY.
20	24	0,787	0,945	NS-0	-	SP-19	1
24	28	0,945	1,102	NS-1	-	SP-19	1
28	33	1,102	1,299	NS-2	-	SP-19	1
33	38	1,299	1,496	NS-3	-	SP-20	2
38	43	1,496	1,693	NS-4	-	SP-20	2
43	48	1,693	1,890	NS-5	-	SP-20	2

LOCKING RANGES FOR DEFAULT MINISHAFT SET (OPTION)

SHAFT NUMBER	SIZE		JAWS	RANGE [MM]		RANGE [INCH]		SPRING
	[INCH]	[MM]		MIN	MAX	MIN	MAX	
901MM#151	12,40	0,492	201MM#36	12,40	14,50	0,488	0,571	DW-11
905MM#151	13,90	0,547	203 MM#36	13,90	16,00	0,547	0,630	DW-12,5
909MM#151	16,90	0,661	205 MM#36	15,90	18,00	0,626	0,709	DW-15,5
			207 MM#36	16,90	19,00	0,665	0,748	
			209 MM#36	18,90	21,00	0,744	0,827	
			211 MM#36	19,90	22,00	0,783	0,866	
			213 MM#36	20,90	23,00	0,823	0,906	
			214 MM#36	21,90	24,00	0,862	0,944	

For other Minishaft numbers see table on page 7.

LOCKING RANGES FOR DEFAULT MICROSHAFT SET (OPTION)

SHAFT NUMBER	SIZE		JAWS	RANGE [MM]		RANGE [INCH]		SPRING
	[INCH]	[MM]		MIN	MAX	MIN	MAX	
800MM#151	0,354	9,00	301MM#36	10,00	11,00	0,394	0,433	DW-7,5
801MM#151	0,394	10,00	303MM#36	11,00	12,00	0,433	0,472	DW-8,5
805MM#151	0,453	11,50	305MM#36	12,00	13,00	0,472	0,512	DW-10
			307MM#36	13,00	14,00	0,512	0,551	
			309MM#36	14,00	15,00	0,551	0,591	

MINIMILL 301LP

The fastest and strongest facing machine on the market. Engineered for safety and ease of use, featuring a pneumatic locking system with a double piston cylinder. Compact milling head with double cutting edge inserts with 6% cobalt. For all types of material including: ferrous, non-ferrous, stainless and exotic alloys steel, duplex, inconel and titanium.

IMPORTANT!
Read how to properly lock on page 52

STANDARD SET UP



MINISHAFT
A system with interchangeable guide shafts. A complete set covers 12,4 to 48,0 mm ID tubes.



60 MM (2,36")
The smallest cutter head, designed to fasten the wide range of cutting inserts.



STANDARD WORKING RANGE		TOTAL WORKING RANGE	
APPLICATION RANGE	LOCKING RANGE	APPLICATION RANGE	LOCKING RANGE
12,4 – 38,0 mm	12,4 – 24,0 mm	10 – 51 mm	10 – 48 mm
0,488 – 1,496"	0,488 – 0,945"	0,394 – 2,008"	0,394 – 1,890"
FEED STROKE		FREE SPEED	
20 mm	0,787"	300 rpm	43 Nm
POWER		TORQUE	
1,3 hp		32 Ft.lbs	
AIR USE		BODY HEIGHT	
55 cfm	1,3 m³/min	13,1"	335 mm
BODY WIDTH		BODY WEIGHT	
2,32"	59 mm	15,4 Lbs	7 kg

EXAMPLE TOOL APPLICATION



The fast locking and the handle feed make this system very efficient for heat exchanger manufacturers.

EXAMPLE TOOL APPLICATION



A real application: shortening a bundle. MiniMill can deal with this task quickly and efficiently.



Double sided inserts and fixed diameter heads ensure unsurpassed efficiency and quality. Mechanical stops ensure identical tube projection.

OPTIONAL HEADS**TFMH**

Tube facing milling head for tubes made of any type of material. Utilizes 6% cobalt inserts.

→ TABLE PAGE 109

**MMFH**

Tube facing milling head for tubes made of hardest type of materials. Utilizes carbide inserts with 4 blades.

→ TABLE PAGE 111

**STWRMH**

Head dedicated for strength weld removal. Heads are easy to align and sized per tube diameter.

→ TABLE PAGE 109

OPTIONAL SHAFTS**MICROSHAFT**

A system with interchangeable guide shafts. A complete set covers 9,0 to 15,0 mm inside diameter.

**SHAFT20**

Self-align, heavy duty locking system. Shafts and jaws are longer and wider to ensure maximum clamping force.

OTHER OPTIONAL ACCESSORIES**SPEED REDUCER**

Easy to use gearbox for 3x speed reduction. Increases the torque, enabling the machine to generate a thick chip whilst reducing the cutting time.

**STAR WHEEL**

The most precise feed system. Used in many basic and demanding applications.

LOCKING RANGES WITH STANDARD SET UP**SHAFT: MINISHAFT**

SHAFT	SIZE		JAWS	RANGE [MM]		RANGE [INCH]		SPRING
	[INCH]	[MM]		MIN	MAX	MIN	MAX	
901MM#151	12,40	0,492	201MM#36	12,40	14,50	0,488	0,571	DW-11
905MM#151	13,90	0,547	203 MM#36	13,90	16,00	0,547	0,630	DW-12,5
909MM#151	16,90	0,661	205 MM#36	15,90	18,00	0,626	0,709	DW-15,5
			207 MM#36	16,90	19,00	0,665	0,748	
			209 MM#36	18,90	21,00	0,744	0,827	
			211 MM#36	19,90	22,00	0,783	0,866	
			213 MM#36	20,90	23,00	0,823	0,906	
			214 MM#36	21,90	24,00	0,862	0,944	

For other Minishaft numbers see table on page 7.

LOCKING RANGES FOR DEFAULT MICROSHAFT SET (OPTION)

SHAFT	SIZE		JAWS	RANGE [MM]		RANGE [INCH]		SPRING
	[INCH]	[MM]		MIN	MAX	MIN	MAX	
800MM#151	0,354	9,00	301MM#36	10,00	11,00	0,394	0,433	DW-7,5
801MM#151	0,394	10,00	303MM#36	11,00	12,00	0,433	0,472	DW-8,5
805MM#151	0,453	11,50	305MM#36	12,00	13,00	0,472	0,512	DW-10
			307MM#36	13,00	14,00	0,512	0,551	
			309MM#36	14,00	15,00	0,551	0,591	

LOCKING RANGES WITH SHAFT20 (OPTION)

RANGE [MM]		RANGE [INCH]		JAWS	EXT.	SPRING	
MIN	MAX	MIN	MAX			NUMBER	QTY.
20	24	0,787	0,945	NS-0	-	SP-19	1
24	28	0,945	1,102	NS-1	-	SP-19	1
28	33	1,102	1,299	NS-2	-	SP-19	1
33	38	1,299	1,496	NS-3	-	SP-20	2
38	43	1,496	1,693	NS-4	-	SP-20	2
43	48	1,693	1,890	NS-5	-	SP-20	2

HYPERMILL 56


Powerful pneumatic tube facing, beveling and weld removal machine. The HyperMill 56 is a rugged, fast, portable weld end preparation lathe for various tubes and pipes, including stainless steel and other high chromium materials. A standard machine is equipped with a solid locking system to cover most common tube sizes.

STANDARD SET UP



SHAFT30

Self-align, heavy duty locking system. Shafts and jaws are longer and wider to ensure maximum clamping force.



135 MM (5,3")

The large cutter head, very sturdy and rigid, designed to fasten the wide range of cutting inserts.



Heavy duty locking system

STANDARD WORKING RANGE		TOTAL WORKING RANGE	
APPLICATION RANGE	LOCKING RANGE	APPLICATION RANGE	LOCKING RANGE
30 – 136 mm	30 – 136 mm	20 – 175 mm	20 – 166 mm
1,181 – 5,354"	0,181 – 4,354"	0,787 – 6,890"	0,787 – 6,535"
FEED STROKE		POWER	
40 mm	1,6"	1,3 hp	
FREE SPEED		TORQUE	
55 rpm		280 Nm	210 Ft.lbs
AIR USE		BODY WIDTH	
55 cfm	1,3 m ³ /min	3,22"	82 mm
BODY HEIGHT		BODY WEIGHT	
15"	385 mm	19 Lbs	9 kg

HYPERMILL 56E

HyperMill 56E is electric version of HyperMill 56. The machine can cover the same pipe sizes and comes with the same cutting head. The electric motor made by Makita with 3 stage planetary gear box made by KRAIS has variable speed control and produce enormous torque. Is interchangeable with pneumatic drive and can be purchased separately at any time.

Free Speed 58 RPM
 Power..... 750 W
 Torque 720 Nm (530 Ft.Lbs)
 Feed Stroke 40 mm (1,6")



EXAMPLE TOOL APPLICATION



OPTIONAL HEADS

116 MM (4,56")
The large cutter head, designed to fasten the wide range of cutting inserts.



175 MM (6,89")
Cutter head special for the largest machines, designed to fasten the wide range of cutting inserts.



HMRBMH
Head for membrane and overlay removal. Efficiently remove material between boiler tubes.
→ TABLE PAGE 114

OPTIONAL SHAFTS

SHAFT20
Self-align, heavy duty locking system. Shafts and jaws are longer and wider to ensure maximum clamping force.



SHAFT25
Self-align, heavy duty locking system. Shafts and jaws are longer and wider to ensure maximum clamping force.

OTHER OPTIONAL ACCESSORIES

HEAD FLANGE
Adapter to use all MiniMill's special cutter heads (from size 1-1/2" and up).



SPEED REDUCER
Easy to use gearbox for 3x speed reduction. Increases the torque, enabling the machine to generate a thick chip whilst reducing the cutting time.



RATCHET FEED
Feed system allowing to work in narrow and tight locations, eg. in water walls.

LOCKING RANGES WITH DEFAULT SHAFT30**STANDARD JAWS SET FOR DEFAULT SHAFT**

RANGE [MM]		RANGE [INCH]		JAWS	EXT.	SPRING	
MIN	MAX	MIN	MAX			NUMBER	QTY.
30,0	34,0	1,181	1,339	NS-1		SP-29	1
34,0	39,0	1,339	1,535	NS-2		SP-29	1
39,0	44,0	1,535	1,732	NS-3		SP-30	2
44,0	49,0	1,732	1,929	NS-4		SP-30	2
49,0	54,0	1,929	2,126	NS-5		SP-30	2
54,0	59,0	2,126	2,323	NS-6		SP-30	2
59,0	64,0	2,323	2,520	NS-7		SP-30	2
64,0	69,0	2,520	2,717	NS-8		SP-30	2
66,0	71,0	2,598	2,795	NS-5	NS-10	SP-30	2
71,0	76,0	2,795	2,992	NS-6	NS-10	SP-30	2
76,0	81,0	2,992	3,189	NS-7	NS-10	SP-30	2
81,0	86,0	3,189	3,386	NS-8	NS-10	SP-30	2
86,0	91,0	3,386	3,583	NS-5	NS-20	SP-30	2
91,0	96,0	3,583	3,780	NS-6	NS-20	SP-30	2
96,0	101,0	3,780	3,976	NS-7	NS-20	SP-30	2
101,0	106,0	3,976	4,173	NS-8	NS-20	SP-30	2
106,0	111,0	4,173	4,370	NS-5	NS-30	SP-30	2
111,0	116,0	4,370	4,567	NS-6	NS-30	SP-30	2
116,0	121,0	4,567	4,764	NS-7	NS-30	SP-30	2
121,0	126,0	4,764	4,961	NS-8	NS-30	SP-30	2
126,0	131,0	4,961	5,157	NS-5	NS-40	SP-30	2
131,0	136,0	5,157	5,354	NS-6	NS-40	SP-30	2

OPTIONAL JAWS FOR DEFAULT SHAFT

RANGE [MM]		RANGE [INCH]		JAWS	EXT.	SPRING	
MIN	MAX	MIN	MAX			NUMBER	QTY.
136,0	141,0	5,354	5,551	NS-7	NS-40	SP-30	2
141,0	146,0	5,551	5,748	NS-8	NS-40	SP-30	2
146,0	151,0	5,748	5,945	NS-5	NS-50	SP-30	2
151,0	156,0	5,945	6,142	NS-6	NS-50	SP-30	2
156,0	161,0	6,142	6,339	NS-7	NS-50	SP-30	2
161,0	166,0	6,339	6,535	NS-8	NS-50	SP-30	2

LOCKING RANGES WITH SHAFT25 (OPTION)

RANGE [MM]		RANGE [INCH]		JAWS	EXT.	SPRING	
MIN	MAX	MIN	MAX			NUMBER	QTY.
25,0	30,0	0,984	1,181	NS-1		SP-24	1
30,0	35,0	1,181	1,378	NS-2		SP-24	1
35,0	40,0	1,378	1,575	NS-3		SP-25	2
40,0	45,0	1,575	1,772	NS-4		SP-25	2
45,0	50,0	1,772	1,969	NS-5		SP-25	2
50,0	55,0	1,969	2,165	NS-6		SP-25	2
55,0	60,0	2,165	2,362	NS-7		SP-25	2
60,0	65,0	2,362	2,559	NS-8		SP-25	2
62,0	67,0	2,441	2,638	NS-5	NS-10	SP-25	2
67,0	72,0	2,638	2,835	NS-6	NS-10	SP-25	2
72,0	77,0	2,835	3,031	NS-7	NS-10	SP-25	2
77,0	82,0	3,031	3,228	NS-8	NS-10	SP-25	2
82,0	87,0	3,228	3,425	NS-5	NS-20	SP-25	2
87,0	92,0	3,425	3,622	NS-6	NS-20	SP-25	2
92,0	97,0	3,622	3,819	NS-7	NS-20	SP-25	2
97,0	102,0	3,819	4,016	NS-8	NS-20	SP-25	2

LOCKING RANGES WITH SHAFT20 (OPTION)

RANGE [MM]		RANGE [INCH]		JAWS	EXT.	SPRING	
MIN	MAX	MIN	MAX			NUMBER	QTY.
20,0	24,0	0,787	0,945	NS-0		SP-19	1
24,0	28,0	0,945	1,102	NS-1		SP-19	1
28,0	33,0	1,102	1,299	NS-2		SP-19	1
33,0	38,0	1,299	1,496	NS-3		SP-20	2

AUTO MINIMILL 101P


Auto MiniMill 101P is a fully automatic machine, controlled by a built-in, fully pneumatic control box, with adjustable feed rate and actuated by a hand button (foot switch optional). Ideal for repetitive work cycles on condensers and heat exchangers, as well as for bevelling and facing boiler tubes (100 Rpm configuration). AutoMiniMill 101P is specially designed for trimming and weld removal. This tool is based on the MiniMill 101; it is a fast facing and end preparation lathe designed for various tubes including stainless and other high chromium alloys. It works with all MiniMill 101 compatible cutter heads.

IMPORTANT!
Read how to properly lock on page 52

STANDARD SET UP



TFMH
Tube facing milling head for tubes made of any type of material. Utilizes 6% cobalt inserts.
→ TABLE PAGE 58

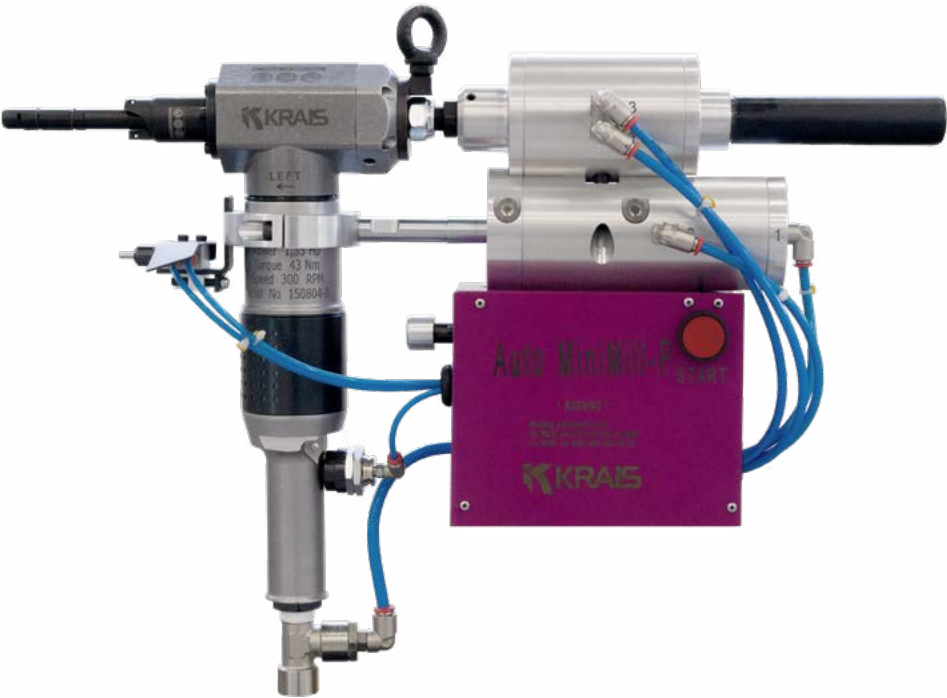

STANDARD WORKING RANGE				FEED STROKE	FREE SPEED	POWER	TORQUE
APPLICATION RANGE		LOCKING RANGE					
25 - 89 mm		25 - 77 mm		20 mm	100 Rpm	1,3 Hp	140 Nm
0,984 - 3,504"		0,984 - 3,031"		0,787"			105 Ft.Lbs
AIR USE		BODY WIDTH		BODY HEIGHT		BODY WEIGHT	
55 cfm	1,3 m³/min	2,32"	59 mm	13,1"	335 mm	25 Lbs	11,5 kg

EXAMPLE TOOL APPLICATION



AUTO MINIMILL 301P

Auto MiniMill 301P is a fully automatic machine, controlled by a built-in, fully pneumatic control box, with adjustable feed rate and actuated by a hand button (foot switch optional). Ideal for repetitive work cycles on condensers and heat exchangers, as well as for bevelling and facing boiler tubes (100 Rpm configuration). AutoMiniMill 301P is specially designed for trimming and weld removal. This tool is based on the MiniMill 301; it is a fast facing and end preparation lathe designed for various tubes including stainless and other high chromium alloys. It works with all MiniMill 301 compatible cutter heads.

IMPORTANT!

Read how to properly lock on page 52


STANDARD SET UP



TFMH


Tube facing milling head for tubes made of any type of material. Utilizes 6% cobalt inserts.

→ TABLE PAGE 58

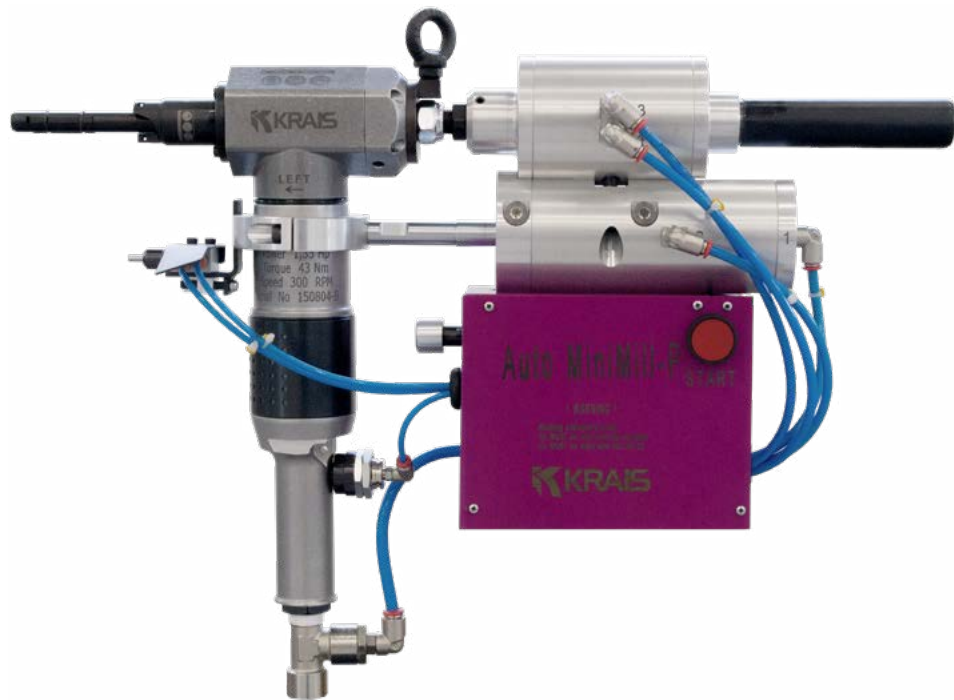

STANDARD WORKING RANGE				FEED STROKE	FREE SPEED	POWER	TORQUE
APPLICATION RANGE		LOCKING RANGE					
12,4 - 38,0 mm		12,4 - 24,0 mm		20 mm	300 Rpm	1,3 Hp	43 Nm
0,488 - 1,496"		0,488 - 0,945"		0,787"			32 Ft.Lbs
AIR USE		BODY WIDTH		BODY HEIGHT		BODY WEIGHT	
55 cfm	1,3 m³/min	2,32"	59 mm	13,1"	335 mm	25 Lbs	11,5 kg

EXAMPLE TOOL APPLICATION

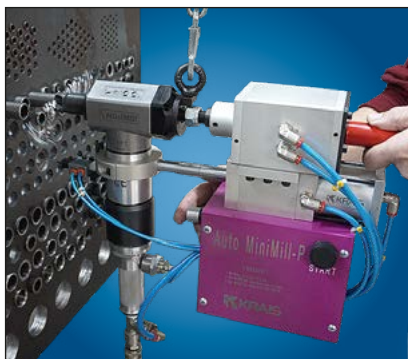

PANELMILL 65

The PanelMill attaches to the tube outside diameter by means of custom or specific clamp type jaws that provide strong clamping action that minimizes chatter and vibration. Rugged construction allows the tool's cutting blade to end prep quickly. Several cutter heads are available for tubes with up to 2-1/2" O.D. Both the clamp and cutter heads are extremely durable and easy to change.

The ratchet feed arm enables the operator to comfortably feed the tool during bevelling or facing. The PanelMill is suitable for small bore heavy wall tubes with a high percentage of chrome, stainless steel, and other exotic alloys. Standard and custom made blades are offered in a wide variety of angles and sizes.



	WORKING RANGE	CLEARANCE	CLADDING REMOVAL	MEMBRANE UP TO	FEED STROKE	FREE SPEED	TORQUE
PANELMILL 65EXT	19 - 63,5 mm	70 mm	44,4 mm	51,0 mm	25,4 mm	100 Rpm (Opc. 35, 200, 300)	140 Nm
	0,75 - 2,50"	2,75"	1,75"	2,0"	1,0"		105 Ft.Lbs
AIR USE		BODY WIDTH		BODY HEIGHT		WEIGHT	
55 cfm	1,3 m ³ /min	1,96"	50 mm	13,1"	300 mm	22 Lbs	10 kg

	WORKING RANGE	CLEARANCE	CLADDING REMOVAL	MEMBRANE UP TO	FEED STROKE	FREE SPEED	TORQUE
PANELMILL 65EXT-M	50 - 63,5 mm + 63,5 MEMBRANE	84 mm	63,5	63,5 mm	25,4 mm	100 Rpm (Opc. 35, 200, 300)	140 Nm
	0,75 - 2,50" + 2,50" MEMBRANE	3,3"	2,5"	2,5"	1,0"		105 Ft.Lbs
AIR USE		BODY WIDTH		BODY HEIGHT		WEIGHT	
55 cfm	1,3 m ³ /min	1,96"	50 mm	12,60"	320 mm	24 Lbs	11 kg

	WORKING RANGE	CLEARANCE	CLADDING REMOVAL	MEMBRANE UP TO	FEED STROKE	FREE SPEED	TORQUE
PANELMILL 101	50 - 101 mm	122 mm	88,9 mm	122 mm	25,4 mm	100 Rpm (Opc. 40)	140 Nm
	2 - 4"	4,8	3,5"	4,8"	1,0"		105 Ft.Lbs
AIR USE		BODY WIDTH		BODY HEIGHT		WEIGHT	
55 cfm	1,3 m ³ /min	1,96"	50 mm	13,77"	350 mm	40 Lbs	18 kg

UNIVERSAL CUTTER HEADS

50 MM (1,97")
Head supplied with PanelMill 63. Designed to fasten wide range of cutting inserts.



63 MM (2,48")
Head supplied with PanelMill 100. Designed to fasten wide range of cutting inserts.



BIT & HOLDERS
Universal cutter heads can hold a wide range of holders, with a bunch types of bits.
→ TABLE PAGE 120

OPTIONAL HEADS

OBPMH
Head for bevelling tubes without membranes in the boiler water walls.
→ TABLE PAGE 114



PMRBMH
Head for membrane and overlay removal. Efficiently remove material between boiler tubes.
→ TABLE PAGE 114

JAWS FOR PANELMILL

JAWS NO.	TUBE OD	
	[MM]	[INCH]
300 PM#2	19,05	0,750
301 PM#2	20,00	0,787
304 PM#2	22,20	0,874
308 PM#2	25,40	1,000
309 PM#2	25,00	0,984
312 PM#2	28,80	1,134
313 PM#2	30,00	1,181
314 PM#2	31,70	1,248
318 PM#2	34,90	1,374
322 PM#2	38,10	1,500
326 PM#2	44,40	1,748
330 PM#2	50,80	2,000
331 PM#2	51,00	2,008
334 PM#2	57,10	2,248
338 PM#2	60,30	2,374
342 PM#2	63,50	2,500
346 PM#2	76,20	3,000


PANELMILL-E

PanelMill E is electric version of PanelMill. A standard machine cover the same pipe sizes and comes with the same cutting head. The electric motor made by Makita with 3 stage planetary gear box made by KRAIS has variable speed control and produce enormous torque. Is interchangeable with pneumatic drive and can be purchased separately at any time.

Free Speed115 RPM
Power750 W
Torque366 NM (280 Ft.Lbs)
Feed Stroke20 mm (0,787")

**MACHINING IN EVERY POSITION****UNIVERSAL DRIVE PLACEMENT**

Adjustable drive position is a standard feature of this machine. No additional components are required.

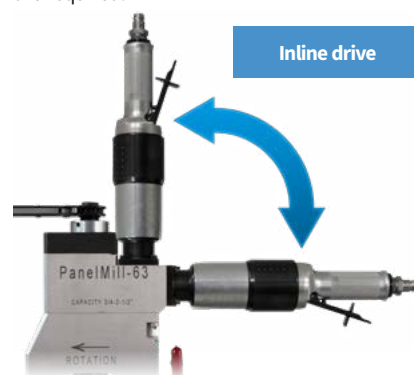

PANELDRILL


The KRAIS PanelDrill is a modular machine for the boiler waterwalls manufactures.

This is the first outside mounting tool with unique up to 80 mm feed stroke and 50 mm thick drive spindle.

Thanks to long feed stroke, rigid construction, powerful drives options and strong clamping PanelDrill is much more comfortable than other solutions. Minimized chatter and vibration results in smooth machining and operator convenience.

The PanelDrill is suitable for small bore, heavy wall tubes with a high percentage of chrome, stainless steel and other exotic alloys.

The machine is offered with a choice of one from 3 available clamping jaws: 2,5", 3" or 4" OD, other sizes are just on request.

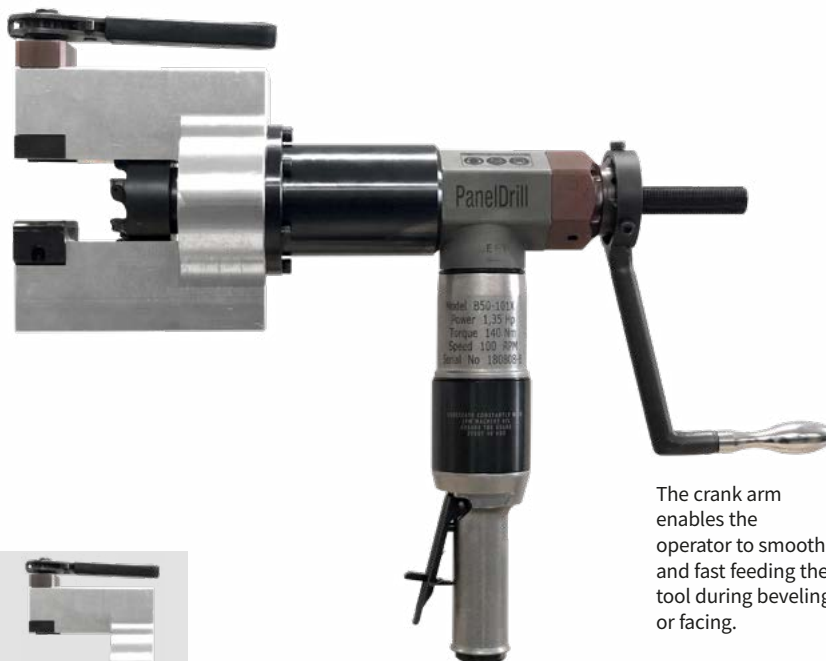

The crank arm enables the operator to smooth and fast feeding the tool during beveling or facing.

AVAILABLE CLAMPS



2,5" CLAMPS

Basic clamps allows for machining tubes with MiniDrill up to 2,5" with 2" feed range.



3" CLAMP

The mid 3" clamps increases MiniDrill capacity up to 76 mm (3") with 2" feed range.



4" CLAMP

The biggest, 4" clamps increases MiniDrill capacity up to 101 mm (4") with 2" feed range.

CLAMPS	WORKING RANGE	CLEARANCE	CLADDING REMOVAL	MEMBRANE UP TO	FEED STROKE	FREE SPEED	TORQUE
2,5"	19 - 63,5 mm	70 mm	44,4 mm	51,0 mm	50 mm	100 Rpm (Opt. 35, 200, 300)	140 Nm
	0,75 - 2,50"	2,75"	1,75"	2,0"	2,0"		105 Ft.Lbs
AIR USE		BODY WIDTH		BODY HEIGHT		WEIGHT	
55 cfm		1,3 m³/min		1,96"		50 mm	
				13,1"		300 mm	
						22 Lbs	
						10 kg	

CLAMPS	WORKING RANGE	CLEARANCE	CLADDING REMOVAL	MEMBRANE UP TO	FEED STROKE	FREE SPEED	TORQUE
3,0"	19 - 76 mm	84 mm	63,5	63,5 mm	50 mm	100 Rpm (Opt. 35, 200, 300)	140 Nm
	0,75 - 3,00"	3,3"	2,5"	2,5"	2,0"		105 Ft.Lbs
AIR USE		BODY WIDTH		BODY HEIGHT		WEIGHT	
55 cfm		1,3 m³/min		1,96"		50 mm	
				12,60"		320 mm	
						24 Lbs	
						11 kg	

CLAMPS	WORKING RANGE	CLEARANCE	CLADDING REMOVAL	MEMBRANE UP TO	FEED STROKE	FREE SPEED	TORQUE
4,0"	50 - 101 mm	122 mm	88,9 mm	122 mm	50 mm	100 Rpm (Optional 35 Rpm with Speed Reducer)	140 Nm
	2 - 4"	4,8	3,5"	4,8"	2,0"		105 Ft.Lbs
AIR USE		BODY WIDTH		BODY HEIGHT		WEIGHT	
55 cfm		1,3 m³/min		1,96"		50 mm	
				13,77"		350 mm	
						40 Lbs	
						18 kg	

UNIVERSAL CUTTER HEADS AND HOLDERS**50 MM**

Standard cutter head, delivered with 2,5" clamps, covers full range from 19 to 63,5 mm tubes.

**63 MM (2,48")**

Head supplied with 3" clamps. Designed to fasten wide range of cutting inserts.

**101 MM (3,97")**

Head supplied with biggest 4" clamps. Designed to fasten wide range of cutting inserts.

**BIT & HOLDERS**

Wide range of holders, with a standard and custom made blades are offered in a wide variety of angles and sizes.

→ TABLE PAGE 120

OPTIONAL LONG FEED SYSTEM

Special version of clamps and spindle with longer feed stroke. Depending on the application, there is a possibility to build machine with stroke even up to 80 mm. Please consult with factory if you have an application that needs even longer feed.

OTHER OPTIONAL**SPEED REDUCER**

Easy to use gearbox for 3x speed reduction. Increases the torque, enabling the machine to generate a thick chip whilst reducing the cutting time.

SPECIAL CUTTER HEADS**OBPMH**

Head for bevelling tubes without membranes in the boiler water walls.

→ TABLE PAGE 114

**PMRBMH**

Head for membrane and overlay removal. Efficiently remove material between boiler tubes.

→ TABLE PAGE 114

**CRH-PF**

Cladding removal head with carbide bits.

→ TABLE PAGE 115

PANELDRILL PERFORMANCE

PanelDrill during 2" carbon steel membrane removal.

CLAMPING JAWS FOR PANELDRILL

JAWS	TUBE OD	
	[MM]	[INCH]
300 PM#2	19,05	0,750
301 PM#2	20,00	0,787
304 PM#2	22,20	0,874
308 PM#2	25,40	1,000
309 PM#2	25,00	0,984
312 PM#2	28,80	1,134
313 PM#2	30,00	1,181
314 PM#2	31,70	1,248
318 PM#2	34,90	1,374
322 PM#2	38,10	1,500
326 PM#2	44,40	1,748
330 PM#2	50,80	2,000
331 PM#2	51,00	2,008
334 PM#2	57,10	2,248
338 PM#2	60,30	2,374
342 PM#2	63,50	2,500
346 PM#2	76,20	3,000
350 PM#2	88,90	3,500
400 PM#2	101,60	4,000

PANELDRILL-E

PanelDrill E is electric version of PanelDrill. A standard machine cover the same pipe sizes and comes with the same cutting head. The electric motor made by Makita with 3 stage planetary gear box made by KRAIS has variable speed control and produce enormous torque. Is interchangeable with pneumatic drive and can be purchased separately at any time.

Free Speed115 RPM
Power750 W
Torque366 NM (280 Ft.Lbs)



PANELMILL PF


The first one in the world! OD clamp pipe beveling machine with Positive Feed.

KRAIS PanelMill PF is the first machine where the beveling cycle time is not dependent on an operator efficiency but on the machine mechanism. Both, the feed mechanism and the spindle rotation mechanism are driven from one source. A fixed rate of spindle advancement is achieved for each rotation of the spindle so every stroke cycle is predictable.

The standard machine has 35 mm feed stroke (longer ones are available as option).


PanelMill PF – positive feed beveling machine, is highly recommended for tube end facing, beveling, and membrane milling in water wall panels. As well as for the tube end preparation in the boiler and heat exchanger industry and FAB shops.

STANDARD SET UP



CUTTER HEAD 66 MM

Cutter head thanks to special way of fixing with spindle can cover full range from 0 to 76 mm



3" CLAMPS

Standard machine clamps allows for machining tubes up to 3" with 35 mm positive feed range.



35 MM SPINDLE

Heavy duty 35 mm (1-3/8") diameter spindle. The best stability and rigidity available on the market within this machine sizes!



STANDARD WORKING RANGE			OPTIONAL WORKING RANGE		
APPLICATION	FEED STROKE	FEED PER REV.	APPLICATION	FEED STROKE	FEED PER REV.
19,05 - 76,20 mm	35 mm	0,1 mm	51 - 114 mm	35 mm	0,1 mm
0,75 - 3,00"	1,377"	0,003"	2,00 - 4,50"	1,377"	0,003"
POWER	FREE SPEED	TORQUE	POWER	FREE SPEED	TORQUE
2,2 hp	125 Rpm	300 Nm	2,2 Hp	100 Rpm	360 Nm

STANDARD CLAMPING JAWS

JAWS NO.	TUBE OD	
	[MM]	[INCH]
308 PM#2	25,40	1,000
314 PM#2	31,70	1,248
322 PM#2	38,10	1,500
330 PM#2	50,80	2,000
342 PM#2	63,50	2,500
346 PM#2	76,20	3,000

OPTIONAL CLAMPING JAWS

JAWS NO.	TUBE OD	
	[MM]	[INCH]
300 PM#2	19,05	0,750
301 PM#2	20,00	0,787
304 PM#2	22,20	0,874
309 PM#2	25,00	0,984
312 PM#2	28,80	1,134
313 PM#2	30,00	1,181
318 PM#2	34,90	1,374
326 PM#2	44,40	1,748
331 PM#2	51,00	2,008
334 PM#2	57,10	2,248
338 PM#2	60,30	2,374


PANELMILL PF-E

PanelMill PF can be driven by electric motor. Thus equipped machine covers the same working range but gets much more mobility. We offer two drives with different free speed. Both of them are run by Makita motor and use planetary gear Box's made by KRAIS . It has variable speed control and produce enormous torque. Electric drives are interchangeable with pneumatic one and can be purchased separately at any time.

PanelMill Size	3"	4,5"
Type:	ED600	ED240
Free speed:	220 Rpm	110 Rpm
Power:	750W	1500 W
Torque:	360 Nm	420 Nm
Gearbox:	2-stage	3-stage



OPTIONAL PARTS AND ACCESSORIES



4,5" CLAMP

The bigger 4,5" clamp to increase PanelMill PF capacity up to 114 mm (4,5"). With this clamp the machine covers tube range from 51 to 114 mm (2-4,5").



LONG FEED STROKE

Special version of clamps and sindle with longer feed stroke. Depending on the application, there is a possibility to build machine with stroke even up to 4". Please consult with factory if you have an application that needs even longer feed.



BENCH MOUNT PLATE (BMP)

PanelMill-PF is not the only portable tool for on site applications. Thanks to bench mount plate, it is possible to attach it to the table/worktop. A table base allows you to convert PanelMill-PF to a table machine for bevelling pipes, stubs or elbows. This is only available for 4,5" clamp only.

TWO VARIANTS



RIGHT-ANGLE AND IN-LINE


PanelMill-PF is available in two versions: right angle and in-line. Depending on application and preferences you can choose the version, which suits better for your needs. Both models have exactly the same parameters.

UNIVERSAL CUTTER HEADS



PMH-PF-66 66 MM (2,598")

Head supplied with PanelMill 3". Designed to fasten wide range of cutting inserts.



PMH-PF-99 99 MM (3,897")

Head supplied with PanelMill 4,5". Designed to fasten wide range of cutting inserts.



BIT & HOLDERS

Universal cutter heads can hold a wide range of holders, with a bunch types of bits.

→ TABLE PAGE 120

SPECIALIZED CUTTER HEADS



PRRMBH-PF

Membrane removal and overlay head with carbide bits.

→ TABLE PAGE 115



CRH-PF

Cladding removal head with carbide bits.

→ TABLE PAGE 115



OBPMH-PF

Outside bevelling head (37,5") for tubes without membranes, with HSS 6% cobalt bits.

→ TABLE PAGE 115

PANELMILL PF PERFORMANCE



Facing/beveling application



Membrane removal application on 1" length



Inconel cladding removal application on 1" length

SMARTMILL-8

Most powerful machine within this size range on the market today. Utilizes a powerful 2.2 kW (3 HP) pneumatic motor that is entirely engineered and manufactured by KRAIS. SmartMill-8 has a unique construction that has been specifically designed for the largest end prep systems.

- » Self-centering 40 mm (1,57") one piece locking shaft.
- » Only one mandrel and 6 Jaw sets needed to cover machines entire range.
- » Wide clamps produce superior clamping force for chatter free end preps.
- » Fully portable for on-site and Fab-shop work.

SmartMill-8 is available for sale or rent.



STANDARD WORKING RANGE		FEED STROKE	FREE SPEED	POWER	TORQUE		
APPLICATION RANGE	LOCKING RANGE						
40 - 219 mm	40 - 203,5 mm	50 mm	39 Rpm	3,0 hp	930 Nm		
1,574 - 8,622"	1,574 - 8,012"	2"			697 Ft.Lbs		
AIR USE		AIR PRESSURE		BODY DIMENSIONS		BODY WEIGHT	
75 cfm	2,2 m³/min	90 PSI	6,2 Bar	22 x 9,25 x 7,48"	560 x 235 x 190 mm	46 Lbs	21 kg

LOCKING RANGES WITH STANDARD JAWS**JAWS: SM-7**

RANGE [MM]		RANGE [INCH]		SEGMENTS		
MIN	MAX	MIN	MAX	SM-42-0	SM-42-1	ML-42-A
40,0	55,0	1,575	2,165	SM-42-0		
55,0	69,5	2,165	2,736		SM-42-1	
69,5	84,0	2,736	3,307		SM-42-1	ML-42-A-75
84,0	98,5	3,307	3,878		SM-42-1	ML-42-A-150
98,5	113,5	3,878	4,469		SM-42-1	ML-42-A-225
113,5	128,5	4,469	5,059		SM-42-1	ML-42-A-300
128,5	143,5	5,059	5,650		SM-42-1	ML-42-A-300 ML-42-A-75
143,5	158,5	5,650	6,240		SM-42-1	ML-42-A-300 ML-42-A-150
158,5	173,5	6,240	6,831		SM-42-1	ML-42-A-300 ML-42-A-225
173,5	188,5	6,831	7,421		SM-42-1	ML-42-A-300 ML-42-A-225 ML-42-A-75
188,5	203,5	7,421	8,012		SM-42-1	ML-42-A-300 ML-42-A-225 ML-42-A-150

OPTIONAL RIGHTANGLE CONFIGURATION

The SmartMill 8 drive can be easily converted into right angle version. It can be achieved thanks to special Rightangle Head, mounted in few minutes between regular drive and machine. The option can be helpful where is not enough space for the in-line version.

SMARTMILL-8 PERFORMANCE

The performance of the machine may vary depending on the skill of the operator, the materials, the conditions of the tools and the air supply system in case of pneumatic unit.

ADVANTAGES OF SMARTMILL-8**UNIQUE SHAFT DESIGN**

40 mm (1,57") shaft, assures rigidity when machining heavy wall pipe. Only 6 set of jaws needed to cover the full locking range.

**POWERFUL MOTOR UNIT**

SmartMill-8 is powered by powerful and efficient drives dedicated for our Lathe series beveling machines. 39 rpm and 930 Nm (697 Ft.Lbs) torque on the cutter blade is a standard feature.

**LIGHTWEIGHT AND PORTABLE**

The innovative design made it possible to produce lightweight and portable machine. Small weight of SmartMill-8 allows for fatigue-free operation in all conditions.

**HEAVY DUTY HANDLE**

Machine is equipped with a solid and convenient aluminium handle.

OPTIONALS**RIGHT ANGLE HEAD**

This right angle head allows for fastening drive in alternate positions. The useful option in tight spaces.

**30 MM SHAFT**

Optional shaft to enable the machine to be used for smaller tubes. The shaft is supplied with complete jaws set to cover up to 2" ID.

OPTIONAL ELECTRIC MOTOR UNIT

SmartMill-8E is electric version of SmartMill-8. The machine can cover the same pipe sizes and comes with the same cutting head. The electric motor with 4 speed mechanical gear box has also variable speed control and produce enormous torque on the cutter blade. Is interchangeable with pneumatic drive and can be purchased separately at any time. Take 5 min to replace from pneumatic to electric.

**DUDE-2000-4-SPEED**

Motor free speed: 120-210-380-650 RPM

Motor power: 2000 Watt

Motor torque (on the 1st gear): 240 Nm (180 Ft.Lbs)

Machine feed stroke: 50 mm (2")


Cutter head speed: 8-14-25-43 rpm

Max torque on cutter blade (on the 1st gear): 3600 Nm (2664 Ft.Lbs)

PIPEMILL

PipeMill is a pneumatic powered tube facing, bevelling and weld removal machine. The PipeMill is a rugged, fast and powerful weld end preparation lathe for various pipes including stainless steel and other exotic alloys. A standard machine is equipped with a locking system to cover sizes of 50,8 to 172 mm ID (2.000" to 6.800") with a 250 mm cutting head.

STANDARD SET UP



250 MM (9,8")

Cutter head special for the largest machines. Very rigid. Designed to fasten the wide range of cutting inserts.



STANDARD WORKING RANGE				OPTIONAL WORKING RANGE			
APPLICATION RANGE		LOCKING RANGE		APPLICATION RANGE		LOCKING RANGE	
50 – 279 mm		50 – 319 mm		50 – 319 mm		50 – 319 mm	
1,968 – 10,984”		1,968 – 12,559”		1,968 – 12,559”		1,968 – 12,559”	
FEED STROKE		POWER		FREE SPEED		TORQUE	
50 mm	1,968”	1,3 hp		Depends on gear			
AIR USE		BODY WIDTH		BODY HEIGHT		BODY WEIGHT	
70 cfm	2,2 m³/min	5,7”	145 mm	21,5”	550 mm	52,9 Lbs	24 kg

LOCKING RANGES WITH STANDARD JAWS

JAWS: SM-42

RANGE [MM]		RANGE [INCH]		EXTENSIONS		
MIN	MAX	MIN	MAX	A	B	C
50,0	65,0	1,969	2,559			
65,0	80,0	2,559	3,150	ML-42-A-75		
80,0	95,0	3,150	3,740	ML-42-A-150		
95,0	110,0	3,740	4,331	ML-42-A-225		
110,0	125,0	4,331	4,921	ML-42-A-300		
125,0	140,0	4,921	5,512	ML-42-A-375		
140,0	155,0	5,512	6,102			SML-42-C
155,0	170,0	6,102	6,693	ML-42-A-75		SML-42-C
170,0	184,5	6,693	7,264	ML-42-A-150		SML-42-C
184,5	199,0	7,264	7,835	ML-42-A-225		SML-42-C
199,0	214,0	7,835	8,425	ML-42-A-300		SML-42-C
214,0	229,0	8,425	9,016	ML-42-A-375		SML-42-C
229,0	244,5	9,016	9,626		ML-42-B	SML-42-C
244,5	259,5	9,626	10,217	ML-42-A-75	ML-42-B	SML-42-C
259,5	274,0	10,217	10,787	ML-42-A-150	ML-42-B	SML-42-C
274,0	289,0	10,787	11,378	ML-42-A-225	ML-42-B	SML-42-C
289,0	304,0	11,378	11,969	ML-42-A-300	ML-42-B	SML-42-C
304,0	319,0	11,969	12,559	ML-42-A-375	ML-42-B	SML-42-C

AVAILABLE GEARBOX CONFIGURATIONS

This tool comes with one chosen gearbox as a standard. Torque/speed depends on gear configuration:

GEARBOX 15	15 RPM	2544 Nm	1908 Ft.Lbs
GEARBOX 20	20 RPM	1883 Nm	1415 Ft.Lbs
GEARBOX 28	28 RPM	1290 Nm	969 Ft.Lbs
GEARBOX 37	37 RPM	971 Nm	730 Ft.Lbs

OPTIONAL HEADS AND CUTTERS


290 MM (11,4'')
Biggest head for KRAIS Mini&HyperMill tools. Very rigid. Designed to fasten the wide range of cutting inserts.




OB-45-37
Holder for outside tube beveling.



IB-45-37
Holder for inside tube beveling.



F-45-90
Holder for tube end facing ..

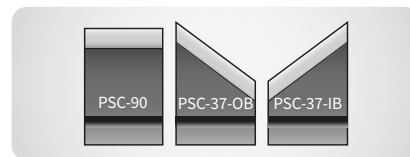


CUTTERS SET
Cutters made of HSS with 6% cobalt, for use without additional holders.

PIPEMILL-E - ELECTRIC VERSION

PipeMill-E is electric version of PipeMill. The machine can cover the same pipe sizes and comes with the same cutting head. The electric motor with 4 speed mechanical gear box has also variable speed control and produce enormous torque on the cutter blade. Is interchangeable with pneumatic drive and can be purchased separately at any time. Take 5 min to replace from pneumatic to electric.

DUDE-2000-4-SPEED
Motor free speed.....120-210-380-650 RPM
Motor power.....2000 W
Motor torque (on the 1st gear).....240 Nm (180 Ft.Lbs)
Machine feed stroke40 mm (1,6'')
Cutter head speed10-17-30-50 rpm
Max torque on cutter blade (on the 1st gear)3096 Nm (2290 Ft.Lbs)

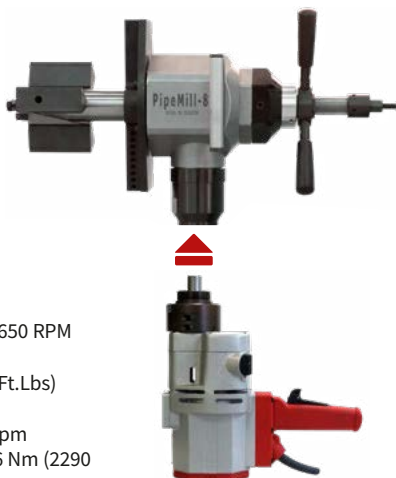**EXAMPLE TOOL APPLICATION**

PIPE 10"
SCHEDULE 120



PIPE 8"
SCHEDULE 160



MINILATHE

- Most powerful machine within this size range on the market today. Utilises a powerful 2.2kW (3 HP) pneumatic motor that is entirely engineered and manufactured by KRAIS for the largest end prep systems.
- MiniLathe comes with one of 3 gearboxes as a standard. It gives a wide choice for operator. No need for extra gearbox that reduces the RPM and multiplies the torque - it comes as standard!
- Innovative 6 point locking system assures maximum stability during all machining operations.
- Self-centering 2,75" one piece locking shaft with build in jaws, eliminates the issue of broken or loosening retaining springs and o-rings.
- Only one mandrel and 10 Jaw sets needed to cover machines entire range.
- Wide clamps produce superior clamping force for chatter free end preps.
- Fully portable for on-site and Fab-shop work.
- Available for sale or rent.



STANDARD WORKING RANGE		FEED STROKE	POWER	FREE SPEED	TORQUE		
APPLICATION RANGE	LOCKING RANGE (ID)						
72 - 406 mm	70 - 400 mm	50 mm	3,0 Hp	DEPENDS ON GEARBOX			
2,800 - 16,000"	2,755 - 15,700"	2"					
AIR USE		AIR PRESSURE		BODY DIMENSIONS		BODY WEIGHT	
70 cfm	2,2 m³/min	90 PSI	6,2 Bar	25 x 13 x 12"	640 x 330 x 300 mm	75 Lbs	35 kg

LOCKING RANGES WITH STANDARD JAWS

JAWS: ML-42

RANGE [MM]		RANGE [INCH]		SEGMENT		
MIN	MAX	MIN	MAX	A	B	C
70	85	2,756	3,346			
85	100	3,346	3,937	ML-42-A-75		
100	115	3,937	4,528	ML-42-A-150		
115	130	4,528	5,118	ML-42-A-225		
130	145	5,118	5,709	ML-42-A-300		
145	160	5,709	6,299	ML-42-A-375		
160	175	6,299	6,890			ML-42-C
175	190	6,890	7,480	ML-42-A-75		ML-42-C
190	205	7,480	8,071	ML-42-A-150		ML-42-C
205	220	8,071	8,661	ML-42-A-225		ML-42-C
220	235	8,661	9,252	ML-42-A-300		ML-42-C
235	250	9,252	9,843	ML-42-A-375		ML-42-C
250	265	9,843	10,433		ML-42-B	ML-42-C
265	280	10,433	11,024	ML-42-A-75	ML-42-B	ML-42-C
280	295	11,024	11,614	ML-42-A-150	ML-42-B	ML-42-C
295	310	11,614	12,205	ML-42-A-225	ML-42-B	ML-42-C
310	325	12,205	12,795	ML-42-A-300	ML-42-B	ML-42-C
325	340	12,795	13,386	ML-42-A-375	ML-42-B	ML-42-C
340	355	13,386	13,976	ML-42-A-300 ML-42-A-150	ML-42-B	ML-42-C
355	370	13,976	14,567	ML-42-A-300 ML-42-A-225	ML-42-B	ML-42-C
370	385	14,567	15,157	ML-42-A-375 ML-42-A-225	ML-42-B	ML-42-C
385	400	15,157	15,748	ML-42-A-375 ML-42-A-300	ML-42-B	ML-42-C


AVAILABLE GEARBOX

This tool comes with one of 3 gearboxes as a standard. Torque/speed depends on gear configuration.

GEARBOX 11	11 RPM	3850 Nm	2840 Ft.Lbs
GEARBOX 15	15 RPM	2615 Nm	1960 Ft.Lbs
GEARBOX 21	21 RPM	1770 Nm	1327 Ft.Lbs

AVAILABLE HOLDERS

Facing (2CDI insert)	Inside beveling and boring (2CDI insert)	Outside beveling (2CDI insert)	J beveling (2CDJ-Rxx insert)	Compound Beveling (CB-45 insert)
F-45-90	IB-45-37 IB-45-10	OB-45-45 OB-45-37 OB-45-30 OB-45-10	JP-45-45 JP-45-37 JP-45-30	CB-10/37 (others on request)

ADVANTAGES OF MINILATHE**6 POINT LOCKING JAWS**

150 mm (5,9") shaft, assures rigidity when machining heavy wall pipe. The jaws are fully contained within the shaft with no need for retaining springs or O-rings that easily brake or get lost.

**POWERFUL MOTOR UNIT**

Powerful and efficient drives dedicated for our Lathe series beveling machines. 11 rpm and 3850 Nm (2840 Ft.Lbs) torque on the cutter blade is a standard feature.

**HEAVY DUTY PENDANT**

Machine is equipped with a heavy duty pendant. This can be attached to both sides of the motor for operator convenience.

OTHER ACCESSORIES**SLIDE BEARING**

As an option we can supply a bronze slide bearing that delivers more stability and rigidity while machining a very hard materials and heavy wall pipes.

**DUDE-2000-4-SPEED**

For thin wall application (up to 1" / 25,4 mm) is an electric motor DUDE-2000-4-SPEED, which offers 4 speed: 120-210-380-650 RPM

**PDE MOTOR**

The PipeLathe can also be supplied as an electric version, with a 3200 Watt heavy duty motor.

**PDH MOTOR**

Optional super strong hydraulic motor. Constructed on the basis of a small hydraulic motor and multistage planetary gear box. HyperLathe version generates 11 rpm and up to 8200 Nm (6050 Ft.Lbs) torque on cutter blade at constant cutting speed.

EXAMPLE TOOL APPLICATION

In order to facilitate the assembly of the machine in the pipe, the machine optionally can be equipped with a double-sided yoke with removable extensions so that two people can freely install into the processed pipe.

PIPELATHE

- Powerful 3.5 HP pneumatic drive generating 12500 Nm (9259 ft.lbs) torque on the cutter blade. Variable speed control 0-5 rpm.
- No need for extra gear box that reduces the rpm and multiplies the torque. It comes as standard!
- 150 mm (5,9") One piece locking shaft with build in jaws, eliminates the issue of broken or loosening retaining springs and o-rings.
- One mandrel covers complete working range.
- Innovative 6 point locking system assures maximum stability during all machining operations.
- Only one mandrel and 6 Jaw sets needed to cover machines entire range.
- Self-centering shaft with build in jaws.
- Wide Clamps produce superior clamping force for chatter free end preps.
- Fully portable for on-site and Fab-shop work.
- Available for sale or rent.








STANDARD WORKING RANGE		FEED STROKE	POWER	FREE SPEED	TORQUE		
APPLICATION RANGE	LOCKING RANGE						
180 - 609 mm	175 - 600 mm	60 mm	3,5 hp	5 Rpm	12500 Nm		
7,0 - 24,0"	6,889 - 23,6"	2,4"			9219 Ft.lbs		
AIR USE		AIR PRESSURE		BODY DIMENSIONS		BODY WEIGHT	
85 cfm	2,8 m³/min	90 PSI	6,2 Bar	38 x 22 x 22"	950 x 550 x 500 mm	495 Lbs	225 kg

LOCKING RANGES WITH STANDARD JAWS

JAWS: PL-42

RANGE [MM]		RANGE [INCH]		SEGMENT		
MIN	MAX	MIN	MAX	A	B	C
175,0	200,0	6,890	7,874			
200,0	225,0	7,874	8,858	PL-42-A-125		
225,0	250,0	8,858	9,843	PL-42-A-250		
250,0	275,0	9,843	10,827	PL-42-A-375		
275,0	300,0	10,827	11,811	PL-42-A-500		
300,0	325,0	11,811	12,795	PL-42-A-500 PL-42-A-125		
325,0	350,0	12,795	13,780	PL-42-A-500 PL-42-A-250		
350,0	375,0	13,780	14,764		PL-42-B	
375,0	400,0	14,764	15,748	PL-42-A-125	PL-42-B	
400,0	425,0	15,748	16,732	PL-42-A-250	PL-42-B	
425,0	450,0	16,732	17,717	PL-42-A-375	PL-42-B	
450,0	475,0	17,717	18,701	PL-42-A-500	PL-42-B	
475,0	500,0	18,701	19,685			PL-42-C
500,0	525,0	19,685	20,669	PL-42-A-125		PL-42-C
525,0	550,0	20,669	21,654	PL-42-A-250		PL-42-C
550,0	575,0	21,654	22,638	PL-42-A-375		PL-42-C
575,0	600,0	22,638	23,622	PL-42-A-500		PL-42-C

AVAILABLE HOLDERS

Facing (2CDI insert)	Inside beveling and boring (2CDI insert)	Outside beveling (2CDI insert)	J beveling (2CDJ-Rxx insert)	Compound Beveling (CB-45 insert)
F-45-90	IB-45-37 IB-45-10	OB-45-45 OB-45-37 OB-45-30 OB-45-10	JP-45-45 JP-45-37 JP-45-30	CB-10/37 (others on request)
				

ADVANTAGES OF HYPERLATHE




HEAVY DUTY DESIGN

All the Lathe series machine design is based on long steel spindle which assure maximum rigidity because the locking shaft is fully mounted into that spindle instead partially into the main aluminium body what is causing adverse vibration due to a lot of tension on it.



POWERFUL MOTOR UNIT

Powerful and efficient drive dedicated for our Lathe series beveling machines. 0-5 rpm and 12500 Nm (9219 ft.lbs) torque on the cutter blade is a standard feature.



6 POINT LOCKING JAWS

150 mm (5,9") shaft, assures rigidity when machining heavy wall pipe. The jaws are fully contained within the shaft with no need for retaining springs or O-rings that easily brake or get lost.



HEAVY DUTY PENDANT

Machine is equipped with a heavy duty pendant. This can be attached to both sides of the motor for operator convenience.

OPTIONAL MOTOR UNITS



MOTOR PDE

The PipeLathe can also be supplied as an electric version, with a 3200 Watt heavy duty motor.



MOTOR PDH

Optional super strong hydraulic motor. Constructed on the basis of a small hydraulic motor and multistage planetary gear box. PipeLathe version generates 6 rpm and up to 14200 Nm (10475 Ft.Lbs) torque on cutter blade at constant cutting speed.

EASY CONVERSION TO PIPELATHE 40

Due to high torque of our PipeLathe hydraulic drive we offer special extension kit for regular PipeLathe machine to increase working range up to 40" OD pipe. See next page for more info.




EXAMPLE TOOL APPLICATION



PipeLathe is the strongest machine from all KRAIS Lathe tools. It allows for machining tubes up to 24" (600 mm) OD.

PIPELATHE 40

- Powerful hydraulic drive generating 14500 Nm (10800 ft.lbs) torque on the cutter blade. Variable speed control 0-5 rpm.
- No need for extra gear box that reduces the rpm and multiplies the torque. It comes as standard!
- 150 mm (5,9") locking shaft with build in jaws, eliminates the issue of broken or loosening retaining springs and o-rings.
- Innovative 6 point locking system with wide clamps assures maximum stability during machining.
- Only one mandrel and 6 Jaws set covers entire working range.
- Fully portable for on-site and Fab-shop work.
- Available for sale or rent.

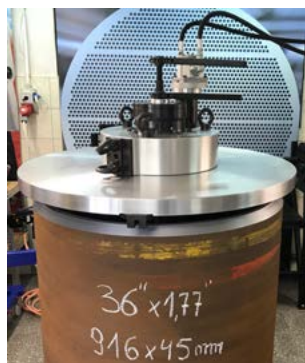

STANDARD WORKING RANGE		FEED STROKE	POWER	FREE SPEED	TORQUE		
APPLICATION RANGE	LOCKING RANGE						
180 - 1016 mm	175 - 972 mm	60 mm	3,5 hp	5 Rpm	12500 Nm		
7,0 - 40,0"	6,9 - 38,3"	2,4"			9219 Ft.lbs		
AIR USE		AIR PRESSURE		BODY DIMENSIONS		BODY WEIGHT	
85 cfm	2,8 m³/min	90 PSI	6,2 Bar	38 x 22 x 22"	950 x 550 x 500 mm	495 Lbs	225 kg

LOCKING RANGES WITH STANDARD JAWS

JAWS: PL-42

RANGE [MM]		RANGE [INCH]		SEGMENT				
MIN	MAX	MIN	MAX	A	B	C	D	E
175	200	6,9	7,9					
200	225	7,9	8,9	PL-42-A-125				
225	250	8,9	9,8	PL-42-A-250				
250	275	9,8	10,8	PL-42-A-375				
275	300	10,8	11,8	PL-42-A-500				
300	325	11,8	12,8	PL-42-A-500 PL-42-A-125				
325	350	12,8	13,8	PL-42-A-500 PL-42-A-250				
350	375	13,8	14,8		PL-42-B			
375	400	14,8	15,7	PL-42-A-125	PL-42-B			
400	425	15,7	16,7	PL-42-A-250	PL-42-B			
425	450	16,7	17,7	PL-42-A-375	PL-42-B			
450	475	17,7	18,7	PL-42-A-500	PL-42-B			
475	500	18,7	19,7			PL-42-C		
500	525	19,7	20,7	PL-42-A-125		PL-42-C		
525	550	20,7	21,7	PL-42-A-250		PL-42-C		
550	575	21,7	22,6	PL-42-A-375		PL-42-C		
575	600	22,6	23,6	PL-42-A-500		PL-42-C		
593	622	23,3	24,5	PL-42-A-500 PL-42-A-125		PL-42-C		

RANGE [MM]		RANGE [INCH]		SEGMENT				
MIN	MAX	MIN	MAX	A	B	C	D	E
621	647	24,4	25,5	PL-42-A-500 PL-42-A-250		PL-42-C		
646	671	25,4	26,4	PL-42-A-500 PL-42-A-375		PL-42-C		
667	693	26,3	27,3			PL-42-C	PL-42-D	
692	716	27,2	28,2	PL-42-A-125		PL-42-C	PL-42-D	
715	739	28,1	29,1	PL-42-A-250		PL-42-C	PL-42-D	
738	762	29,1	30,0	PL-42-A-375		PL-42-C	PL-42-D	
761	786	30,0	30,9	PL-42-A-500		PL-42-C	PL-42-D	
787	811	31,0	31,9			PL-42-C		PL-42-E
810	834	31,9	32,8	PL-42-A-125		PL-42-C		PL-42-E
833	856	32,8	33,7	PL-42-A-250		PL-42-C		PL-42-E
856	879	33,7	34,6	PL-42-A-375		PL-42-C		PL-42-E
878	903	34,6	35,6	PL-42-A-500		PL-42-C		PL-42-E
902	925	35,5	36,4	PL-42-A-500 PL-42-A-125		PL-42-C		PL-42-E
924	949	36,4	37,4	PL-42-A-500 PL-42-A-250		PL-42-C		PL-42-E
948	972	37,3	38,3	PL-42-A-500 PL-42-A-375				PL-42-E

MINIDRILL

MiniDrill is a unique machining platform designed to safely perform multiple machining operations on heat exchangers, boilers and similar thermal exchange equipment. Designed with operator safety in mind, this system can drill, ream, bore and even re-machine serrations in steam drums quickly and safely. With a 80 mm (3.150") travel, this tool is ideally suited for the majority of plant equipment. The system is fully torque reacted with 2 clamping arms that are independent of one another and can accommodate most pitch configurations. Once locked into the tubes, the MiniDrill is extremely stable.



AVAILABLE TOOLS WORKING WITH MINIDRILL



WALL REDUCING

Tube wall reducing head with carbide inserts.



DRILLING

Drill for machining holes in tube plugs before removing them with our special plug removal tool.



REAMMING

Safely ream tube sheets.



BORING HEAD

Boring head to machine heavy wall boiler tubes, safely and efficiently prior to collapsing through the drum.



OTHER AVAILABLE ACCESSORIES

MINIDRILL WITH FAST CLAMPING

MiniDrill with the fast pneumatic clamping system is ideal for manufacturing plants that make large amounts of work on tubes and pipes. It offers rapid tube to tube cycle time, increased productivity with little operator fatigue.



EXAMPLE TOOL APPLICATION



Reducing tube wall on a 6" thick tube sheet prior to punching.

MINIDRILL FOR FINFAN APPLICATION

MiniDrill FinFan is a unique machining platform designed to safely perform the repair or increase the FinFan Cooler plug thread and other operations on heat exchangers, boilers and similar thermal exchange equipment. Designed with operator safety in mind, this system can drill, ream, bore and even re-machine serrations in steam drums quickly and safely. With a 80 mm (3.150") travel, this tool is ideally suited for the majority of plant equipment. The system is fully torque reacted with 2 clamping arms that are independent of one another and can accommodate most pitch configurations. Once locked into the tubes, the MiniDrill is extremely stable.



WORKING RANGE	LOCKING RANGE	FREE SPEED	POWER	TORQUE			
12,5– 51,0 mm	According to the drawing	100 Rpm	1,3 Hp	140 Nm			
0,492 – 2,000"				105 Ft.Lbs			
AIR USE		BODY WIDTH		BODY HEIGHT		BODY WEIGHT	
55 cfm	1,3 m3/min	2,32"	59 mm	13,1"	335 mm	17,5 Lbs	8 kg

RIGID LOCKING



On standard FinFan gas coolers machine locks onto two shafts on the adjacent holes. The locking plate is manufactured according to the tube hole pitch to ensure precise tool alignment.

UNIVERSAL REACTION PLATE




MiniDrill FinFan is delivered with locking plate and 2 reaction shafts. Universal construction of the plate allows for locking machine with both shafts on one side to allow to machine the last holes in the row. Plate can be rotated through 180 degrees to accommodate partition plates, channel heads etc.

CUSTOM JAWS



Jaws are the with thread shape for safe locking and prevent the the existing thread.

ALL MACHINING TOOLS



Drill for machining holes in tube plugs before removing them with KRAIS special plug removal tool.



Head for chamfering before threading.



Taps with manual ratchet handle.

MINIMILL 300FF

A standard machine for Fin Fan cooler tube trimming is equipped with custom head and locking system to suit your application (customer to provide drawing of unit). The MiniMill 300FF cutter heads have 3 carbide inserts with 4 Cutting edges each.

STANDARD SET UP**FINFAN ATTACHMENT**

Special attachment for facing tubes in fin fan gas coolers. A locking shaft with adjustable length and a support bushing are screwed into the plug thread, making this tool the best one available on the market today. The cycle is approx. 1 min from tube to tube. For this application we recommend our 300 Rpm machine



STANDARD WORKING RANGE				FEED STROKE	FREE SPEED	POWER	TORQUE
APPLICATION RANGE (ID-OD)		LOCKING RANGE (ID)					
12,5– 51,0 mm		According to the drawing		20 mm	300 Rpm	1,3 Hp	43 Nm
0,492 – 2,000"				0,787"			32 Ft.Lbs
AIR USE		BODY WIDTH		BODY HEIGHT		BODY WEIGHT	
55 cfm	1,3 m³/min	2,32"	59 mm	13,1"	335 mm	13,2Lbs	6 kg


FINFAN ATTACHMENT PART NUMBERS

FINFAN	TUBE CAPACITY (OD)			INSERT	NO. INSERTS	SCREW	JAWS COVER	
	[INCH]	[MM]	BWG				MIN	MAX
601-FinFan-1-12"	1,000	25,40	12-23	CI	3	1-1/8	207MM#36	213MM#36
603-FinFan-1-1/8-12"	1,125	28,58	12-23	CI	3	1-1/4	211MM#36	217MM#36
605-FinFan-1-1/4-12"	1,250	31,75	11-23	CI	3	1-3/8	103MM#36	107MM#36
607-FinFan-1-1/2-12"	1,500	38,10	11-23	CI	3	1-5/8	107MM#36	111MM#36
609-FinFan-1-3/4-12"	1,750	44,45	9-23	CI	3	1-7/8	111MM#36	115MM#36
611-FinFan-2-12"	2,000	50,80	9-23	CI	3	2-1/8	115MM#36	119MM#36

AVAILABLE LENGTHS

MODEL	DŁUGOŚĆ	
	[MM]	[INCH]
601-FinFan-xx-6	152,4	6"
601-FinFan-xx-8	203,2	8"
601-FinFan-xx-10	254,0	10"
601-FinFan-xx-12	305,0	12"
601-FinFan-xx-14	355,6	14"
601-FinFan-xx-16	406,4	16"


OPTIONAL ATTACHMENT

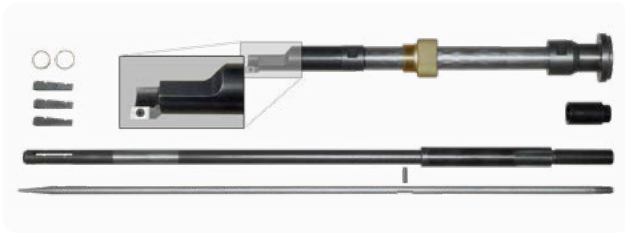

FINFAN SEAL WELD REMOVAL ATTACHMENT

Simply the best solution for seal weld removal from air coolers. Adjustable length locking shaft and support bushing that fits into the plug thread, making this tool the best one available on the market today. A cycle time of approximately 1 min from tube to tube can be expected.

EXAMPLE TOOL APPLICATION

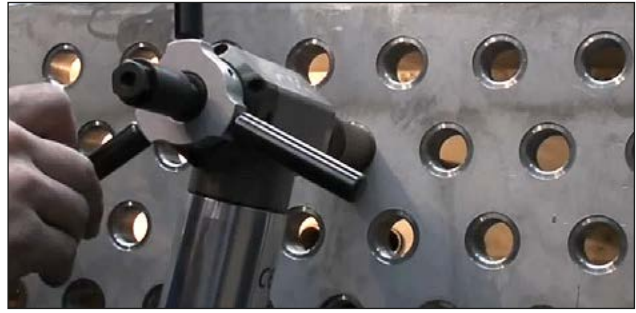

Trimming tubes safely and efficiently. Machine locks securely both to the tube and the plug thread of the water box.

OTHER OPTIONAL ACCESSORIES



SPEED REDUCER

Easy to use gearbox for 3x speed reduction. Increases the torque, enabling the machine to generate a thick chip whilst reducing the cutting time.



SPEED ADJUSTMENT VALVE SAV-500

The solution for all pneumatic drive beveling machines. Allows adjusting cutting speed to suit to the machined tube diameter.



RATCHET FEED

Feed system allowing to work in narrow and tight locations, eg. in water walls.



LEVER FEED

Quick and easy feed system. Used in many basic applications.

EXAMPLE TOOL APPLICATION



Water box demonstration of the simplicity of machine operation.



An operator trimming back tubes prior to seal welding.



MINIMILL 300GFF

Ideal for gasket seat machining of any size of fin fan cooler. A standard machine is equipped with a cutter head and a special locking system to fit your application. The machine locks directly into the plug thread.

STANDARD SET UP**GASKET FINFAN SET**

Supplied with 20 mm shaft, one set of jaws to suit plug thread diameter, pilot and gasket seat milling head. Plug size details must be provided by customer with order.



Custom machined jaws. Showing locked and up-locked position.



STANDARD WORKING RANGE				FEED STROKE	FREE SPEED	POWER	TORQUE
APPLICATION RANGE (ID-OD)		LOCKING RANGE (ID)					
12 TPI		Suit to thread of the plug		20 mm	300 Rpm	1,3 Hp	43 Nm
1,125 - 2,125"				0,787"			32 Ft.Lbs
AIR USE		BODY WIDTH		BODY HEIGHT		BODY WEIGHT	
55 cfm	1,3 m³/min	2,32"	59 mm	13,1"	335 mm	13,2Lbs	6 kg

EXAMPLE TOOL APPLICATION

FinFan cooler before a maintenance



Plug hole before re machining the gasket seat



Safely re-machine gasket surfaces in seconds.




All types of water box materials can be machined with the carbide inserts of the MiniMill 300 GFF.

GASKET SEAT FACING HEADS AND JAWS NUMBERS

HEAD TYPE	PLUG SIZE			SEAL NEST DIAMETER				INSERT	NO. OF INSERTS	JAWS SET NUMBER	PLUG SIZE		TPI	PILOT
	[INCH]	[MM]	TPI	MIN [INCH]	MAX [INCH]	MIN [MM]	MAX [MM]				[INCH]	[MM]		
FFGSMH-1125	1,125	28,58	12	0,940	1,496	24,00	38,00	CI 5x5	4	701MM #36-1-1/8-GFF	1,125	28,575	12	PGFF-1125
FFGSMH-1250	1,250	31,75	12	1,063	1,614	27,00	41,00	CI 5x5	4	703MM #36-1-1/4-GFF	1,250	31,750	12	PGFF-1250
FFGSMH-1350	1,375	34,93	12	1,220	1,772	31,00	45,00	CI 5x5	4	705MM #36-1-3/8-GFF	1,375	34,925	12	PGFF-1350
FFGSMH-1500	1,500	38,10	12	1,339	1,890	34,00	48,00	CI 5x5	4	707MM #36-1-1/2-GFF	1,500	38,100	12	PGFF-1500
FFGSMH-1625	1,625	41,27	12	1,457	2,008	37,00	51,00	CI 5x5	4	709MM #36-1-5/8-GFF	1,625	41,275	12	PGFF-1625
FFGSMH-1750	1,750	44,45	12	1,590	2,140	40,40	54,40	CI 5x5	4	711MM #36-1-3/4-GFF	1,750	44,450	12	PGFF-1750
FFGSMH-1875	1,875	47,62	12	1,720	2,270	43,60	57,60	CI 5x5	4	713MM #36-1-7/8-GFF	1,875	47,625	12	PGFF-1875

Other sizes on request. If plug holes are damaged beyond repair, our MiniDrill 55 can be used to upsize them to the next size. Example - 1-1/8" to 1-3/8".

Seal nest diameter diagram

**OTHER OPTIONAL ACCESSORIES****FAST CLAMPING SYSTEM**

System offers rapid tube to tube cycle time, increased productivity (up to 4x) with little operator fatigue. Ideal for large amount of end preps.

**SPEED ADJUSTMENT VALVE SAV-500**

The solution for all pneumatic drove beveling machines. Allows adjusting cutting speed to suit to the machined tube diameter.

FINMILL

KRAIS FinMill is a air powered tool designed for removing fin from the outside diameter of a tube. The tool is based on the same quality drive and housing as our other PrepMill series tools. Thanks to heavy duty locking system The FinMill fin tube removal tool clamps reliably in the tube and offers chatter-free work at any position.

STANDARD SET UP**DOUBLE SIDE HEAD**

Special shaped head, allows to remove left- and right-handed fins.

**SHAFT25**

Self-align, heavy duty locking system. Shafts and jaws are longer and wider to ensure maximum clamping force.



Reversible motor allow to work and remove left and right hand fins.

STANDARD WORKING RANGE		FEED STROKE	FREE SPEED	POWER	TORQUE		
APPLICATION RANGE (ID-OD)	LOCKING RANGE (ID)						
25 - 127 mm	25 - 122 mm	100 mm	100 Rpm	2,2 Hp	370 Nm		
1-1/4" - 2-1/2"	0,984 - 4,803"	4"			277 Ft.Lbs		
AIR USE		BODY WIDTH		BODY HEIGHT		BODY WEIGHT	
75 cfm	2,2 m³/min	2,59"	66 mm	14,5"	370 mm	19 Lbs	9 kg

MACHINE NUMBERS

RANGE		MACHINE
[INCH]	[MM]	
1-1/4	31,75	FMRH-317
1-1/2	38,10	FMRH-381
1-3/4	44,45	FMRH-444
2	50,80	FMRH-501
2-1/4	57,15	FMRH-571
2-1/2	63,50	FMRH-635

LOCKING RANGES WITH SHAFT25

RANGE [MM]		RANGE [INCH]		JAWS	EXT.	SPRING	
MIN	MAX	MIN	MAX			NUMBER	QTY.
25	30	0,984	1,181	NS-1	-	SP-24	1
30	35	1,181	1,378	NS-2	-	SP-24	1
35	40	1,378	1,575	NS-3	-	SP-25	2
40	45	1,575	1,772	NS-4	-	SP-25	2
45	50	1,772	1,969	NS-5	-	SP-25	2
50	55	1,969	2,165	NS-6	-	SP-25	2
55	60	2,165	2,362	NS-7	-	SP-25	2
60	65	2,362	2,559	NS-8	-	SP-25	2

EXAMPLE TOOL APPLICATION

Removes 4.0" (101 mm) depth of fin from the tube OD in less than 2 minutes


OPTIONAL**STAR WHEEL**

The most precise feed system. Used in many basic and demanding applications.

FINMILL E

FinMill E is electric version of FinMill. A standard machine cover the same pipe sizes and comes with the same cutting head. The electric motor made by Makita with 3 stage planetary gear box made by KRAIS has variable speed control and produce enormous torque. Is interchangeable with pneumatic drive and can be purchased separately at any time.


Free Speed 115 RPM
 Power 750 W
 Torque 366 NM (280 Ft.Lbs)
 Feed Stroke 20 mm (0,787")

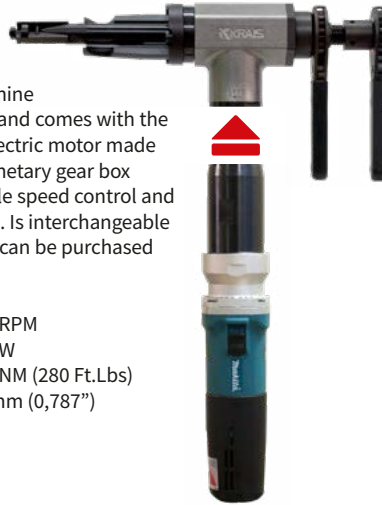

MFM – MANUAL FLANGEMILL

Basic, simple and cost-effective solution for ID mount flange facing. It is a quick and easy way to reface a damaged flat, grooves in pipe flanges on site. Manual FlangeMill size and body is designed and built to allow quick and convenient processing of small flanges in awkward or dangerous locations.

TOOL SWING DIAMETERS



FACING RANGE

BODY SWING DIAMETER



FACING RANGE	LOCKING RANGE	MAX V TOOL TRAVEL	MAX H TOOL TRAVEL	BODY SWING DIAMETER		
30 – 350 mm	25,4 - 254,0 MM	10 MM	55 MM	457,2 MM		
1,750 – 14,000”	1 - 10”	0,395”	2,165”	18”		
DRIVE	BODY WIDTH		BODY LENGTH		BODY WEIGHT	
Manual	6,5”	165 mm	12,8”	325 mm	19,4 Lbs	8,8 kg

MFM TOOL BITS AND HOLDER



Manual Flange Mill uses one just type of holders: MFMH-7-L and MFMH-7-R with carbide insert CI7 (screw MHS-2,7)

	A	B
CI7 mm	7	7

MFM ADVANTAGES



PRECISE DEPTH ADJUSTMENT

The tool depth can be adjusted (10 mm stroke) thru spindle to define cut depth and the correct finish.



EASE OF USE

The tool arm is rotated by hand using a worm-gear mechanism to provide a perfect spiral finish.



SMOOTH OPERATION

Quick adjustment handle to move the cutter to groove position



MACHINING IN EVERY POSITION

Manual FlangeMill can be freely rotated to work in every position. Remachining damaged flat, grooves and raised faced flanges on site is possible in every position.


EXAMPLE TOOL APPLICATION



MFML – MANUAL FLANGEMILL, LONG

Long version of simple and cost-effective solution for ID mount flange facing. It is a quick and easy way to reface a damaged flat, grooves in pipe flanges on site. The L(ong) version FlangeMill size and body is designed and built to allow quick and convenient processing of mid sized flanges in awkward or dangerous locations.

TOOL SWING DIAMETERS



FACING RANGE

BODY SWING DIAMETER



FACING RANGE	LOCKING RANGE	MAX V TOOL TRAVEL	MAX H TOOL TRAVEL	BODY SWING DIAMETER		
51 – 650 mm	51 - 550 MM	10 MM	55 MM	757 MM		
2,01 – 25,60"	2,01 - 21,65"	0,395"	2,165"	30"		
DRIVE	BODY WIDTH		BODY HEIGHT		BODY WEIGHT	
Manual	6,5"	165 mm	18,7"	475 mm	19,4 Lbs	8,8 kg

MFML TOOL BITS AND HOLDER



Manual Flange Mill uses one just type of holders: MFMH-7-L and MFMH-7-R with carbide insert CI7 (screw MHS-2,7)

	A	B
CI7 mm	7	7

MFML ADVANTAGES



PRECISE DEPTH ADJUSTMENT

The tool depth can be adjusted (10 mm stroke) thru spindle to define cut depth and the correct finish.



EASE OF USE

The tool arm is rotated by hand using a worm-gear mechanism to provide a perfect spiral finish.



SMOOTH OPERATION

Quick adjustment handle to move the cutter to groove position




MACHINING IN EVERY POSITION

Manual FlangeMill can be freely rotated to work in every position. Remachining damaged flat, grooves and raised faced flanges on site is possible in every position.

OMFM – OUTSIDE MOUNT MANUAL FLANGE MILL

OMFM is the first in the world, uncomplicated and cost-effective outside mounted manual flange facing tool for machining flanges with diameter from 0 to 150 mm. Gives a quick and easy way to re-machine a damaged sealing surface in the pipe flanges on site. Outside Mounted Manual Flange Mill size and body are designed and built to allow quick and convenient processing of very small flanges in awkward or dangerous locations, where the inside mounted flange facers are impossible to use due to its shaft size.

TOOL SWING DIAMETER



360 - 400 MM / 14,17 - 15,75"



FACING RANGE	CLAMPING RANGE	DRIVE	TOOL WIDTH	TOOL HEIGHT	TOOL WEIGHT
0 - 150 mm	75 - 160 MM	Manual	252 mm	200 mm	16,6 kg
0 - 6"	3,0 - 6,3"		9,9"	7,9"	36,6 Lbs

OMFM LOCKING SYSTEM




OMFM locking system has a 4 independent bolts for manual centring and 4 "self" centring plates made to suit to each flange diameter - it helps to quickly centre the machine on the flange. OMFM allows for very precise set-up for refacing.

OMFM HOLDER



OMFM uses just one type of holders with carbide insert V.

OMFM ADVANTAGES



EASE OF USE
The tool arm is rotated by hand using a worm-gear mechanism to provide a perfect spiral finish.



SMOOTH OPERATION
Quick adjustment handle to move the cutter to groove position

MACHINING IN EVERY POSITION



OMFM can be freely rotated to work in every position. Remachining damaged flat, grooves and raised faced flanges on site is possible in every position.

MMFM – MINI FLANGE MILL

Compact and light weight flange milling machine – one of the most compact designs on the market today.

- 】 Low clearance.
- 】 Flat and raised face flanges
- 】 Single line, true gramophone groove with 50 grooves per 1" to comply with ASME B46.1 code
- 】 Pneumatic drive 1,3 Hp or 750 W electric with multiple planetary gear box
- 】 Stainless steel body to stiffen the machine base
- 】 Rigid construction aluminium facing head , supported by multiple bearings
- 】 Solid locking mandrel shaft and rigid mounting jaw set
- 】 Hardened and ground tool slides for precision

QUALITY COMPONENTS

- 】 Pneumatic motor comes complete with filter, lubricator and flow control.
- 】 Compact, low-profile drive system engineered for superior power to weight ratio.
- 】 Features rugged main body, heavy-duty bearings, sealed lubrication, and rigid mounting system.




FACING RANGE		RANGE PIPE FACING (SINGLE POINT)		LOCKING RANGE		VERTICAL FEED STROKE		MACHINING FEED RATE		POWER	
37 – 254 mm		51 – 254 mm		26 – 150 mm		13 mm		0,5 mm		1,3 Hp	
1,45 – 10"		2 – 10" OD		1,0 – 5,9"		0,5"		0,019"			
AIR USE		WEIGHT		HEIGHT		LENGTH		SWING DIAMETER			
55 cfm	1,3 m³/min	23 Lbs	10,43 kg	19,291"	490 mm	16,338	415 mm	12,204	310 mm		

STANDARD FEED SCREW



Machine comes standard with 50 grooves per inch feed screw and nut. Optional feed screw/ nut are available with 68 and 101 grooves per inch.

CONVENIENT SCALE

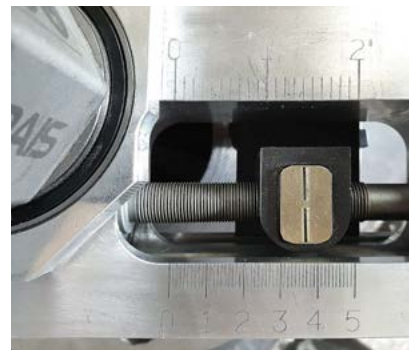

Convenient and easy to read gauge in metric and imperial scale allowing adjustment of the working range before mounting on the flange.

BASIC FEATURES

Single line gramophone groove
(50 grooves per 1 inch)



Graduation of the tool setting to
the desired depth of cut.






Handy depth feed
locking system to
prevent accidental
movement of the
handle during flange
processing.



Hand guard to protect against accidental
impact of the rotating head.

SAFETY FIRST**TOOL HOLDERS RANGES**


MMFM is a low clearance flange facing machine. To achieve this multiple tool holders are required to cover full range, below table specifies machining range of each holder.

		0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300	310	320				
	MMFM-125250													125 - 250 mm (4.92" - 9.84")																								
	MMFM-85210											85 - 250 mm (3.35" - 8.27")																										
	MMFM-37160						37 - 160 mm (1.45" - 6.3")																															

MMFM-E

MMFM-E is electric version of MMFM. A standard machine covers the same flange sizes and comes with the same cutting head. The electric motor, made by Makita with 3 stage planetary gear box made by KRAIS has variable speed control and produce enormous torque. Is interchangeable with pneumatic drive and can be purchased separately at any time. Also available with battery driven motor!

Free Speed 115 RPM
Power..... 750 W
Torque 360 Nm (266 Ft.Lbs)

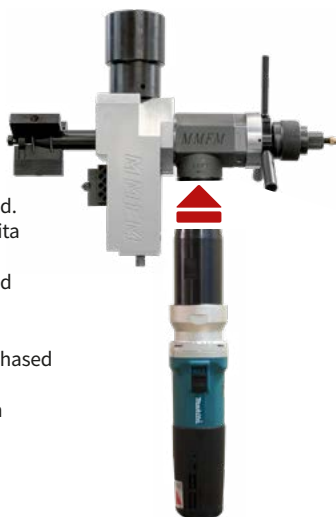**BATTERY OPTION**

The machine is also available with a portable electric drive 18 Volt 5.2 Ah 93.6 Wh Li-Ion battery. The machine can operate up to 15-20 minutes on one battery. Machining itself of one flange takes about 3-4 minutes of motor operation, so the operating time on one battery may suffice on 3-4 flanges. It is possible to have many charged batteries. Comfortable and easy to use in any place where compressed air and electricity is not available or even impossible to use as for example oil refinery.



IMFM-24 INTERNAL MOUNTED FLANGEMILL


Internally mounted, lightweight and durable machine tool. Ideal for machining all types of flange faces, seal grooves, weld preparations and counterbores.

Features:

- 】 Heavy-duty steel/aluminium design
- 】 High rigidity of the machine in relation to the dimension and weight
- 】 Solid but lightweight construction
- 】 Continuous groove facing feeds
- 】 Swivel tool post for grooves, RTJ flanges and bevels
- 】 Easy levelling and centering system with built-in fast centre feature
- 】 Quick clamping with solid, 50 mm self-centering steel shaft
- 】 CE certificate

As standard IMFM is supplied with the complete toolkit, including cutting tool and inserts, air filter with lubricator and hose connection, required jaws to cover the full range, paper manual and storage/shipping box.

Beside standard pneumatic 2,2 Hp drive, for IMFM we offer a wide choice of pneumatic and electric drives.

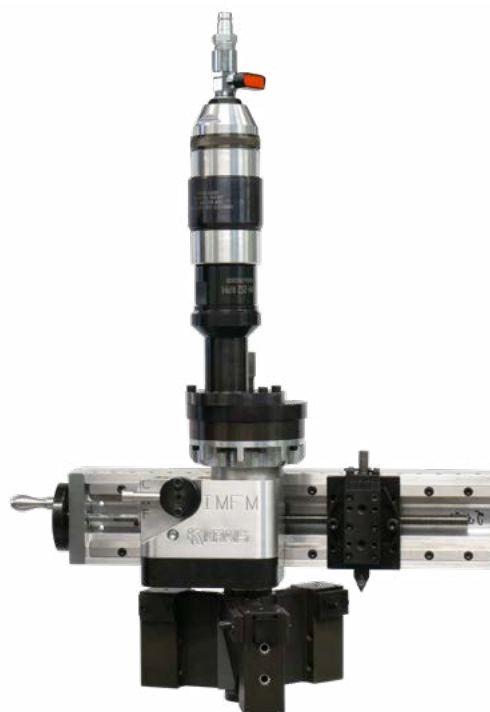

STANDARD WORKING RANGE		FACING FEEDS			FREE SPEED	POWER
FACING RANGE	LOCKING RANGE	1,75 MM SCREW	1,25 MM SCREW	1,00 MM SCREW		
63 – 610 mm	57 - 508 mm	0,2 / 0,8 mm	0,14 / 0,57 mm	0,15 / 0,45 mm	20 - 42 Rpm	2,2 Hp
2,50 - 24,00"	2,25 - 20,00"	0,008 / 0,031"	0,006 / 0,022"	0,004 / 0,018"		1,6 kW
AIR USE		BODY WIDTH		BODY HEIGHT	BODY WEIGHT	
75 cfm	2,2 m³/min	Depends on motor configuration, see drawing below			99 Lbs	45 kg


LEVELLING AND CENTERING




Special jaw set for easy and quick levelling and centering machines on the flange

DIMENSIONS

INLINE VERSION

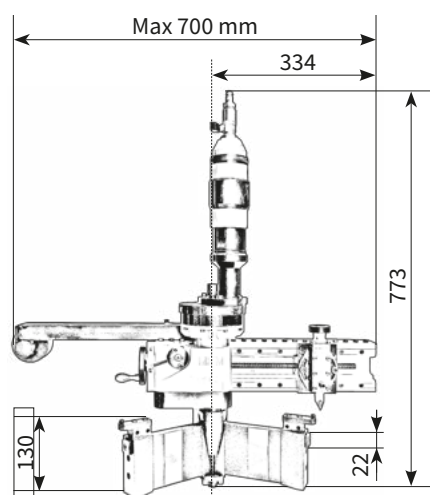

RIGHTANGLE VERSION

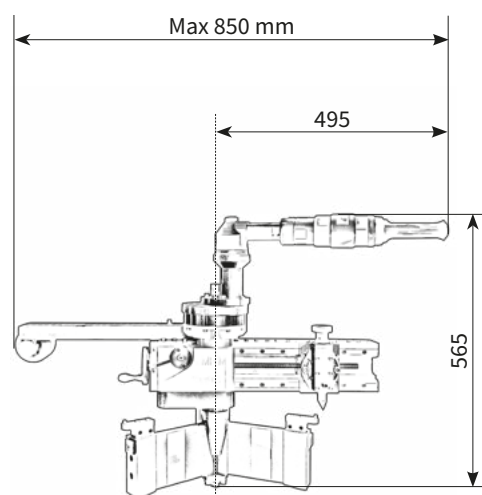


IMFM-40 INTERNAL MOUNTED FLANGEMILL

Internally mounted, lightweight and durable machine tool. Ideal for machining all types of flange faces, seal grooves, weld preparations and counterbores.

- 】 Heavy-duty steel/aluminium design with solid but lightweight construction
- 】 High rigidity of the machine in relation to the dimension and weight
- 】 Continuous groove facing feeds
- 】 Swivel tool post for grooves, RTJ flanges and bevels
- 】 Easy levelling and centering system with built-in self-centre feature
- 】 Quick clamping with solid, 50 mm self-centering steel shaft
- 】 CE certificate

As standard IMFM is supplied with the complete toolkit, including cutting tool and inserts, air filter with lubricator and hose connection, required jaws to cover the full range, paper manual and storage/shipping box. Beside standard pneumatic 2,2 Hp drive, for IMFM we offer a wide choice of pneumatic and electric drives.

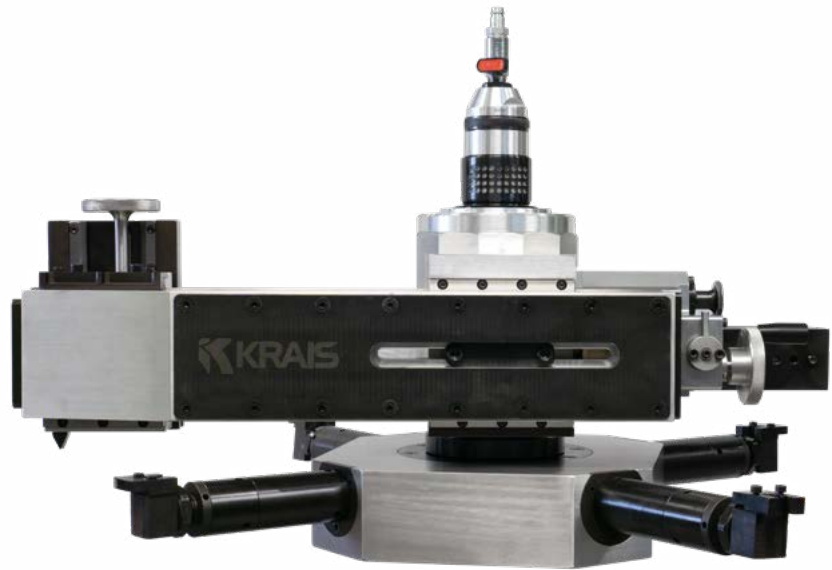

STANDARD WORKING RANGE				MAX SWING DIAMETER	TOOL POST TRAVEL	FEED RATES	FREE SPEED	POWER			
FACING RANGE		CLAMPING RANGE									
152 – 1016 mm		120 - 820 mm		1220 mm	102 mm	See table	0 - 24 Rpm	2,2 Hp			
6 - 39,70"		4,72 - 32,20"		32"	4"			1,6 kW			
AIR USE		SHIPPING WIDTH		SHIPPING HEIGHT		SHIPPING LENGTH		BODY WEIGHT		SHIPPING WEIGHT	
75 cfm	2,2 m³/min	600 mm	24"	725 mm	28,5"	845 mm	34"	145 kg	319 Lbs	210 kg	462 Lbs

FACING FEED RATES (3 OFF IN/OUT)

Direction	Gear	mm/rev	inch/rev	grooves per cm	grooves per inch
Out	1	0,139	0,005	72	183
	2	0,217	0,009	46	117
	3	0,528	0,021	19	48
In	1	0,165	0,006	61	154
	2	0,258	0,010	39	98
	3	0,628	0,025	16	40

BORING FEED RATES (3 OFF UP/DOWN)


mm/rev	inches/rev
0.05 – 0.10 – 0.20	0.002 – 0.004 – 0.008

MACHINE IN ACTION

IMFM on xxx tube xxx shedule, facing operation, producing xx grooves per/cm




LEVELLING AND CENTERING



IMFM40 Special jaw set for easy and quick levelling and centering machine. A special mechanism allows convenient adjustment of the mounting plane relative to the pipe. Built-in self-centering locking system significantly facilitates the coarse setting of the machine.

SWIVEL TOOL AS A STANDARD

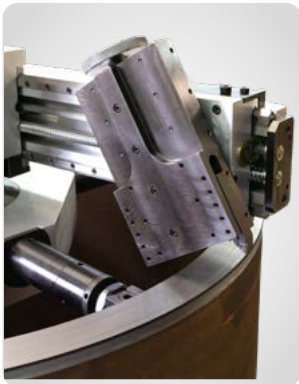

Standard configuration of IMFM is equipped with swivel tool post for grooves, RTJ flanges and bevels

TWO LOCKING PLATES



The offer includes two sizes of locking system. Thanks to the matching dimensions of the rigid body, stable mounting and smooth machining of face surfaces and flanges in all pipe sizes is possible.

SFFM FLANGE FACER

SFFM series Flange Facing Machines are mounted on the outer diameter of the flange. The precise, synchronized radial and axial feed mechanism allows for a high quality machining, resulting in one continuous groove producing a true gramophone finish.

SFFM Flange Facing Machines are suitable for various flange types:


- 】 Flat Face
- 】 Raised Face
- 】 Ring Type Joints (RTJ)
- 】 Tongue & Groove
- 】 Lens Ring
- 】 Grayloc® (hub profile)
- 】 Compact Flanges

SFFM Flange Facers are suitable for the oil and gas industry, power plants, chemical plants, oil rigs and many others. They are prepared to implement applications complying with ASME standards.



MODEL	WORKING RANGE			DIMENSIONS					WEIGHT	JAWS
	UNIT	MIN OD	MAX OD	UNIT	FRAME OD	FRAME ID	FRAME WIDTH	HEIGHT		
SFFM-0410	NPS	2,00	10,00	[inch]	16,22	11,24	2,50	17,3"	57	4
	Metric	50,00	250,00	[mm]	412,00	285,40	63,50	440		
SFFM-1016	NPS	2,00	15,00	[inch]	21,46	16,48	2,50	17,3"	68	6
	Metric	50,00	370,00	[mm]	545,00	418,70	63,50	440		
SFFM-1624	NPS	4,00	23,00	[inch]	29,49	24,41	2,50	17,3"	103	10
	Metric	100,00	580,00	[mm]	749,00	619,90	63,50	440		
SFFM-2836	NPS	8,00	35,00	[inch]	42,15	37,00	2,76	17,3"	180	10
	Metric	200,00	890,00	[mm]	1070,60	939,80	65,40	440		
SFFM-4048	NPS	10,00	47,00	[inch]	54,40	49,53	2,76	17,3"	260	12
	Metric	250,00	1200,00	[mm]	1381,80	1251,00	65,40	440		

FEATURES OF MACHINE



CUTTING GROOVES

The machine offers a simple way of execution of the RTJ grooves by using the single point swivel head or formed tools



GRAMOPHONE GROOVE

The design of the feed attachment assures the automatic and variable feed rate on radial axe producing proper gramophone groove.



STRONG DRIVES

Machine can be driven with a wide range of motors, pneumatic, hydraulic and electrical, including servo drives - all made by KRAIS.



AVAILABLE AS MODULE

For owners of our regular SFSF machines we offer special module, allowing to convert the standard SFSF into regular flange facing module

SFFM MODULE

SFFM Module can be mounted on all our SFSF clamshells and convert the regular Clamshell into OD mount flange facing machine
SFSF clamshell combined with the module widen the scope of its application and still providing the same functionality as the machine SFFM.

Purchasing the SFFM Module allows to save a lot of money by avoiding the purchase of two separate machine tools.

Time needed for the machine changeover is only 20 minutes.



SFSF MODEL	WORKING RANGE WITH MODULE			DIMMENSIONS					WEIGHT*	JAWS
	UNIT	MIN OD	MAX OD	UNIT.	FRAME OD	FRAME ID	FRAME WIDTH	BOTH HEIGHT		
SFSF-0410	NPS	0,80	8,80	[inch]	16,22	11,24	2,50	16,25	57,00	4
	Metric	20,00	224,00	[mm]	412,00	285,40	63,50	412,5		
SFSF-0612	NPS	1,60	10,50	[inch]	18,15	13,24	2,50	16,25	59,00	4
	Metric	40,00	270,00	[mm]	461,00	336,20	63,50	412,5		
SFSF-0814	NPS	1,60	12,00	[inch]	19,49	14,48	2,50	16,25	61,00	6
	Metric	40,00	305,00	[mm]	495,00	367,90	63,50	412,5		
SFSF-1016	NPS	1,60	14,00	[inch]	21,46	16,48	2,50	16,29	68,00	6
	Metric	40,00	356,00	[mm]	545,00	418,70	63,50	413,5		
SFSF-1218	NPS	2,00	16,80	[inch]	23,50	18,48	2,50	16,29	83,00	6
	Metric	50,00	427,00	[mm]	597,00	469,50	63,50	413,5		
SFSF-1420	NPS	2,00	20,00	[inch]	25,47	20,85	2,50	16,29	90,00	6
	Metric	50,00	508,00	[mm]	647,00	520,30	63,50	413,5		
SFSF-1624	NPS	2,00	22,70	[inch]	29,49	24,41	2,50	16,29	103,00	10
	Metric	50,00	578,00	[mm]	749,00	619,90	63,50	413,5		
SFSF-2028	NPS	4,00	26,80	[inch]	33,90	28,75	2,76	17,48	145,00	10
	Metric	100,00	681,00	[mm]	861,10	730,30	65,40	443,7		
SFSF-2432	NPS	8,00	30,70	[inch]	38,15	33,00	2,76	17,48	158,00	10
	Metric	200,00	782,00	[mm]	969,00	838,20	65,40	443,7		
SFSF-2836	NPS	8,00	34,80	[inch]	42,15	37,00	2,76	17,48	180,00	10
	Metric	200,00	884,00	[mm]	1070,60	939,80	65,40	443,7		
SFSF-3442	NPS	10,00	40,70	[inch]	48,15	43,00	2,76	17,48	202,00	10
	Metric	250,00	1036,00	[mm]	1223,00	1092,20	65,40	443,7		
SFSF-4048	NPS	10,00	46,80	[inch]	54,40	49,53	2,76	17,48	260,00	12
	Metric	250,00	1189,00	[mm]	1381,80	1251,00	65,40	443,7		


*depends on machine configuration

SURFACE FINISH



The Modul is equipped as standard with feed gearbox in order to generate both, fine or coarse surface finish by simple switch on the gear box.

SLIMFIT SPLIT FRAME CLAMSHELLS

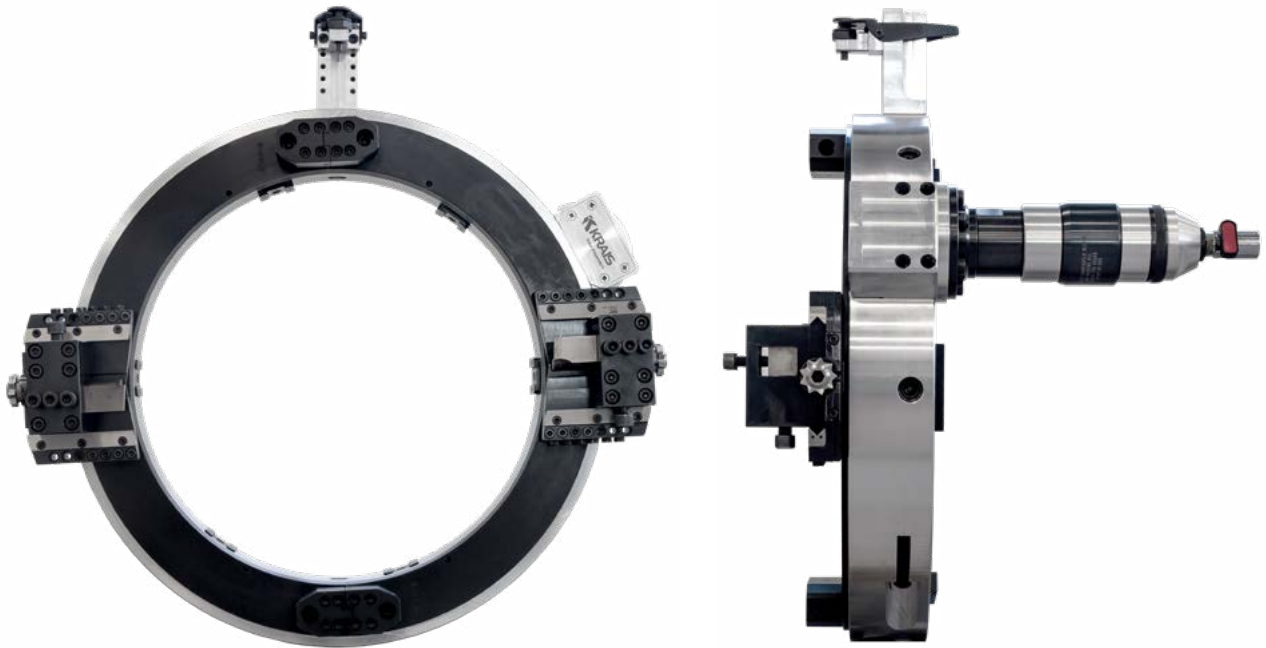

KRAIS SFSF portable SLIM FIT Clamshell series are designed for strength and easy handling. Each of the machine from the SFSF series have a height of 3,248" (82,5 mm) up 24" and 4,47" (113,7 mm) up to 48" and a width of 2.5" (63,5 mm) resulting narrow body low profile design that makes the SFSF series the ideal choice in tight spaces .

- 】 15 Standard models cover a range from 1." (33,4 mm) to 48" (1219 mm) OD
- 】 Pneumatic, hydraulic and electric drive options are available .
- 】 Motor mount on keyways to prevent the motor to twist and potential damage on gear ring .
- 】 Several different drive options are available to best position the motor for a specific machining application
- 】 All pneumatic and electric motors are design and Manufactured by KRAIS after 20 years experience of manufacturing pneumatic drives for boiler and heat exchangers tube rolling motors.
- 】 SFSF series clamshells can be equipped a wide range of accessories to increase performance and expand capabilities.
- 】 Adjustable locator pads minimize the number of locators.



FEATURES



Choice of 3 positions with different travel length tool holder with heat treated slights.



Lever type tripper module for operator safety.



Steel plates on the back part for machine squaring on the pipe .


AIR TREATMENT MODULE



Optional module (ATM) provides air treatment capability for KRAIS pneumatic powered split frames.

General technical machine information to enable to make the right choice to suit your application.

For our SFSF clamshells we offer a wide range of pneumatic , electric made 100% in house and hydraulic choose by our engineers or upon customer preference . Such a big range and variety of parameters allow us to select motor to achieve to best and most post suitable cutting speed to machined pipe material and diameter.

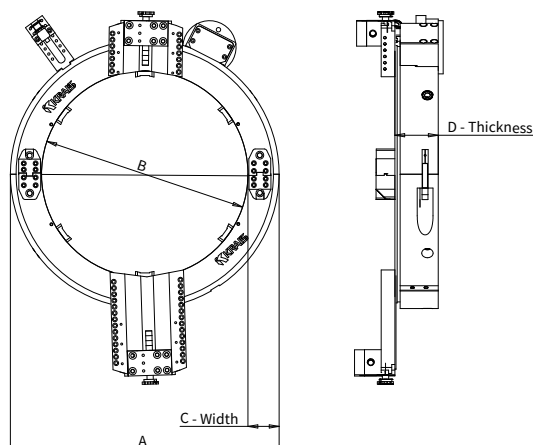

MODEL	PIPE CAPACITY			DIMENSIONS								LOCATOR PADS	GEAR RING RATIO
	UNIT	MIN OD	MAX OD	UNIT	A	B	C	D	1" SLIDE SWING	3" SLIDE SWING	6" SLIDE SWING		
SFSF-0204	NPS	2,000	4,000	[inch]	9,685	4,736	2,500	3,248	12,165	16,165	-	4	4,6:1
	Metric	60,32	127,00	[mm]	246,00	120,30	63,50	82,50	309,00	410,60	-		
SFSF-0256	NPS	2,500	6,000	[inch]	11,831	6,858	2,500	3,248	14,339	18,339	-	4	5,7:1
	Metric	73,02	168,27	[mm]	300,50	174,20	63,50	82,50	364,20	465,80	-		
SFSF-0358	NPS	3,500	8,000	[inch]	13,819	8,846	2,500	3,248	16,339	20,339	26,339	4	6,7:1
	Metric	101,60	219,07	[mm]	351,00	224,70	63,50	82,50	415,00	516,60	669,00		
SFSF-0410	NPS	4,500	10,000	[inch]	16,220	11,236	2,500	3,248	18,756	22,756	28,756	4	7,8:1
	Metric	127,00	273,05	[mm]	412,00	285,40	63,50	82,50	476,40	578,00	730,40		
SFSF-0612	NPS	6,000	12,000	[inch]	18,150	13,236	2,500	3,248	20,843	24,843	30,843	4	8,9:1
	Metric	168,27	323,85	[mm]	461,00	336,20	63,50	82,50	529,40	631,00	783,40		
SFSF-0814	NPS	8,000	14,000	[inch]	19,488	14,484	2,500	3,248	22,063	26,063	32,063	6	9,5:1
	Metric	219,07	355,60	[mm]	495,00	367,90	63,50	82,50	560,40	662,00	814,40		
SFSF-1016	NPS	10,000	16,000	[inch]	21,457	16,484	2,500	3,287	24,102	28,102	34,102	6	10,6:1
	Metric	273,05	406,40	[mm]	545,00	418,70	63,50	83,50	612,20	713,80	866,20		
SFSF-1218	NPS	12,000	18,000	[inch]	23,504	18,484	2,500	3,287	26,224	30,224	36,224	6	11,6:1
	Metric	323,85	457,20	[mm]	597,00	469,50	63,50	83,50	666,10	767,70	920,10		
SFSF-1420	NPS	14,000	20,000	[inch]	25,472	20,848	2,500	3,287	28,150	32,150	38,150	6	12,6:1
	Metric	355,60	508,00	[mm]	647,00	520,30	63,50	83,50	715,00	816,60	969,00		
SFSF-1624	NPS	16,000	24,000	[inch]	29,488	24,406	2,500	3,287	32,268	36,268	42,268	10	14,6:1
	Metric	406,40	609,60	[mm]	749,00	619,90	63,50	83,50	819,60	921,20	1073,60		
SFSF-2028	NPS	20,000	28,000	[inch]	33,900	28,750	2,757	4,476	36,516	40,516	46,516	10	16,9:1
	Metric	508,00	711,20	[mm]	861,10	730,30	65,40	113,70	927,50	1029,10	1181,50		
SFSF-2432	NPS	24,000	32,000	[inch]	38,150	33,000	2,757	4,476	40,787	44,787	50,787	10	19:1
	Metric	609,60	812,80	[mm]	969,00	838,20	65,40	113,70	1036,00	1137,60	1290,00		
SFSF-2836	NPS	28,000	36,000	[inch]	42,150	37,000	2,757	4,476	44,913	48,913	54,913	10	21:1
	Metric	711,20	914,40	[mm]	1070,60	939,80	65,40	113,70	1140,80	1242,40	1394,80		
SFSF-3442	NPS	34,000	42,000	[inch]	48,150	43,000	2,757	4,476	50,906	54,906	60,906	10	24,2:1
	Metric	863,60	1066,80	[mm]	1223,00	1092,20	65,40	113,70	1293,00	1394,60	1547,00		
SFSF-4048	NPS	40,000	48,000	[inch]	54,402	49,525	2,757	4,476	57,276	61,276	67,276	12	27,3:1
	Metric	1016,00	1219,20	[mm]	1381,80	1251,00	65,40	113,70	1454,80	1556,40	1708,80		

SFSF CLAMSHELLS MOTORS

PNEUMATIC MOTORS

B50-100X



B50-xxx-RA



HM-xxx



K7x-LT-xxx



PDx48U



MOTOR	RIGHT-ANGLE	SPEED	POWER	TORQUE	AIR CONSUMPTION		AIR PRESSURE	
		RPM	HP	NM	LT/MIN	CFM	BAR	PSI
B50-100X	-	200	1,3	70	1300	55	6,2	90
B50-115-RA	YES	115	1,3	186	1300	55	6,2	90
B50-210-RA	YES	210	1,3	102	1300	55	6,2	90
B50-290-RA	YES	290	1,3	74	1300	55	6,2	90
HM-198	-	198	2,2	186	2200	75	6,2	90
HM-252	-	252	2,2	150	2200	75	6,2	90
HM-379	-	379	2,2	105	2200	75	6,2	90
HM-498	-	498	2,2	83	2200	75	6,2	90
K72-LT-90	YES	90	2,2	405	2200	75	6,2	90
K73-LT-190	YES	190	2,2	200	2200	75	6,2	90
PD248U	-	185	3,5	416	2800	95	6,2	90
PD348U	-	60	3,5	1250	2800	95	6,2	90

RECOMMENDATIONS

Only proposal and subject to change upon customer requirement and application

PNEUMATIC MOTORS

UNIT	MOTOR*	POWER	WEIGHT
		HP	KG
SF-4	B50-100X	1,3	11
SF-6	HM-252	2,2	17
SF-8	HM-252	2,2	20
SF-10	HM-252	2,2	27
SF-12	HM-252	2,2	23
SF-14	HM-198	2,2	28
SF-16	HM-198	2,2	32
SF-18	K72-LT-90	3,5	36
SF-20	K72-LT-90	3,5	39
SF-24	PD248U	3,5	52
SF-28	PD248U	3,5	95
SF-32	PD248U	3,5	107
SF-36	PD248U	3,5	118
SF-42	PD248U	3,5	137
SF-48	PD248U	3,5	153

HYDRAULIC MOTOR



MOTOR	SPEED	POWER	TORQUE	OIL PRESSURE		MIN. OIL FLOW RATE	
	RPM	HP	NM	BAR	PSI	LT/MIN	GPM
HTB-165	343	16,7	273	190	2750	57	15

HYDRAULIC MOTORS

UNIT	MOTOR*	POWER	WEIGHT
		HP	KG
SF-16	HTB-165	16,7	32
SF-18	HTB-165	16,7	36
SF-20	HTB-165	16,7	39
SF-24	HTB-165	16,7	52
SF-28	HTB-165	16,7	95
SF-32	HTB-165	16,7	107
SF-36	HTB-165	16,7	118
SF-42	HTB-165	16,7	137
SF-48	HTB-165	16,7	153

ELECTRIC MOTORS



PDEC-3200



DUDE 2000



K90Exxx

MOTOR	REVERSIBLE	RIGHTANGLE	MOTOR SPEED	POWER	TORQUE	VOLTAGE
			RPM	WATT	OUT	VOLT
PDEC-3200/100	-	-	100	3200	800 Nm	110/230
PDEC-3200/145	-	-	145	3200	540 Nm	110/230
PDEC-3200/185	-	-	185	3200	420 Nm	110/230
DUDE-2000-4-speed	YES	-	120, 210, 380, 650	2000	240 Nm	110/230
K90E90	-	YES	90	1150	510 Nm	110/230
K90E190	-	YES	190	1150	260 Nm	110/230
K90E280	-	YES	280	1150	190 Nm	110/230

RECOMMENDATION - ELECTRIC MOTORS

First choice electric drive: PDEC-3200 - high-torque motor with built-in controller for precise speed control. Similar to servo motors, this drive does not slow down and does not tighten under load, but generates up to 5 times more torque than a servo motor which translates into high machining stability. Offers additionally a bunch of indicators: for overload, overheating and brush worn.

HIGH-END ELECTRIC SERVO DRIVE WITH CONTROL BOX (3 PHASE)




	POWER [WATT]	VOLTAGE [V]
Drive option 1	2300	390 - 440
Drive option 2	4300	390 - 440


UNIT	MOTOR*	POWER	WEIGHT
		WATT	KG
SF-4	PDEC	3200	11
SF-6	PDEC	3200	17
SF-8	PDEC	3200	20
SF-10	PDEC	3200	27
SF-12	PDEC	3200	23
SF-14	PDEC	3200	28
SF-16	PDEC	3200	32

REACTION RING FOR SFSF CLAMSHELLS**KRAIS SFSF REACTION RING IS PATENT PENDING! ALL RIGHTS RESERVED**

For super heavy applications with super heavy wall and/or hard alloy pipes, consider our ORR to enhance axial and linear stability. We manufacture the ORR steel ring, which mounts on the rear of the aluminium ring. The ORR is also equipped with 4 steel location stabilizers to enhance the range and rigidity of the machine for those heavy duty applications. The ORR dramatically increases the axial stability and rigidity when cutting and/or bevelling. This solution can help to save time and expense for clamshells completely made out of steel – ask your representative for more details.

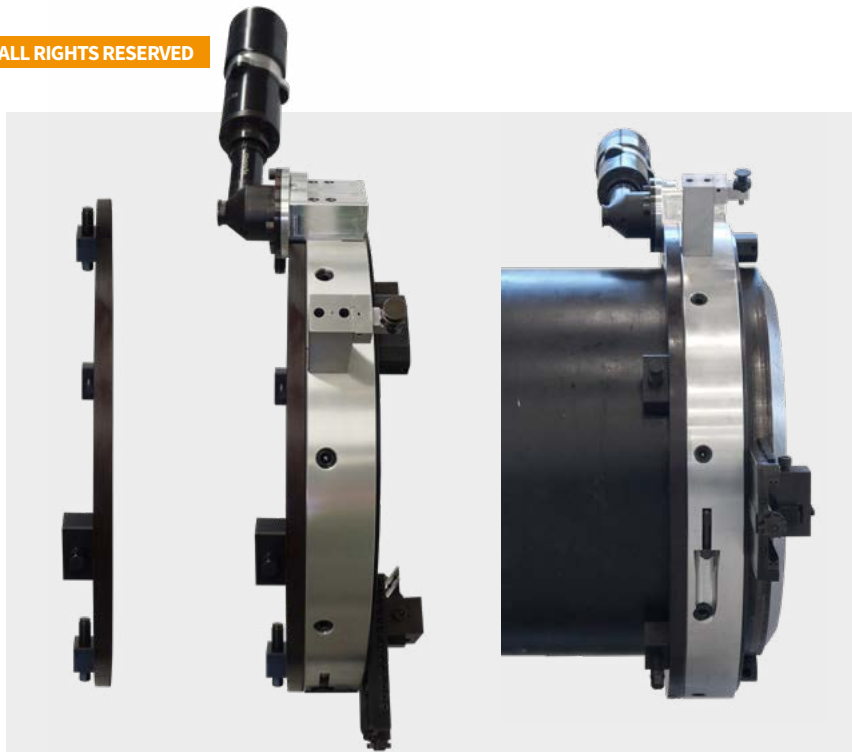

SFSF-1624 with ORR mounted on the 24" pipe schedule 120.

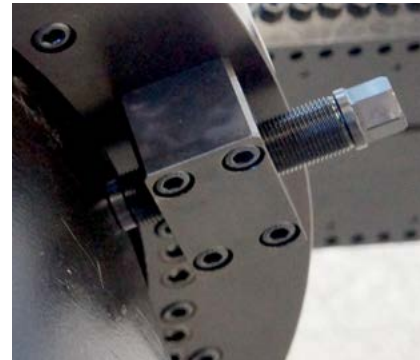

ORR mounted on the rear on the existing threaded holes in the aluminium ring.

SFSF CLAMSHELLS ADD-ONS

TOOL SLIDES



KRAIS Tool Slides are rugged and built for strength and durability tool slides. Standard sizes are 1", 3" and 6". Other on request. Out-of-round and axial-feed tool slides are also available. Built with the same quality: for strength and durability as other KRAIS tool slides. KRAIS Slide construction dramatically eases tool slide mounting and locating.

BCS - BRIDGE CROSS SLIDES



Bridge Cross Slides are available for all KRAIS Split Frame SlimFit series machines. Whether flange facing our single point heavy wall machining, the BCS quickly and easily bolts onto the split frame ring.

BCS NUMBER	RANGE [MM]		RANGE [INCH]	
	MIN	MAX	MIN	MAX
BCS-0814	203,2	355,6	8,000	14,000
BCS-1416	355,6	406,4	14,000	16,000
BCS-1618	406,4	457,2	16,000	18,000
BCS-1820	457,2	508,0	18,000	20,000
BCS-2024	508,0	609,6	20,000	24,000
BCS-2832	609,6	812,8	24,000	32,000
BCS-3236	812,8	914,4	32,000	36,000
BCS-3642	914,4	1066,8	36,000	42,000
BCS-4248	1066,8	1117,6	42,000	44,000

SUPPORT HINGE



Accessory for convenient folding and unfolding of the device. It also allows the use of cranes and lifts that make work easier.

SFSF-CBA UNIVERSAL COUNTERBORE ATTACHMENT



Designed for the precision counterboring of tube and pipe inside diameters. The Universal counterbore is manufactured with both 6" (SFSF-CBA-150) and 10" (SFSF-CBA-254) long sleeves, and attaches directly to all KRAIS Split Frame SlimFit clamshells.

The Universal Counterbore Attachment utilizes a simple and effective hand wheel to precisely control the counterboring process. Both versions (6" and 10") can be mounted directly to the tool slide or Bridge Cross Slide.

SFSF-SCBA SWIVEL HEAD COUNTERBORING ATTACHMENT




Designed for the precision counterboring of tube and pipe inside diameters. The swivel head attachment can also be used for flange facing, OD beveling and flange facing grooving.

The Swivel counterbore is manufactured with both 6" (SFSF-SCBA-150) and 10" (SFSF-SCBA-254) long sleeves, and attaches directly to all KRAIS Split Frame SlimFit clamshells.

The Universal Counterbore Attachment utilizes a simple and effective hand wheel to precisely control the counterboring process. Both versions (6" and 10") can be mounted directly to the tool slide or Bridge Cross Slide.

OUT OF ROUND TOOL SLIDES

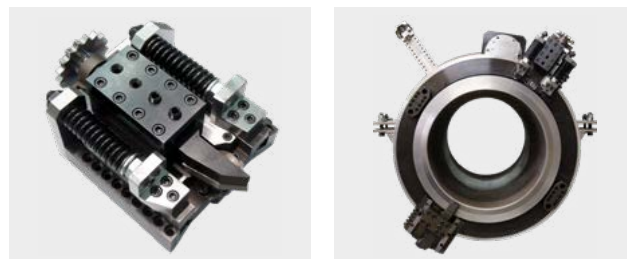

Out of round tool slides - can be solution for all misshapen tubes and pipes. Out of round slides feature durable springs and tracking module that follows the contours of a deformed or less than perfectly round pipe. Built with the same quality: for strength and durability as other KRAIS tool slides.

SFSF CLAMSHELLS BITS AND HOLDERS


INSERTS FOR CLAMSHELLS




Inserts are made out of High Speed Steel with 6% Cobalt and are available with ALNOVE hard coating also.

For other tool bits please send your request.

HOLDERS FOR CLAMSHELLS

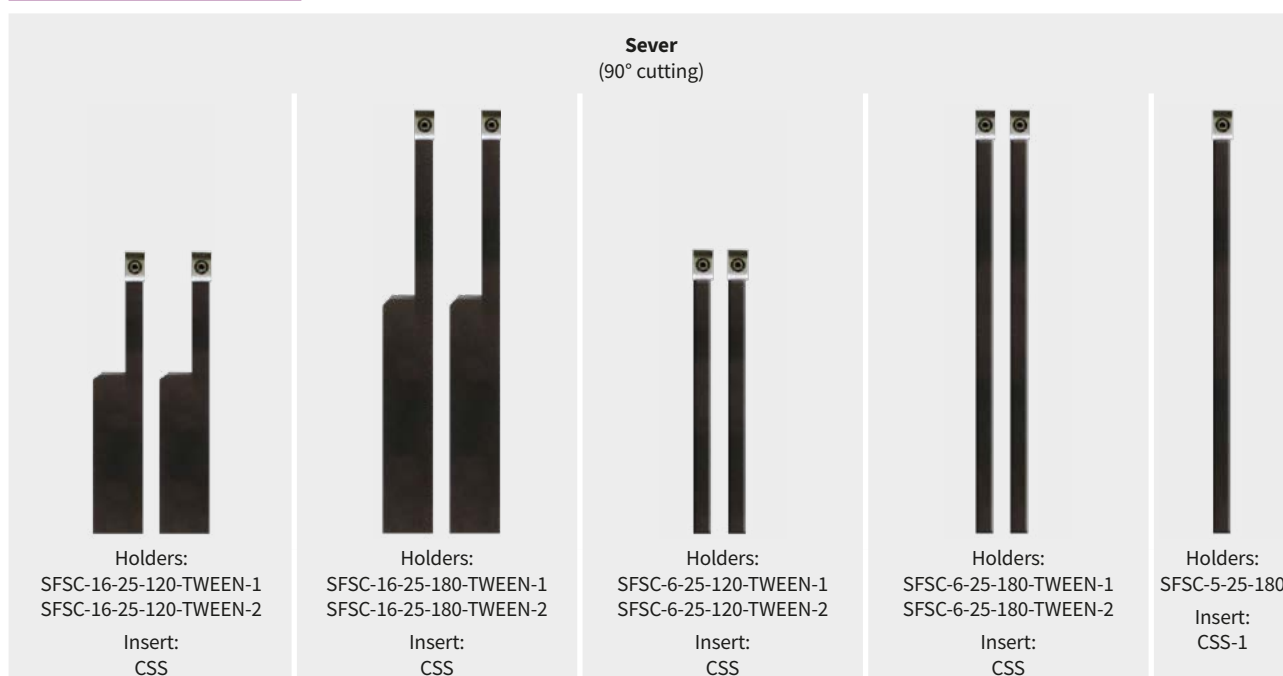

CUTTERS FOR CLAMSHELLS

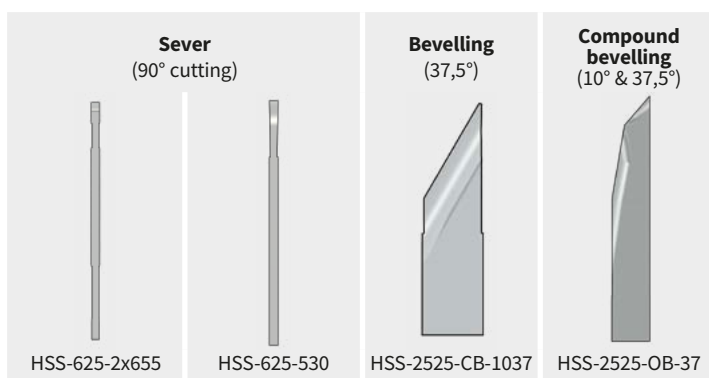


SPECIAL HEADS FOR MINIMILL/HYPERMILL

STWRMH

STRENGTH WELD REMOVAL
BIT: HSS 6% Cobalt
DEGREE: 37.5°

Custom designed head dedicated for strength weld removal. The heads are sized per tube diameter and are precisely engineered so that the inserts cannot damage the shaft or locking jaws. Simple, trouble-free set up makes these heads very advantageous.

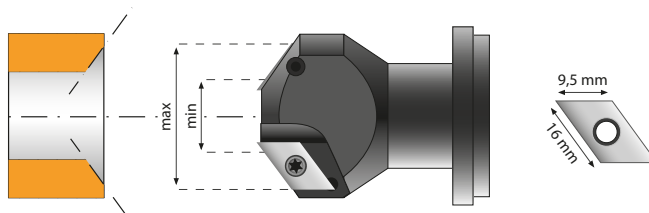


HEAD NR	TUBE CAPACITY			RANGE [INCH]		RANGE [MM]		INSERT	NO. OF INSERTS	SHAFT
	[INCH]	[MM]	BWG	MIN	MAX	MIN	MAX			
STWRMH-190	0,750	19,05	12-23	0,530	1,46	13,50	37,00	WRI	2	901 MM#151 12,4 mm
STWRMH-222	0,875	22,23	12-23	0,650	1,496	16,50	38,00	WRI	2	905 MM#151 13,9 mm
STWRMH-254	1,000	25,40	10-23	0,732	1,654	18,60	42,00	WRI	2	909 MM#151 16,9 mm
STWRMH-285	1,125	28,58	10-23	0,858	1,772	21,80	45,00	WRI	2	STD Shaft: 20 or 25 mm
STWRMH-317	1,250	31,75	9-23	0,945	1,850	24,00	47,00	WRI	2	STD Shaft: 20 or 25 mm
STWRMH-381	1,500	38,10	8-23	1,142	2,047	29,00	52,00	WRI	2	STD Shaft: 20 or 25 mm
STWRMH-444	1,750	44,45	8-23	1,417	2,244	36,00	57,00	CDI	2	STD Shaft: 20 or 25 mm
STWRMH-508	2,000	50,80	6-23	1,575	2,480	40,00	63,00	CDI	2	STD Shaft: 20 or 25 mm
STWRMH-571	2,250	57,15	6-23	1,811	2,717	46,00	69,00	CDI	2	STD Shaft: 20 or 25 mm
STWRMH-603	2,375	60,33	6-23	1,949	2,854	49,50	72,50	CDI	2	STD Shaft: 20 or 25 mm
STWRMH-635	2,500	63,50	6-23	2,067	2,972	52,50	75,50	CDI	2	STD Shaft: 20 or 25 mm
STWRMH-762	3,000	76,20	6-23	2,579	3,484	65,50	88,50	CDI	2	STD Shaft: 20 or 25 mm
STWRMH-889	3,500	88,90	6-23	3,071	3,976	78,00	101,00	CDI	2	STD Shaft: 20 or 25 mm
STWRMH-900	4,000	101,60	6-23	3,563	4,469	90,50	113,50	CDI	2	STD Shaft: 20 or 25 mm

TFMH

TUBE FACING MILLING HEAD
BIT: HSS 6% Cobalt
DEGREE: 90.0°

A tube facing milling head created for facing tubes made of any type of material. Utilizes 6% cobalt inserts.

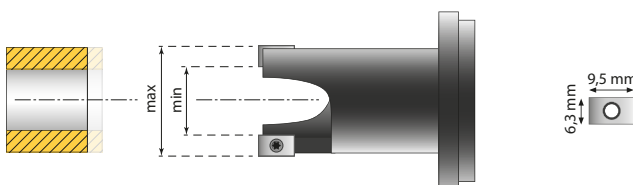


HEAD NR	RURA			RANGE [INCH]		RANGE [MM]		INSERT	NO. OF INSERTS	SHAFT
	[INCH]	[MM]	BWG	MIN	MAX	MIN	MAX			
TFMH-145	0,570	14,48	16-23	0,441	0,870	11,2	22,1	CSZ	2	801 MM#151 Micro 10,0MM
TFMH-158	0,625	15,88	16-23	0,500	0,933	12,70	23,70	CSZ	2	805 MM#151 Micro 11,5 MM
TFMH-190	0,750	19,05	12-23	0,531	1,004	13,50	25,50	CSS	2	901 MM#151 12,4 mm
TFMH-222	0,875	22,23	12-23	0,654	1,063	16,60	27,00	CSS	2	905 MM#151 13,9 mm
TFMH-254	1,000	25,40	11-23	0,764	1,201	19,40	30,50	CSS	2	909 MM#151 16,9 mm
TFMH-285	1,125	28,58	11-23	0,854	1,307	21,70	33,20	CSS	2	915 MM#151 20,0 mm
TFMH-317	1,250	31,75	9-23	0,949	1,366	24,10	34,70	CSS	2	915 MM#151 20,0 mm
TFMH-381	1,500	38,10	9-23	1,197	1,614	30,40	41,00	CSS	2	915 MM#151 20,0 mm
TFMH-444	1,750	44,45	9-23	1,449	1,862	36,80	47,30	CS	2	MM#37
TFMH-508	2,000	50,80	9-23	1,701	2,114	43,20	53,70	CS	2	MM#37

OBMH

OUTSIDE BEVEL MILLING HEAD
BIT: HSS 6% Cobalt
DEGREE: 37,5°

Dedicated for the outside beveling of both tubes and pipes. Sized per tube or pipe diameter and angle of required weld bevel. The heads are precisely engineered so that the inserts cannot damage the shaft or locking jaws.

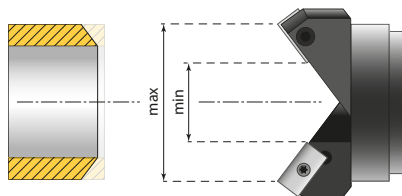


HEAD NR	TUBE CAPACITY			RANGE [INCH]		RANGE [MM]		INSERT	NO. OF INSERTS	SHAFT
	[INCH]	[MM]	BWG	MIN	MAX	MIN	MAX			
OBMH-190	0,750	19,05	14-23	0,5826	0,866	14,80	22,00	CS	2	901 MM#151 12,4 mm
OBMH-222	0,875	22,23	12-23	0,654	1,004	16,60	25,50	CS	2	905 MM#151 13,9 mm
OBMH-254	1,000	25,40	11-23	0,764	1,122	19,40	28,50	CS	2	909 MM#151 16,9 mm
OBMH-285	1,125	28,58	11-23	0,890	1,240	22,60	31,50	CS	2	915 MM#151 20 mm
OBMH-317	1,250	31,75	8-23	0,917	1,732	23,30	44,00	CDI	2	STD Shaft: 20 or 25 mm
OBMH-381	1,500	38,10	6-23	0,984	1,850	25,00	47,00	CDI	2	STD Shaft: 20 or 25 mm
OBMH-444	1,750	44,45	6-23	1,024	1,890	26,00	48,00	CDI	2	STD Shaft: 20 or 25 mm
OBMH-508	2,000	50,80	6-23	1,181	2,047	30,00	52,00	CDI	2	STD Shaft: 20 or 25 mm
OBMH-571	2,250	57,15	6-23	1,417	2,283	36,00	58,00	CDI	2	STD Shaft: 20 or 25 mm
OBMH-603	2,375	60,33	6-23	1,535	2,402	39,00	61,00	CDI	2	STD Shaft: 20 or 25 mm
OBMH-635	2,500	63,50	6-23	1,654	2,559	42,00	65,00	CDI	2	STD Shaft: 20 or 25 mm
OBMH-762	3,000	76,20	6-23	2,165	3,031	55,00	77,00	CDI	2	STD Shaft: 20 or 25 mm
OBMH-889	3,500	88,90	6-23	2,677	3,543	68,00	90,00	CDI	2	STD Shaft: 20 or 25 mm
OBMH-900	4,000	101,60	6-23	3,150	4,016	80,00	102,00	CDI	2	STD Shaft: 20 or 25 mm

MMRBMH

MEMBRANE REMOVAL HEAD
BIT: CARBIDE

Specially designed head for membrane removal and overlay head (cladding removal)

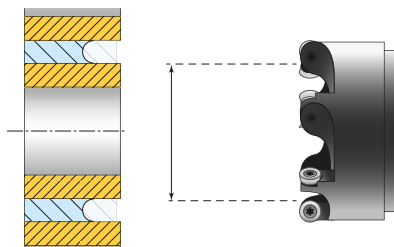


HEAD NR	TUBE CAPACITY		RANGE [INCH]		RANGE [MM]		INSERT	NO. OF INSERTS
	[INCH]	[MM]	MIN	MAX	MIN	MAX		
MMRBMH-254	1,000	25,40	1,000	1,630	25,40	41,40	PO8	4
MMRBMH-288	1,125	28,58	1,134	1,764	28,80	44,80	PO8	5
MMRBMH-317	1,250	31,75	1,248	1,878	31,70	47,70	PO8	5
MMRBMH-381	1,500	38,10	1,500	2,130	38,10	54,10	PO8	6
MMRBMH-444	1,750	44,45	1,748	2,378	44,40	60,40	PO8	6
MMRBMH-508	2,000	50,80	2,000	2,630	50,80	66,80	PO8	7
MMRBMH-571	2,250	57,15	2,252	2,882	57,20	73,20	PO8	7
MMRBMH-603	2,375	60,33	2,374	3,004	60,30	76,30	PO8	7
MMRBMH-635	2,500	63,50	2,500	3,130	63,50	79,50	PO8	7
MMRBMH-762	3,000	76,20	3,000	3,630	76,20	92,20	PO8	8
MMRBMH-889	3,500	88,90	3,500	4,130	88,90	104,90	PO8	8
MMRBMH-101	4,000	101,60	4,000	4,630	101,60	117,60	PO8	9

SWRMH

SEAL WELD REMOVAL HEAD
BIT: CARBIDE
DEGREE: 90.0°

Size specific heads designed for seal weld removal on tubes. Suitable for weld removal on carbon, duplex, inconel and other exotic alloys. Utilizes 4 sided carbide inserts.

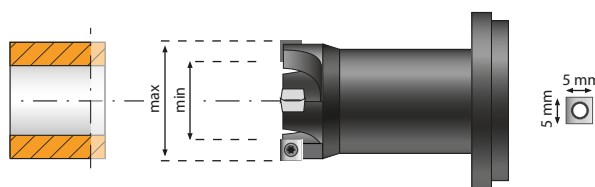


HEAD NR	TUBE CAPACITY			RANGE [INCH]		RANGE [MM]		INSERT	NO. OF INSERTS	SCREW
	[INCH]	[MM]	BWG	MIN	MAX	MIN	MAX			
SWRMH-160	0,625	15,88	17-22	0,500	1,100	12,70	28,00	CI 5x5	4	MHS-2
SWRMH-190	0,750	19,05	11-22	0,510	1,140	13,00	29,00	CI 5x5	4	MHS-2
SWRMH-222	0,875	22,23	10-22	0,710	1,300	18,00	33,00	CI 5x5	4	MHS-2
SWRMH-254	1,000	25,40	8-20	0,810	1,380	20,50	35,00	CI 5x5	4	MHS-2

SWROTC

TUBE FACING MILLING HEAD
BIT: HSS 6% Cobalt

A seal weld removal head over tube circumference prior to re-welding the damaged joint without removing the tube.

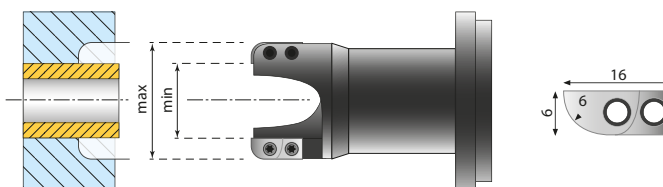


HEAD NR	TUBE CAPACITY		RANGE [INCH]		RANGE [MM]		INSERT	NO. OF INSERTS	SHAFT
	[INCH]	[MM]	MIN	MAX	MIN	MAX			
SWROTC-190	0,750	19,05	0,750	1,222	19,05	31,05	CSWR	2	901 MM#151 12,4 mm
SWROTC-222	0,875	22,23	0,874	1,346	22,20	34,20	CSWR	2	905 MM#151 13,9 mm
SWROTC-254	1,000	25,40	1,000	1,472	25,40	37,40	CSWR	2	909 MM#151 16,9 mm
SWROTC-285	1,125	28,58	1,124	1,596	28,55	40,55	CSWR	2	915 MM#151 20,0 mm
SWROTC-318	1,250	31,7	1,250	1,722	31,75	43,75	CSWR	2	915 MM#151 20,0 mm
SWROTC-381	1,500	38,1	1,500	1,969	38,10	50,01	CSWR	2	915 MM#151 20,0 mm

MMFH

TUBE FACING MILLING HEAD
BIT: CARBIDE
DEGREE: 90.0°

A tube facing milling head suitable for machining tubes manufactured from very hard materials such as duplex, inconel and other exotic alloys. Utilizes 4 sided carbide inserts.

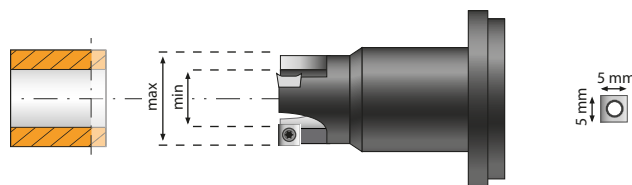


HEAD NR	TUBE CAPACITY			RANGE [INCH]		RANGE [MM]		INSERT	NO. OF INSERTS	SHAFT
	[INCH]	[MM]	BWG	MIN	MAX	MIN	MAX			
MMFH-145	0,550	14,00	17-23	0,440	0,807	11,20	20,5	CI 5x5	2	801 MM#151 Micro 10,0 MM
MMFH-158	0,625	15,88	16-23	0,500	0,866	12,70	22,00	CI 5x5	2	805 MM#151 Micro 11,5 MM
MMFH-190	0,750	19,05	13-23	0,559	0,906	14,20	23,00	CI 5x5	3	901 MM#151 12,4 mm
MMFH-222	0,875	22,23	12-23	0,654	0,965	16,60	24,50	CI 5x5	3	905 MM#151 13,9 mm
MMFH-254	1,000	25,40	11-23	0,764	1,087	19,40	27,50	CI 5x5	3	909 MM#151 16,9 mm
MMFH-285	1,125	28,58	11-23	0,886	1,213	22,50	30,80	CI 5x5	3	915 MM#151 20,0 mm

SPECIAL HEADS FOR PREPMILL

OBPM

OUTSIDE BEVEL MILLING HEAD
BIT: HSS 6% Cobalt
DEGREE: 37,5°

Custom, precisely designed head. Dedicated for the outside beveling of both tubes and pipes. Sized per tube or pipe diameter and angle of required weld bevel. The heads are precisely engineered so that the inserts cannot damage the shaft or locking jaws.

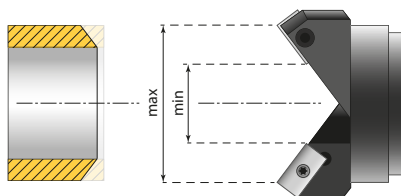


HEAD NR	TUBE CAPACITY			RANGE [INCH]		RANGE [MM]		INSERT	NO. OF INSERTS	SHAFT
	[INCH]	[MM]	BWG	MIN	MAX	MIN	MAX			
OBPM-190	0,750	19,05	14-23	0,5826	0,866	14,80	22,00	CS	2	915 MM#151 20 mm
OBPM-222	0,875	22,23	12-23	0,654	1,004	16,60	25,50	CS	2	STD Shaft: 20 or 25 mm
OBPM-254	1,000	25,40	11-23	0,764	1,122	19,40	28,50	CS	2	STD Shaft: 20 or 25 mm
OBPM-285	1,125	28,58	11-23	0,890	1,240	22,60	31,50	CS	2	STD Shaft: 20 or 25 mm
OBPM-317	1,250	31,75	8-23	0,917	1,732	23,30	44,00	CDI	2	STD Shaft: 20 or 25 mm
OBPM-381	1,500	38,10	6-23	0,984	1,850	25,00	47,00	CDI	2	STD Shaft: 20 or 25 mm
OBPM-444	1,750	44,45	6-23	1,024	1,890	26,00	48,00	CDI	2	STD Shaft: 20 or 25 mm
OBPM-508	2,000	50,80	6-23	1,181	2,047	30,00	52,00	CDI	2	STD Shaft: 20 or 25 mm
OBPM-571	2,250	57,15	6-23	1,417	2,283	36,00	58,00	CDI	2	STD Shaft: 20 or 25 mm
OBPM-603	2,375	60,33	6-23	1,535	2,402	39,00	61,00	CDI	2	STD Shaft: 20 or 25 mm
OBPM-635	2,500	63,50	6-23	1,654	2,559	42,00	65,00	CDI	2	STD Shaft: 20 or 25 mm
OBPM-762	3,000	76,20	6-23	2,165	3,031	55,00	77,00	CDI	2	STD Shaft: 20 or 25 mm
OBPM-889	3,500	88,90	6-23	2,677	3,543	68,00	90,00	CDI	2	STD Shaft: 20 or 25 mm
OBPM-900	4,000	101,60	6-23	3,150	4,016	80,00	102,00	CDI	2	STD Shaft: 20 or 25 mm

PRRBH

MEMBRANE REMOVAL HEAD
BIT: CARBIDE

Specially designed head for membrane removal and overlay head (cladding removal)

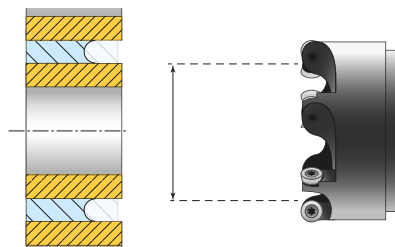


HEAD NR	TUBE CAPACITY		RANGE [INCH]		RANGE [MM]		INSERT	NO. OF INSERTS
	[INCH]	[MM]	MIN	MAX	MIN	MAX		
PRRBH-254	1,000	25,40	1,000	1,630	25,40	41,40	PO8	4
PRRBH-288	1,125	28,58	1,134	1,764	28,80	44,80	PO8	5
PRRBH-317	1,250	31,75	1,248	1,878	31,70	47,70	PO8	5
PRRBH-381	1,500	38,10	1,500	2,130	38,10	54,10	PO8	6
PRRBH-444	1,750	44,45	1,748	2,378	44,40	60,40	PO8	6
PRRBH-508	2,000	50,80	2,000	2,630	50,80	66,80	PO8	7
PRRBH-571	2,250	57,15	2,252	2,882	57,20	73,20	PO8	7
PRRBH-603	2,375	60,33	2,374	3,004	60,30	76,30	PO8	7
PRRBH-635	2,500	63,50	2,500	3,130	63,50	79,50	PO8	7
PRRBH-762	3,000	76,20	3,000	3,630	76,20	92,20	PO8	8
PRRBH-889	3,500	88,90	3,500	4,130	88,90	104,90	PO8	8
PRRBH-101	4,000	101,60	4,000	4,630	101,60	117,60	PO8	9

STWRPM

STRENGTH WELD REMOVAL
BIT: HSS 6% Cobalt
DEGREE: 37.5°

Custom designed head dedicated for strength weld removal. The heads are sized per tube diameter and are precisely engineered so that the inserts cannot damage the shaft or locking jaws. Simple, trouble-free set up makes these heads very advantageous.

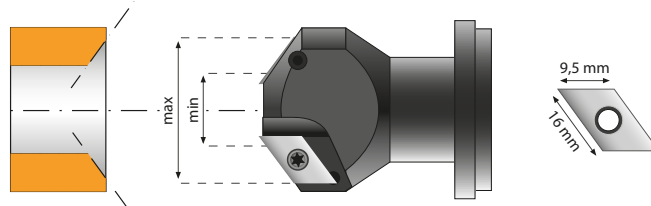


HEAD NR	TUBE CAPACITY			RANGE [INCH]		RANGE [MM]		INSERT	NO. OF INSERTS	SHAFT
	[INCH]	[MM]	BWG	MIN	MAX	MIN	MAX			
STWRPM-190	0,750	19,05	12-23	0,530	1,46	13,50	37,00	WRI	2	STD Shaft: 20 mm
STWRPM-222	0,875	22,23	12-23	0,650	1,496	16,50	38,00	WRI	2	STD Shaft: 20 or 25 mm
STWRPM-254	1,000	25,40	10-23	0,732	1,654	18,60	42,00	WRI	2	STD Shaft: 20 or 25 mm
STWRPM-285	1,125	28,58	10-23	0,858	1,772	21,80	45,00	WRI	2	STD Shaft: 20 or 25 mm
STWRPM-317	1,250	31,75	9-23	0,945	1,850	24,00	47,00	WRI	2	STD Shaft: 20 or 25 mm
STWRPM-381	1,500	38,10	8-23	1,142	2,047	29,00	52,00	WRI	2	STD Shaft: 20 or 25 mm
STWRPM-444	1,750	44,45	8-23	1,417	2,244	36,00	57,00	CDI	2	STD Shaft: 20 or 25 mm
STWRPM-508	2,000	50,80	6-23	1,575	2,480	40,00	63,00	CDI	2	STD Shaft: 20 or 25 mm
STWRPM-571	2,250	57,15	6-23	1,811	2,717	46,00	69,00	CDI	2	STD Shaft: 20 or 25 mm
STWRPM-603	2,375	60,33	6-23	1,949	2,854	49,50	72,50	CDI	2	STD Shaft: 20 or 25 mm
STWRPM-635	2,500	63,50	6-23	2,067	2,972	52,50	75,50	CDI	2	STD Shaft: 20 or 25 mm
STWRPM-762	3,000	76,20	6-23	2,579	3,484	65,50	88,50	CDI	2	STD Shaft: 20 or 25 mm
STWRPM-889	3,500	88,90	6-23	3,071	3,976	78,00	101,00	CDI	2	STD Shaft: 20 or 25 mm
STWRPM-900	4,000	101,60	6-23	3,563	4,469	90,50	113,50	CDI	2	STD Shaft: 20 or 25 mm

TFPM

TUBE FACING MILLING HEAD
BIT: HSS 6% Cobalt
DEGREE: 90.0°

A tube facing milling head created for facing tubes made of any type of material. Utilizes 6% cobalt inserts.

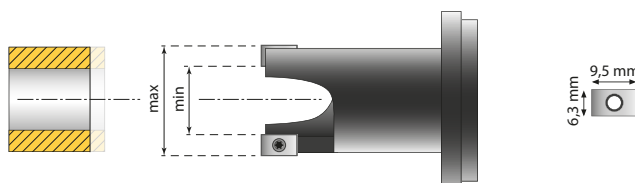


HEAD NR	TUBE CAPACITY			RANGE [INCH]		RANGE [MM]		INSERT	NO. OF INSERTS	SHAFT
	[INCH]	[MM]	BWG	MIN	MAX	MIN	MAX			
TFMP-285	1,125	28,58	11-23	0,854	1,307	21,70	33,20	CSS	2	STD Shaft 20 mm
TFMP-317	1,250	31,75	9-23	0,949	1,366	24,10	34,70	CSS	2	STD Shaft 20 mm
TFMP-381	1,500	38,10	9-23	1,197	1,614	30,40	41,00	CSS	2	STD Shaft: 20 or 25 mm
TFMP-444	1,750	44,45	9-23	1,449	1,862	36,80	47,30	CS	2	STD Shaft: 20 or 25 mm
TFMP-508	2,000	50,80	9-23	1,701	2,114	43,20	53,70	CS	2	STD Shaft: 20 or 25 mm

SPECIAL HEADS FOR PANELMILL

OBPMH

OUTSIDE BEVEL MILLING HEAD
BIT: HSS 6% COBALT
DEGREE: 37,5°

OBPMH bevelling head for bevelling tubes without membranes in a boiler waterwall.

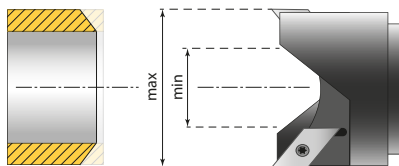


HEAD NR	TUBE CAPACITY			RANGE [INCH]		RANGE [MM]		INSERT	NO. OF INSERTS
	[INCH]	[MM]	BWG	MIN	MAX	MIN	MAX		
OBPMH-190	0,750	19,05	14-23	0,5826	0,866	14,80	22,00	WRIL	2
OBPMH-222	0,875	22,23	12-23	0,654	1,004	16,60	25,50	WRIL	2
OBPMH-254	1,000	25,40	11-23	0,764	1,122	19,40	28,50	WRIL	2
OBPMH-285	1,125	28,58	11-23	0,890	1,240	22,60	31,50	WRIL	2
OBPMH-317	1,250	31,75	8-23	0,917	1,732	23,30	44,00	WRIL	2
OBPMH-381	1,500	38,10	6-23	0,984	1,850	25,00	47,00	WRIL	2
OBPMH-444	1,750	44,45	6-23	1,024	1,890	26,00	48,00	WRIL	2
OBPMH-508	2,000	50,80	6-23	1,181	2,047	30,00	52,00	WRIL	2
OBPMH-571	2,250	57,15	6-23	1,417	2,283	36,00	58,00	WRIL	2
OBPMH-603	2,375	60,33	6-23	1,535	2,402	39,00	61,00	WRIL	2
OBPMH-635	2,500	63,50	6-23	1,654	2,559	42,00	65,00	WRIL	2
OBPMH-889	3,500	88,90	6-23	2,677	3,543	68,00	90,00	WRIL	2

PMRBMH

MEMBRANE REMOVAL HEAD
BIT: CARBIDE

Specially designed head for membrane removal and overlay head (cladding removal)

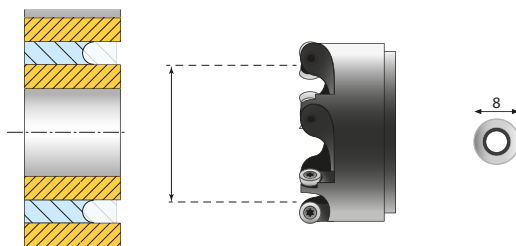


HEAD NR	TUBE CAPACITY		RANGE [INCH]		RANGE [MM]		INSERT	NO. OF INSERTS
	[INCH]	[MM]	MIN	MAX	MIN	MAX		
PMRBMH-254	1,000	25,40	1,000	1,630	25,40	41,40	PO8	4
PMRBMH-288	1,125	28,58	1,134	1,764	28,80	44,80	PO8	5
PMRBMH-317	1,250	31,75	1,248	1,878	31,70	47,70	PO8	5
PMRBMH-381	1,500	38,10	1,500	2,130	38,10	54,10	PO8	6
PMRBMH-444	1,750	44,45	1,748	2,378	44,40	60,40	PO8	6
PMRBMH-508	2,000	50,80	2,000	2,630	50,80	66,80	PO8	7
PMRBMH-571	2,250	57,15	2,252	2,882	57,20	73,20	PO8	7
PMRBMH-603	2,375	60,33	2,374	3,004	60,30	76,30	PO8	7
PMRBMH-635	2,500	63,50	2,500	3,130	63,50	79,50	PO8	7
PMRBMH-762	3,000	76,20	3,000	3,630	76,20	92,20	PO8	8
PMRBMH-889	3,500	88,90	3,500	4,130	88,90	104,90	PO8	8
PMRBMH-101	4,000	101,60	4,000	4,630	101,60	117,60	PO8	9


SPECIAL HEADS FOR PANELMILL PF

PRRBH-PF

Membrane removal
and overlay head
with carbide bits.

**CRH-PF**

Cladding removal
head with carbide bits.




HEAD NR	TUBE CAPACITY		INSERT	NO. OF INSERTS
	[INCH]	[MM]		
PRRBH-PF-508	2,000	50,80	PO8	7
PRRBH-PF-571	2,250	57,15	PO8	7
PRRBH-PF-603	2,375	60,33	PO8	7
PRRBH-PF-635	2,500	63,50	PO8	7
PRRBH-PF-762	3,000	76,20	PO8	9

HEAD NR	TUBE CAPACITY		INSERT	NO. OF INSERTS
	[INCH]	[MM]		
CRH-PF-508	2,000	50,80	CI 9x9	3
CRH-PF-571	2,250	57,15	CI 9x9	3
CRH-PF-603	2,375	60,33	CI 9x9	3
CRH-PF-635	2,500	63,50	CI 9x9	3
CRH-PF-762	3,000	76,20	CI 9x9	3

OBPMH-PF

Outside beveling
head (37,5°) for tubes
without membranes,
with HSS 6% cobalt
bits.

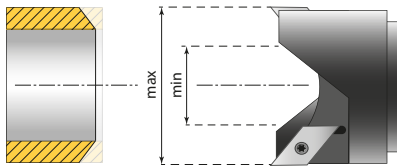


HEAD NR	TUBE CAPACITY			RANGE [INCH]		RANGE [MM]		INSERT	NO. OF INSERTS
	[INCH]	[MM]	BWG	MIN	MAX	MIN	MAX		
OBPMH-PF-285	1,125	28,58	11-23	0,890	1,240	22,60	31,50	WRIL	2
OBPMH-PF-317	1,250	31,75	8-23	0,917	1,732	23,30	44,00	WRIL	2
OBPMH-PF-381	1,500	38,10	6-23	0,984	1,850	25,00	47,00	WRIL	2
OBPMH-PF-444	1,750	44,45	6-23	1,024	1,890	26,00	48,00	WRIL	2
OBPMH-PF-508	2,000	50,80	6-23	1,181	2,047	30,00	52,00	WRIL	2
OBPMH-PF-571	2,250	57,15	6-23	1,417	2,283	36,00	58,00	WRIL	2
OBPMH-PF-603	2,375	60,33	6-23	1,535	2,402	39,00	61,00	WRIL	2
OBPMH-PF-635	2,500	63,50	6-23	1,654	2,559	42,00	65,00	WRIL	2
OBPMH-PF-889	3,500	88,90	6-23	2,677	3,543	68,00	90,00	WRIL	2


CUTTERS AND INSERTS

REGULAR CUTTERS

FOR USE WITHOUT HOLDERS
BIT: HSS and HSS Cobalt



Cutters for MiniMill series



Cutters for HyperMill series

INSERTS

Inserts for use only with holders or special heads, all inserts made by KRAIS have ALNOVA coating by OERLIKON.



CI	A	B
mm	5	5

MAT: Carbide
Screw: MHS-2



CI7	A	B
mm	7	7

MAT: Carbide
Screw: MHS-2,7



CS	A	B
mm	9,5	9,5

MAT: HSS 6% Cobalt
Screw: MHS-4



CSZ	A	B
mm	5,8	9,5

MAT: HSS 6% Cobalt
Screw: MHS-2,5



CSS-CB	A	B
mm	6,3	9,5

MAT: HSS 6% Cobalt
Screw: MHS-2,5




CSS	A	B
mm	6,3	9,5

MAT: HSS 6% Cobalt
Screw: MHS-2,5




PO8	R
mm	8

MAT: Carbide
Screw: MHS-2,7




CDI	A	B
mm	18	9,5

MAT: HSS 6% Cobalt
Screw: MHS-4




CDI-CB	A	B
mm	18	9,5

MAT: HSS 6% Carbide
Screw: MHS-4




WRIL	A	B
mm	13,5	9,5

MAT: HSS 6% Cobalt
Screw: MHS-4




WRK	A	B
mm	10	9,5

MAT: HSS 6% Cobalt
Screw: MHS-4




WRI	A	B
mm	13,5	9,5

MAT: HSS 6% Cobalt
Screw: MHS-4



	A	B	R
CDJ-2.5*	18	9,5	2,5
CDJ-5	18	9,5	4,7
CDJ-8*	18	9,5	8,0

MAT: HSS 6% Cobalt
Screw: MHS-4
* na zamówienie




CSWR	A	B	R
mm	6,5	16,5	6

MAT: HSS 6% Cobalt
Screw: MHS-2,5




2CDI	A	B
mm	45	12,7

MAT: HSS 6% Cobalt
Screw: MHS-4



CDK	A	B
mm	25	9,5

MAT: HSS 6% Cobalt
Screw: MHS-4



2CDJ-5	A	B	R
mm	45	12,7	4,7

MAT: HSS 6% Cobalt
Screw: MHS-4




CSS-127	Min	Max
mm	9,5	15,0

MAT: HSS 6% Cobalt

HOLDERS**OUTSIDE BEVELING HOLDERS**

STANDARD: 37,5°; OTHER ANGLES ONLY ON REQUEST

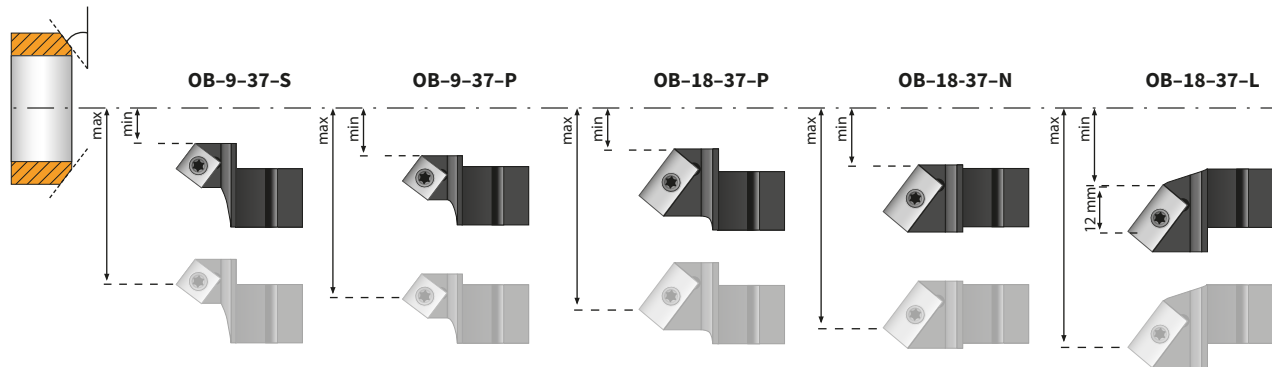


HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
OB-9-37-S	CS	60	16,00	26,00	0,630	1,024	20; 30; 37,5 ; 45
		88	16,00	51,00	0,630	2,008	20; 30; 37,5 ; 45
OB-9-37-P	CS	60	24,00	34,00	0,945	1,339	20; 30; 37,5 ; 45
		88	24,00	58,00	0,945	2,283	20; 30; 37,5 ; 45
		106	28,00	72,00	1,102	2,835	20; 30; 37,5 ; 45
		135	31,00	109,00	1,220	4,291	20; 30; 37,5 ; 45
OB-18-37-P	CDI	60	24,00	47,00	0,945	1,850	20; 30; 37,5 ; 45
		88	24,00	71,00	0,945	2,795	20; 30; 37,5 ; 45
		106	28,00	85,00	1,102	3,346	20; 30; 37,5 ; 45
		135	31,00	109,00	1,220	4,291	20; 30; 37,5 ; 45
		175	31,00	149,00	1,220	5,866	20; 30; 37,5 ; 45

HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
OB-18-37-N	CDI	60	34,00	56,00	1,339	2,205	20; 30; 37,5 ; 45
		88	34,00	80,00	1,339	3,150	20; 30; 37,5 ; 45
		106	38,00	94,00	1,496	3,701	20; 30; 37,5 ; 45
		114	43,00	101,00	1,693	3,976	20; 30; 37,5 ; 45
		135	43,00	122,00	1,693	4,803	20; 30; 37,5 ; 45
		175	43,00	162,00	1,693	6,378	20; 30; 37,5 ; 45
OB-18-37-L	CDI	60	40,00	63,00	1,575	2,480	20; 30; 37,5 ; 45
		88	40,00	87,00	1,575	3,425	20; 30; 37,5 ; 45
		106	44,00	101,00	1,732	3,976	20; 30; 37,5 ; 45
		114	47,00	104,00	1,850	4,094	20; 30; 37,5 ; 45
		135	47,00	125,00	1,850	4,921	20; 30; 37,5 ; 45
		175	47,00	165,00	1,850	6,496	20; 30; 37,5 ; 45

OUTSIDE BEVELING HOLDERS


Cutting edge length: 10 mm, standard angle: 37,5° (others on request)

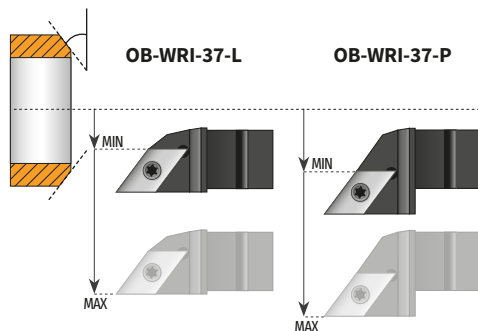

HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
WR-PM-R18-37-S	WRIL	64	22,00	66,00	0,866	2,598	30; 37,5
WR-PM-R18-37-N	WRIL	64	36,00	80,00	1,417	3,150	30; 37,5
WR-PM-R18-37-N	WRIL	99	36,00	116,00	1,417	4,567	30; 37,5

WELD REMOVAL HOLDERS


STANDARD: 37,5°; OTHER ANGLES ONLY ON REQUEST

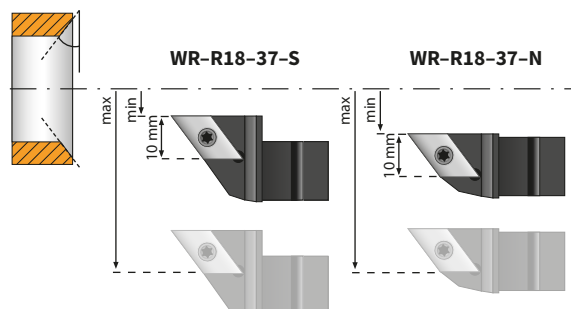

HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
WR-R18-37-S	WRI	60	15,50	36,00	0,610	1,417	20; 30; 37,5 ; 45
		88	15,50	61,00	0,610	2,402	20; 30; 37,5 ; 45
		106	19,50	75,00	0,768	2,953	20; 30; 37,5 ; 45
WR-R18-37-N	WRI	60	30,00	50,00	1,181	1,969	20; 30; 37,5 ; 45
		88	30,00	75,00	1,181	2,953	20; 30; 37,5 ; 45
		106	34,00	89,00	1,339	3,504	20; 30; 37,5 ; 45
		114	37,00	94,00	1,457	3,701	20; 30; 37,5 ; 45
		135	37,00	115,00	1,457	4,528	20; 30; 37,5 ; 45
		175	37,00	155,00	1,457	6,102	20; 30; 37,5 ; 45

INSIDE BEVELING HOLDERS

Standard: 37,5°; other angles only on request

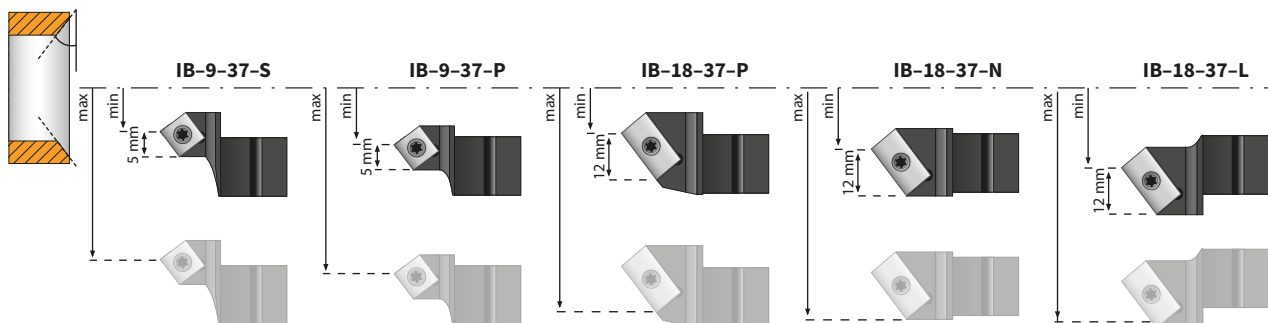


HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
IB-9-37-S	CS	60	29,00	39,00	1,142	1,535	20; 30; 37,5 ; 45
		88	29,00	63,00	1,142	2,480	20; 30; 37,5 ; 45
		106	33,00	77,00	1,299	3,031	20; 30; 37,5 ; 45
IB-9-37-P	CS	60	35,50	45,50	1,398	1,791	20; 30; 37,5 ; 45
		88	35,50	70,00	1,398	2,756	20; 30; 37,5 ; 45
		106	39,50	84,00	1,555	3,307	20; 30; 37,5 ; 45
IB-18-37-P	CDI	60	35,50	58,00	1,398	2,283	20; 30; 37,5 ; 45
		88	35,50	82,50	1,398	3,248	20; 30; 37,5 ; 45
		106	39,50	96,50	1,555	3,799	20; 30; 37,5 ; 45
		114	42,00	102,00	1,654	4,016	20; 30; 37,5 ; 45
		135	42,00	123,00	1,654	4,843	20; 30; 37,5 ; 45
		175	42,00	163,00	1,654	6,417	20; 30; 37,5 ; 45

HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
IB-18-37-N	CDI	60	44,50	67,50	1,752	2,657	20; 30; 37,5 ; 45
		88	44,50	92,00	1,752	3,622	20; 30; 37,5 ; 45
		106	48,50	106,00	1,909	4,173	20; 30; 37,5 ; 45
		114	51,00	111,00	2,008	4,370	20; 30; 37,5 ; 45
		135	51,00	132,00	2,008	5,197	20; 30; 37,5 ; 45
IB-18-37-L	CDI	175	51,00	172,00	2,008	6,772	20; 30; 37,5 ; 45
		60	53,00	76,00	2,087	2,992	20; 30; 37,5 ; 45
		88	53,00	100,00	2,087	3,937	20; 30; 37,5 ; 45
		106	57,00	114,00	2,244	4,488	20; 30; 37,5 ; 45
		114	60,00	120,00	2,362	4,724	20; 30; 37,5 ; 45
		135	60,00	141,00	2,362	5,551	20; 30; 37,5 ; 45
		175	60,00	181,00	2,362	7,126	20; 30; 37,5 ; 45

FACING HOLDERS

Standard: 90,0°

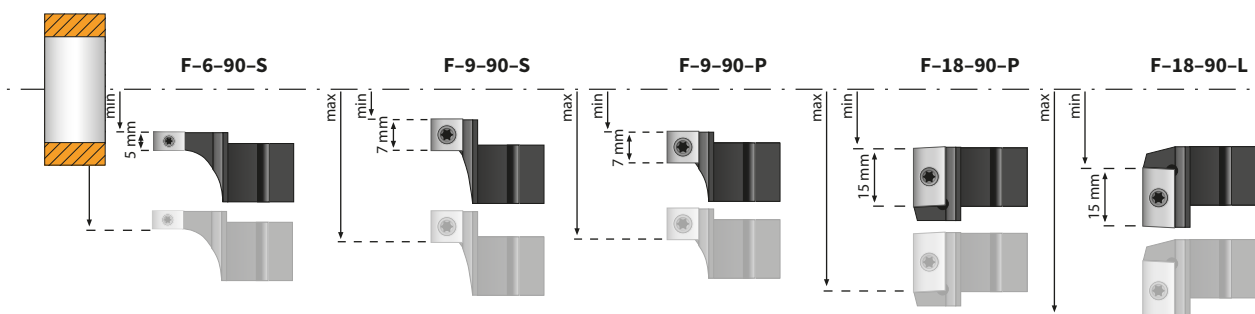


HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
F-6-90-S	CSS	60	14,50	24,50	0,571	0,965	90
F-9-90-S	CS	60	16,00	30,00	0,630	1,181	90
F-9-90-P	CS	60	24,00	38,00	0,945	1,496	90
		88	24,00	62,00	0,945	2,441	90
		106	28,00	75,00	1,102	2,953	90
		114	31,00	80,00	1,220	3,150	90
F-18-90-P	CDI	60	24,00	54,00	0,945	2,126	90
		88	24,00	79,00	0,945	3,110	90
		106	28,00	95,00	1,102	3,740	90

HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
F-18-90-P	CDI	114	31,00	98,00	1,220	3,858	90
		135	31,00	119,00	1,220	4,685	90
		175	31,00	159,00	1,220	6,260	90
F-18-90-L	CDI	60	33,00	62,00	1,299	2,441	90
		88	33,00	87,00	1,299	3,425	90
		106	37,00	101,00	1,457	3,976	90
		114	38,00	104,00	1,496	4,094	90
		135	38,00	125,00	1,496	4,921	90
		175	38,00	165,00	1,496	6,496	90

INSIDE BEVELING HOLDERS

Standard: 37,5°; other angles on on request

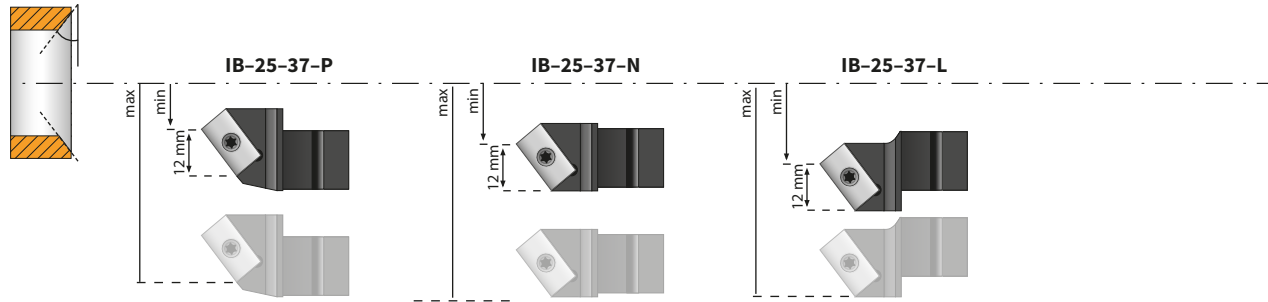


HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
IB-25-37-P	CDK	60	35,50	63,00	1,398	2,480	20; 30; 37,5 ; 45
		88	35,50	87,50	1,398	3,444	20; 30; 37,5 ; 45
		106	39,50	101,50	1,555	3,996	20; 30; 37,5 ; 45
		114	42,00	107,00	1,654	4,212	20; 30; 37,5 ; 45
		135	42,00	128,00	1,654	5,039	20; 30; 37,5 ; 45
		175	42,00	168,00	1,654	6,614	20; 30; 37,5 ; 45
IB-25-37-N	CDK	60	44,50	72,50	1,752	2,854	20; 30; 37,5 ; 45
		88	44,50	97,00	1,752	3,818	20; 30; 37,5 ; 45
		106	48,50	111,00	1,909	4,370	20; 30; 37,5 ; 45
		114	51,00	116,00	2,008	4,566	20; 30; 37,5 ; 45
		135	51,00	137,00	2,008	5,393	20; 30; 37,5 ; 45
		175	51,00	177,00	2,008	6,969	20; 30; 37,5 ; 45

HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
IB-25-37-L	CDK	60	53,00	81,00	2,087	3,188	20; 30; 37,5 ; 45
		88	53,00	105,00	2,087	4,133	20; 30; 37,5 ; 45
		106	57,00	119,00	2,244	4,685	20; 30; 37,5 ; 45
		114	60,00	125,00	2,362	4,921	20; 30; 37,5 ; 45
		135	60,00	146,00	2,362	5,748	20; 30; 37,5 ; 45
		175	60,00	186,00	2,362	7,322	20; 30; 37,5 ; 45

FACING HOLDERS

Standard: 90,0°

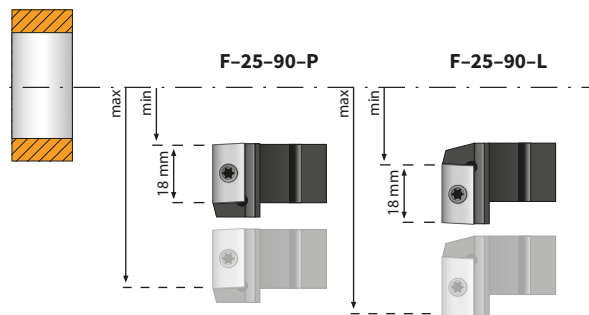


HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
F-25-90-P	CDK	60	24,00	61,00	0,945	2,401	90
		88	24,00	86,00	0,945	3,385	90
		106	28,00	102,00	1,102	4,015	90
	CDK	114	31,00	105,00	1,220	4,133	90
		135	31,00	126,00	1,220	4,960	90
		175	31,00	166,00	1,220	6,535	90
F-25-90-L	CDK	60	33,00	69,00	1,299	2,716	90
		88	33,00	94,00	1,299	3,700	90
		106	37,00	108,00	1,457	4,251	90
		114	38,00	111,00	1,496	4,370	90
		135	38,00	132,00	1,496	5,196	90
		175	38,00	172,00	1,496	6,771	90

PANELMILL & PANELMILL PF HOLDERS

It is highly recommended to use on this machine inserts made by KRAIS with ALNOVA coating by OERLIKON .

OUTSIDE BEVELING HOLDERS


Cutting edge length: 12 mm, standard angle: 37,5° (others on request)

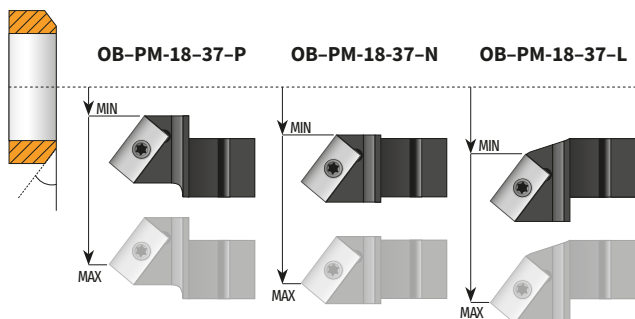

HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
OB-PM-18-37-P	CDI	64	0,00	47,00	0,000	1,850	30; 37,5
	CDI	99	0,00	85,00	0,000	3,346	30; 37,5
OB-PM-18-37-N	CDI	64	11,00	56,50	0,433	2,224	30; 37,5
	CDI	99	11,00	95,00	0,433	3,740	30; 37,5
OB-PM-18-37-L	CDI	64	20,00	65,50	0,787	2,579	30; 37,5
	CDI	99	20,00	104,00	0,787	4,094	30; 37,5

OUTSIDE BEVELING HOLDERS


Cutting edge length: 10 mm, standard angle: 37,5° (others on request)

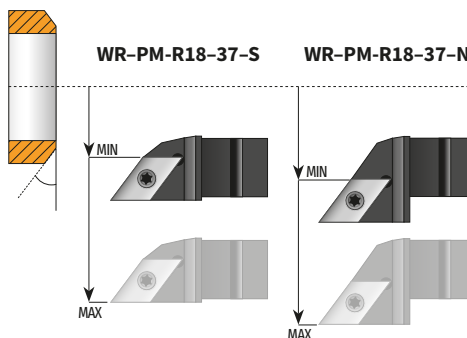

HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
WR-PM-R18-37-S	WRIL	64	22,00	66,00	0,866	2,598	30; 37,5
WR-PM-R18-37-N	WRIL	64	36,00	80,00	1,417	3,150	30; 37,5
WR-PM-R18-37-N	WRIL	99	36,00	116,00	1,417	4,567	30; 37,5

INSIDE BEVELING HOLDERS


Cutting edge length: 12 mm, standard angle: 37,5° (others on request)

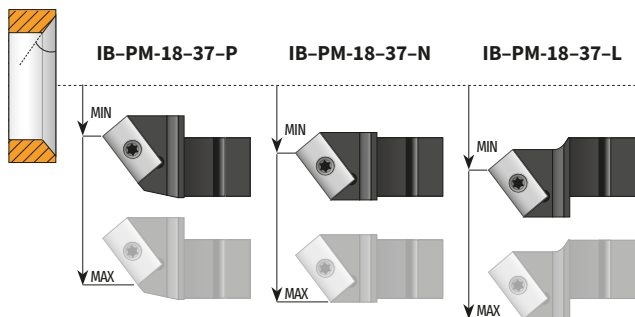

HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
IB-PM-18-37-P	CDI	64	10,00	56,00	0,394	2,205	30; 37,5
	CDI	99	10,00	95,00	0,394	3,740	30; 37,5
IB-PM-18-37-N	CDI	64	20,00	65,00	0,787	2,559	30; 37,5
	CDI	99	20,00	104,00	0,787	4,094	30; 37,5
IB-PM-18-37-L	CDI	64	35,00	79,00	1,378	3,110	30; 37,5
	CDI	99	35,00	115,00	1,378	4,528	30; 37,5

FACING HOLDERS

Cutting edge length: 15 mm, standard angle: 90,0°

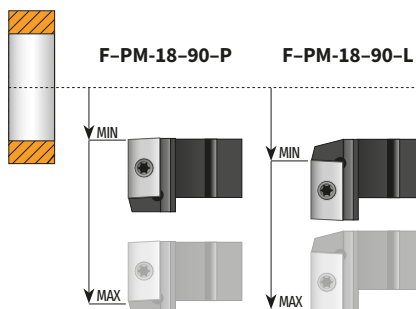

HOLDER NO.	BIT	HEAD	RANGE [MM]		RANGE [INCH]		DEGREE*
			MIN	MAX	MIN	MAX	
F-PM-18-90-P	CDI	64	0,00	53,00	0,000	2,087	90
	CDI	99	0,00	88,00	0,000	3,465	90
F-PM-18-90-L	CDI	64	20,00	80,00	0,787	3,150	90
	CDI	99	20,00	116,00	0,787	4,567	90

MINICUT 100 – HEAT EXCHANGER

MiniCut 100 is recommended for use in cutting alloy and ferrous tubing up to 1-1/4" O.D. Heavy wall tubing up to 10 BWG can be cut quickly and efficiently. Tool uses one cutting bit to cut any material tubes. The MiniCut 100 tool is equipped with star wheel feed for smooth, positive power transmission to the cutting bit.

Tool is available as electric version. MiniCut 100E covers the same tube sizes and comes with the same cutting head.



CUTTING RANGE		POWER		FREE SPEED		TORQUE	
Up to 1-1/4" OD		1,3 Hp		100 Rpm		105 Ft.Lbs	
Up to 31,7 mm						140 Nm	
AIR USE		WIDTH		HEIGHT		WEIGHT	
55 cfm	13 m³/min	2,32"	59 mm	13,1"	335 mm	9 Lbs	4,5 kg

MINICUT 300 - CONDENSER AND CHILLERS

The MiniCut 300 is recommended for use in cutting tubes within condensers, chillers and similar vessels with non-ferrous tubes. Tool uses one cutting bit, can cut 1" x 16 BWG brass tubes in just a few seconds. This machine is equipped with lever feed handle as standard. Tool is available as electric version. MiniCut 300E covers the same tube sizes and comes with the same cutting head.



CUTTING RANGE	POWER	FREE SPEED	TORQUE				
Up to 1" OD	1,3 Hp	300 Rpm	18 Ft.Lbs				
Up to 25,4 mm			24 Nm				
AIR USE	WIDTH	HEIGHT	WEIGHT				
55 cfm	13 m³/min	2,32"	59 mm	13,1"	335 mm	9 Lbs	4,5 kg

MINICUT 100 E

Tool is driven by electric motor made by Makita with 3 stage planetary gear box made by KRAIS and has variable speed control. Is interchangeable with pneumatic drive and can be purchased separately at any time.

Free Speed120 RPM

Power.....750 W

Torque360 Nm (266 Ft.Lbs)

Feed Stroke25 mm (1")

**MINICUT 300 E**

Tool is driven by electric motor made by Makita with 3 stage planetary gear box made by KRAIS and has variable speed control. Is interchangeable with pneumatic drive and can be purchased separately at any time.

Free Speed300 RPM

Power.....750 W

Torque122 Nm (92 Ft.Lbs)

Feed Stroke25 mm (1")



MINICUT 101/AF

MiniCut 101/AF tube cutting machine with Automatic Feed.

Alloy and ferrous tubes up to 1-1/4" with heavy wall up to 10 BWG can be cut quickly, consistently efficiently and effortlessly within 15-40 second depending on diameter and wall thickness. The MiniCut 101/AF tool is equipped with pneumatic/hydraulic automatic feed for positive power transmission to the cutting bit.



CUTTING RANGE		POWER	FREE SPEED	TORQUE		
Up to 1-1/4" OD		1,3 Hp	100 Rpm	105 Ft.Lbs		
Up to 31,7 mm				140 Nm		
AIR USE		DIMENSIONS		WEIGHT		
55 cfm	1,3 m³/min	2,44" x 14,96" x 21,25"		62 x 380 x 540 mm	25,35 Lbs	11,5 kg

MINICUT 101/AF-RB OPTION

The most convenient version can be delivered with reaction bar with two locking shafts. The reaction bar is universal and allows to precise tool alignment to the tubes pitch.

Dim: 250 x 330 x 54 mm / 9,84 x 14,96 x 21,25"
Weight: 13,5 kg / 29,76 Lbs

**TUBE CUTTERS FOR MINICUT MACHINES**

Standard length: 3", other available upon order: 6" and 14"

TUBE OD		TUBE GAUGE	TUBE ID	TOOL NO.	CUTTER BIT NO.	BODY DIAMETER	NUMBER OF BLADES
[INCH]	[MM]	[BWG]					
5/8	15,8	12-13	10,3 - 10,05	PTMC-158-3"-12	K-25186	10,00	1
5/8	15,8	14-15	11,66 - 12,22	PTMC-158-3"-14	K-25186	11,30	1
5/8	15,8	16-17	12,57 - 12,93	PTMC-158-3"-16	K-25186	12,20	1
5/8	15,8	18-19	13,40 - 13,74	PTMC-158-3"-18	K-25186	13,10	1
5/8	15,8	20-22	14,10 - 14,45	PTMC-158-3"-20	K-25186	13,80	1
3/4	19,0	14-15	14,80 - 15,40	PTMC-190-3"-14	K-25186	14,50	1
3/4	19,0	16-17	15,75 - 16,10	PTMC-190-3"-16	K-25186	15,40	1
3/4	19,0	18-19	16,56 - 16,90	PTMC-190-3"-18	K-25186	16,15	1
3/4	19,0	20-22	17,27 - 17,63	PTMC-190-3"-20	K-25186	17,00	1
7/8	22,2	10-11	15,42 - 16,13	PTMC-222-3"-10	K-25194	15,00	1
7/8	22,2	12-13	16,69 - 17,40	PTMC-222-3"-12	K-25194	16,20	1
7/8	22,2	14-15	18,01 - 18,57	PTMC-222-3"-14	K-25194	17,60	1
7/8	22,2	16-17	18,92 - 19,28	PTMC-222-3"-16	K-25194	18,50	1
7/8	22,2	18-20	19,74 - 20,42	PTMC-222-3"-18	K-25194	19,40	1
1	25,4	8-9	17,02 - 17,88	PTMC-254-3"-8	K-25199	16,60	1
1	25,4	10-11	18,59 - 19,30	PTMC-254-3"-10	K-25199	18,20	1
1	25,4	12-13	19,86 - 20,57	PTMC-254-3"-12	K-25199	19,40	1


TUBE OD		TUBE GAUGE	TUBE ID	TOOL NO.	CUTTER BIT NO.	BODY DIAMETER	NUMBER OF BLADES
[INCH]	[MM]	[BWG]					
1	25,4	14-15	21,18 - 21,74	PTMC-254-3"-14	K-25199	20,80	1
1	25,4	16-17	22,10 - 22,45	PTMC-254-3"-16	K-25199	21,70	1
1	25,4	18-19	22,91 - 23,27	PTMC-254-3"-18	K-25199	22,50	1
1	25,4	20-22	23,62 - 23,89	PTMC-254-3"-20	K-25199	23,20	1
1-1/8	28,5	13-14	23,75 - 24,36	PTMC-285-3"-13	K-25199	23,40	1
1-1/8	28,5	15-16	24,92 - 25,27	PTMC-285-3"-14	K-25199	24,50	1
1-1/8	28,5	17-18	25,63 - 26,09	PTMC-285-3"-17	K-25199	25,10	1
1-1/4	31,7	12-13	26,21 - 26,92	PTMC-317-3"-12	K-25206	25,80	1
1-1/4	31,7	14-15	27,53 - 28,09	PTMC-317-3"-14	K-25206	27,10	1
1-1/4	31,7	16-17	28,45 - 28,80	PTMC-317-3"-16	K-25206	28,00	1
1-1/4	31,7	18-20	29,26 - 29,92	PTMC-317-3"-20	K-25206	28,80	1
1-1/2	38,1	8-9	29,72 - 30,58	PTMC-381-3"-8	K-25206	29,30	1
1-1/2	38,1	10-11	31,29 - 32,00	PTMC-381-3"-10	K-25206	30,08	1
1-1/2	38,1	12-13	32,56 - 33,27	PTMC-381-3"-12	K-25206	32,10	1
1-1/2	38,1	14-15	33,88 - 34,44	PTMC-381-3"-14	K-25206	33,40	1
1-1/2	38,1	16-17	34,80 - 35,15	PTMC-381-3"-16	K-25206	34,40	1
1-1/2	38,1	18-20	35,51 - 36,32	PTMC-381-3"-18	K-25206	35,10	1

KDM PNEUMATIC DRILL

KRAIS KDM is high torque, pneumatic, low-speed drilling machine for any application. Recommended for use with KRAIS PTTC Tube Cutters, PTTT Tube Trimmers, TEF Tube End Facers and JGS Grooving Tools.

MODEL	RPM	TORQUE		POWER	AIR USE		WEIGHT	
		NM	FT/LBS	HP	CFM	L/MIN	KG	LBS
70-KDM	70	188	138	1,3	48	1200	6,5	14,3
130-KDM	130	105	78	1,3	48	1200	6,5	14,3
180-KDM	180	79	58	1,3	48	1200	6,5	14,3
400-KDM	400	36	27	1,3	48	1200	6,5	14,3

KDM Pneumatic Drill can be used as a portable drive for many typical tube works. In connection with proper tools offers a wide range of uses.

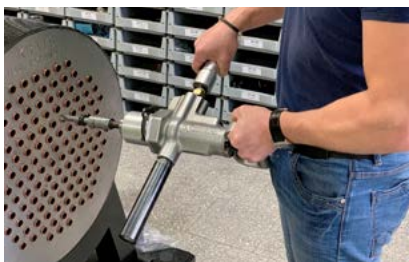

PTTC UNIVERSAL



This tools are used with KDM Pneumatic drill

TUBE OD		TUBE GAUGE	TOOL NO.	CUTTER BIT NO.	NUMBER OF BLADES	DRIVE SHANK
[INCH]	[MM]	[BWG]				
5/8	15,8	16-22	PTTC-U-158	K-25186	1	HEX-1/2"
3/4	19	14-22	PTTC-U-190	K-25186	1	HEX-1/2"
7/8	22,2	11-22	PTTC-U-222	K-25194	1	HEX-1/2"
1	25,4	11-13	PTTC-U-222	K-25194	1	HEX-1/2"
		14-22	PTTC-U-254	K-25199	2	HEX-1/2"
1-1/4	31,7	14-22	PTTC-U-317	K-25206	2	HEX-5/8"
1-1/2	38,1	10-20	PTTC-U-381	K-25206	2	HEX-5/8"
2	50,8	8-20	PTTC-U-508	K-25221	2	SQ-3/4"
2-1/2	63,5	8-12	PTTC-U-635	K-25223	2	SQ-3/4"

PTTT - TUBE TRIMMER



This tools are used with KDM Pneumatic drill

TUBE OD		TUBE GAUGE	TOOL NO.	CUTTER BIT NO.	NUMBER OF BLADES	DRIVE SHANK
[INCH]	[MM]	[BWG]				
5/8	15,8	16-22	PTTT-158	K-25186	1	HEX-1/2"
3/4	19	14-22	PTTT-190	K-25186	1	HEX-1/2"
7/8	22,2	11-22	PTTT-222	K-25194	1	HEX-1/2"
1	25,4	11-13	PTTT-222	K-25194	1	HEX-1/2"
		14-22	PTTT-254	K-25199	2	HEX-1/2"
1-1/4	31,7	14-22	PTTT-317	K-25206	2	HEX-5/8"
1-1/2	38,1	10-20	PTTT-381	K-25206	2	HEX-5/8"
2	50,8	8-20	PTTT-508	K-25221	2	SQ-3/4"
2-1/2	63,5	8-12	PTTT-635	K-25223	2	SQ-3/4"

SOLID BODY PTTC

The PTTC cutter blade depth can be adjusted to allow the tube to be cut through. Tool uses one or two blades made ut of the HSS. The front pilot mounted under the cutter keeps the cutter in the center of the tube and prevent the cutter to be jammed as the chips must go forward into the tube. Also available as tube trimmer and push type tube trimmer.



This tools are used with KDM Pneumatic drill

TUBE OD		TUBE GAUGE	TUBE ID [MM]		TUBE ID [INCH]		CUTTER BODY DIAMETER	TOOL NO.	CUTTER BIT NO.	NUMBER OF BLADES	DRIVE SHANK
[INCH]	[MM]	[BWG]	MIN	MAX	MIN	MAX					
3/8"	9,5	22-24	8,10	8,40	0,319	0,331	7,8	PTTC-95-3"-22	K-25210-78	1	HEX-1/2"
1/2"	12,7	14-15	8,50	9,04	0,335	0,356	8,2	PTTC-127-3"-14	K-25210	1	HEX-1/2"
		16-17	9,40	9,75	0,370	0,384	9,2	PTTC-127-3"-16	K-25210	1	HEX-1/2"
5/8"	15,8	12-13	10,30	10,05	0,406	0,396	10	PTTC-158-3"-12	K-25186-A	1	HEX-1/2"
		14-15	11,66	12,22	0,459	0,481	11,3	PTTC-158-3"-14	K-25186-B	1	HEX-1/2"
		16-17	12,57	12,93	0,495	0,509	12,2	PTTC-158-3"-16	K-25186-B	1	HEX-1/2"
		18-19	13,40	13,74	0,528	0,541	13,1	PTTC-158-3"-18	K-25186	1	HEX-1/2"
		20-22	14,10	14,45	0,555	0,569	13,8	PTTC-158-3"-20	K-25186	1	HEX-1/2"
3/4"	19	14-15	14,80	15,40	0,583	0,606	14,5	PTTC-190-3"-14	K-25186	1	HEX-1/2"
		16-17	15,75	16,10	0,620	0,634	15,4	PTTC-190-3"-16	K-25186	1	HEX-1/2"
		18-19	16,56	16,90	0,652	0,665	16,15	PTTC-190-3"-18	K-25186	1	HEX-1/2"
		20-22	17,27	17,63	0,680	0,694	17	PTTC-190-3"-20	K-25186	1	HEX-1/2"
7/8"	22,2	10-11	15,42	16,13	0,607	0,635	15	PTTC-222-3"-10	K-25194	1	HEX-1/2"
		12-13	16,69	17,40	0,657	0,685	16,2	PTTC-222-3"-12	K-25194	1	HEX-1/2"
		14-15	18,01	18,57	0,709	0,731	17,6	PTTC-222-3"-14	K-25194	1	HEX-1/2"
		16-17	18,92	19,28	0,745	0,759	18,5	PTTC-222-3"-16	K-25194	1	HEX-1/2"
1"	25,4	18-20	19,74	20,42	0,777	0,804	19,4	PTTC-222-3"-18	K-25194	1	HEX-1/2"
		8-9	17,02	17,88	0,670	0,704	16,6	PTTC-254-3"-8	K-25199-A	1	HEX-1/2"
		10-11	18,59	19,30	0,732	0,760	18,2	PTTC-254-3"-10	K-25199-B	1	HEX-1/2"
		12-13	19,86	20,57	0,782	0,810	19,4	PTTC-254-3"-12	K-25199-B	1	HEX-1/2"
		14-15	21,18	21,74	0,834	0,856	20,8	PTTC-254-3"-14	K-25199	1	HEX-1/2"
		16-17	22,10	22,45	0,870	0,884	21,7	PTTC-254-3"-16	K-25199	1	HEX-1/2"
		18-19	22,91	23,27	0,902	0,916	22,5	PTTC-254-3"-18	K-25199	1	HEX-1/2"
		20-22	23,62	23,89	0,930	0,941	23,2	PTTC-254-3"-20	K-25199	1	HEX-1/2"
1-1/8"	28,5	13-14	23,75	24,36	0,935	0,959	23,4	PTTC-285-3"-13	K-25199	1	HEX-5/8"
		15-16	24,92	25,27	0,981	0,995	24,5	PTTC-285-3"-14	K-25199	1	HEX-5/8"
		17-18	25,63	26,09	1,009	1,027	25,1	PTTC-285-3"-17	K-25199	1	HEX-5/8"
1-1/4"	31,7	12-13	26,21	26,92	1,032	1,060	25,8	PTTC-317-3"-12	K-25206	1	HEX-5/8"
		14-15	27,53	28,09	1,084	1,106	27,1	PTTC-317-3"-14	K-25206	1	HEX-5/8"
		16-17	28,45	28,80	1,120	1,134	28	PTTC-317-3"-16	K-25206	1	HEX-5/8"
		18-20	29,26	29,92	1,152	1,178	28,8	PTTC-317-3"-20	K-25206	1	HEX-5/8"
1-1/2"	38,1	8-9	29,72	30,58	1,170	1,204	29,3	PTTC-381-3"-8	K-25206	1	HEX-5/8"
		10-11	31,29	32,00	1,232	1,260	30,08	PTTC-381-3"-10	K-25206	1	HEX-5/8"
		12-13	32,56	33,27	1,282	1,310	32,1	PTTC-381-3"-12	K-25206	1	HEX-5/8"
		14-15	33,88	34,44	1,334	1,356	33,4	PTTC-381-3"-14	K-25206	1	HEX-5/8"
		16-17	34,80	35,15	1,370	1,384	34,4	PTTC-381-3"-16	K-25206	1	HEX-5/8"
		18-20	35,51	36,32	1,398	1,430	35,1	PTTC-381-3"-18	K-25206	1	HEX-5/8"
2"	50,8	8	42,42		1,670		42	PTTC-508-3"-8	K-25221	1	SQ-3/4"
		9	43,28		1,704		42,8	PTTC-508-3"-9	K-25221	1	SQ-3/4"
		10	44,00		1,732		43,6	PTTC-508-3"-10	K-25221	1	SQ-3/4"
		11	44,70		1,760		44,3	PTTC-508-3"-11	K-25221	1	SQ-3/4"
		12	45,26		1,782		44,8	PTTC-508-3"-12	K-25221	1	SQ-3/4"
		13	46,00		1,811		45,6	PTTC-508-3"-13	K-25221	1	SQ-3/4"
		14	46,60		1,835		46,2	PTTC-508-3"-14	K-25221	1	SQ-3/4"
		15	47,14		1,856		46,7	PTTC-508-3"-15	K-25221	1	SQ-3/4"
		16-20	47,50	48,94	1,870	1,927	47,1	PTTC-508-3"-16	K-25221	1	SQ-3/4"
2-1/2"	63,5	8	55,12		2,170		54,7	PTTC-635-3"-8	K-25223	1	SQ-3/4"
		9	55,98		2,204		55,6	PTTC-635-3"-9	K-25223	1	SQ-3/4"
		10	56,70		2,232		56,3	PTTC-635-3"-10	K-25223	1	SQ-3/4"
		11	57,40		2,260		57	PTTC-635-3"-11	K-25223	1	SQ-3/4"
		12	57,96		2,282		57,5	PTTC-635-3"-12	K-25223	1	SQ-3/4"

ORTC - ONE REVOLUTION TUBE CUTTER

Tools designed for cutting both ferrous and non-ferrous tubes commonly found in heat exchangers, boilers and condensers. Standard tool length is adjustable from 1"-6" (25-155 mm). Longer reach tools are available in 10" (254 mm) increments. The tool is designed to be used with a hand or ratchet wrench only. Impact wrenches should never be used with these tools. The Cutting of the tube is based on the eccentric principle, where the cutter bit moves out to the tube wall as the cutter is rotated. Continued clockwise rotation will puncture and cut the tube in one revolution. Simply rotating the tool counterclockwise closes the bit and the tool can be removed from the tube.



TUBE OD		TUBE GAUGE	TUBE ID				TOOL NO.	TOOL BIT
			[MM]		[INCH]			
[INCH]	[MM]	[BWG]	MIN	MAX	MIN	MAX		
1/2	12,70	18-19	10,20	10,70	0,402	0,421	ORTC-100	N-625-4
		20	11,00	11,30	0,433	0,445	ORTC-108	N-625-4
5/8	15,88	14	11,40	11,90	0,449	0,469	ORTC-113	N-625-3
		15-16	12,00	12,90	0,472	0,508	ORTC-119	N-625-3
		17-18	12,70	13,50	0,500	0,531	ORTC-123	N-625-2
		19-20	13,50	14,20	0,531	0,559	ORTC-131	N-625-2
		22	14,00	14,70	0,551	0,579	ORTC-139	N-750-2
3/4	19,05	14-15	14,70	15,50	0,579	0,610	ORTC-145	N-750-2
		16	15,20	16,50	0,598	0,650	ORTC-151	N-750-2
		17-18	15,90	16,50	0,626	0,650	ORTC-153	N-750-2
		19-20	16,70	17,50	0,657	0,689	ORTC-163	N-1000-1
7/8	22,23	14-15	17,80	18,50	0,701	0,728	ORTC-174	N-1000-1
		16-17	18,80	19,50	0,740	0,768	ORTC-184	N-1000-1
		18	19,30	20,00	0,760	0,787	ORTC-190	N-1000-1
		19-20	19,80	20,60	0,780	0,811	ORTC-193	N-1000-2
1	25,40	12	19,80	20,60	0,780	0,811	ORTC-193	N-1000-2
		14	20,80	21,60	0,819	0,850	ORTC-205	N-1000-2
		15	21,30	22,10	0,839	0,870	ORTC-210	N-1000-2
		16-17	21,80	22,60	0,858	0,890	ORTC-215	N-1000-2
		18-20	22,60	23,10	0,890	0,909	ORTC-223	N-1000-2
		22	23,90	24,60	0,941	0,969	ORTC-232	N-1000-2
1-1/4	31,75	10-11	24,90	25,60	0,980	1,008	ORTC-245	N-1000-2
		12	25,90	26,70	1,020	1,051	ORTC-255	N-1000-2
		13-14	26,70	27,40	1,051	1,079	ORTC-264	N-1000-2
		15-16	27,90	28,70	1,098	1,130	ORTC-274	N-1000-2
		17-19	28,70	29,60	1,130	1,165	ORTC-283	N-1000-2

TUBE OD		TUBE GAUGE	TUBE ID				TOOL NO.	TOOL BIT		
			[MM]		[INCH]					
[INCH]	[MM]	[BWG]	MIN	MAX	MIN	MAX				
1-1/2	38,10	10-11	31,30	32,10	1,232	1,264	ORTC-309	N-1500-1		
		12-13	32,50	33,30	1,280	1,311	ORTC-320	N-1500-1		
		14-15	33,80	34,50	1,331	1,358	ORTC-333	N-1500-1		
		16-17	34,50	35,30	1,358	1,390	ORTC-339	N-1500-1		
		18-19	35,30	36,10	1,390	1,421	ORTC-350	N-1500-1		
1-3/4	44,45	10-11	37,00	38,50	1,457	1,516	ORTC-369	N-1500-1		
		12-14	38,80	40,30	1,528	1,587	ORTC-383	N-1500-1		
		15-16	40,80	41,20	1,606	1,622	ORTC-403	N-1500-1		
		17-18	41,30	42,00	1,626	1,654	ORTC-410	N-1500-1		
2	50,80	10	44,00	44,00	1,732	1,732	ORTC-435	N-1500-1		
		11	44,70	44,70	1,760	1,760	ORTC-442	N-1500-1		
		12-13	45,00	46,00	1,772	1,811	ORTC-447	N-1500-1		
		14-15	46,20	48,20	1,819	1,898	ORTC-457	N-1500-1		
		16-17	47,20	48,20	1,858	1,898	ORTC-468	N-1500-1		
		18-19	48,00	49,00	1,890	1,929	ORTC-476	N-1500-1		
		2-1/4	57,15	10	50,30	50,30	1,980	1,980	ORTC-497	N-2250-1
				11	51,00	51,00	2,008	2,008	ORTC-505	N-2250-1
12-13	51,60			52,30	2,031	2,059	ORTC-511	N-2250-1		
14-15	52,90			53,50	2,083	2,106	ORTC-524	N-2250-1		
16-17	53,80			54,80	2,118	2,157	ORTC-533	N-2250-1		
18-19	54,60			55,60	2,150	2,189	ORTC-541	N-2250-1		
2-1/2	63,50	10	56,70	56,70	2,232	2,232	ORTC-562	N-2250-1		
		11	57,40	57,40	2,260	2,260	ORTC-569	N-2250-1		
		12-13	57,60	58,60	2,268	2,307	ORTC-572	N-2250-1		
		14-15	58,90	60,00	2,319	2,362	ORTC-585	N-2250-1		
		16-17	60,00	61,00	2,362	2,402	ORTC-586	N-2250-1		
		18-19	60,70	61,70	2,390	2,429	ORTC-602	N-2250-1		

ORTCC - ONE REVOLUTION TUBE CUTTER VERSION C

One Revolution Tube Cutter version C is used for piercing heavy wall, carbon steel tubes for ventilation prior to plugging the leaky tubes. Delivered in two length version 6" and 12".

TUBE OD		TUBE GAUGE	TOOL NO.	TOOL BIT
[INCH]	[MM]	[BWG]		
3/4	19,0	10	ORTCC-119	N-625-3
		11	ORTCC-123	N-625-2
		12	ORTCC-131	N-625-2
		13	ORTCC-139	N-750-2
		14	ORTCC-145	N-750-2
7/8	22,2	10	ORTCC-151	N-750-2
		12	ORTCC-153	N-750-2
		13	ORTCC-163	N-1 000-1
1	25,4	10	ORTCC-174	N-1000-1
		11	ORTCC-184	N-1000-1
		12	ORTCC-190	N-1000-1
		13	ORTCC-193	N-1000-2
		14	ORTCC-205	N-1000-2

1WTTC-1000 WHEEL TYPE TUBE CUTTER


The 1WTTC-1000 greatly reduces cutting time by utilizing the special 1 point self-centering cutter wheel design and works with 3/4", thru 1-1/4" O.D. tubes (after changing cutter body wheels and pilots). The tool does not create any chips during the cutting process!



CUTTING RANGE		REACH		POWER	FREE SPEED	TORQUE	
5/8" to 4"		3" & 6"		1,3 Hp	100 Rpm	105 Ft.Lbs	
15,8 - 101,6 mm		76,2 & 152,4 mm		0,97 kW		140 Nm	
AIR USE		WIDTH		HEIGHT		WEIGHT	
55 cfm	1,3 m³/min	2,32"	59 mm	13,1"	335 mm	15 Lbs	6,8 kg

TRIMMING ATTACHMENT

Tube projection can be cut quickly without generating any chips!

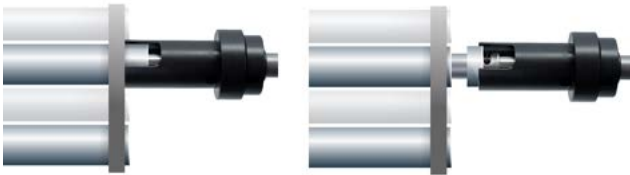

OPTIONAL FEED SYSTEMS



Lever feed handle



Crank arm with double feed stroke

TUBE OD		TUBE GAUGE	TOOL NR	WHEEL HOLDER	WHEEL PIN	CUTTING			TRIMMING			BODY
[INCH]	[MM]	[BWG]				CUTTER WHEEL	PILOT	THRUST COLLAR	TRIMMING COLLAR	PILOT	PILOT EXTENSION	
3/4	19,05	13	1WTTC-750-13	1CCWH-190-3	CP-19	CW-20	Solid Body	SWTC-750-13	WTTA-750-13	Solid body	Solid body	1WTB-750-13
		14	1CCWH-190	CP-20	CW-21	P-008	SWTC-750	WTTA-750	T-8	PE-1WTTC-190	1WTB-750	
		15			CW-21	P-009			T-9			
		16			CW-21	P-010			T-10			
		17			CW-21	P-011			T-11			
		18			CW-21	P-012			T-12			
		19	1CCWH-19-2		CW-21	P-013			T-13			
		20			CW-21	P-014			T-14			
		21			CW-21	P-015			T-15			
		22			CW-21	P-016			T-16			
		23			CW-21	P-017			T-17			
		24			CW-31	P-018			T-18			
7/8	22,23	14	1WTTC-875		1CCWH-222	CP-21			CW-25			P-019
		15		CW-25			P-020	T-20				
		16		CW-25			P-021	T-21				
		17		CW-25			P-022	T-22				
		18		1CCWH-222-2	CW-25		P-023	T-23				
		19			CW-25		P-024	T-24				
		20			CW-25		P-025	T-25				
		21			CW-25		P-026	T-26				
		22			CW-25		P-027	T-27				
		23			CW-25		P-028	T-28				

* For 3/4" GA13 the cutting machine needs complete solid body tube cutter 1WTTC-750-13

TUBE OD		TUBE GAUGE	TOOL NR	WHEEL HOLDER	WHEEL PIN	CUTTING			TRIMMING			BODY
[INCH]	[MM]	[BWG]				CUTTER WHEEL	PILOT	THRUST COLLAR	TRIMMING COLLAR	PILOT	PILOT EXTENSION	
1	25.40	12	1WTTC-1000	1CCWH-254	CP-25	CW-31	P-029-1	SWTC-1000	WTTA-1000	T-29-1	PE-1WTTC-254	1WTB-1000
		CW-31				P-029-2	T-29-2					
		CW-31				P-029	T-29					
		CW-31				P-030	T-30					
		CW-31				P-031	T-31					
		CW-31				P-032	T-32					
		18		1CCWH-254-2		CW-31	P-033			T-33		
		19				CW-31	P-034			T-34		
		20				CW-31	P-035			T-35		
		21				CW-31	P-036			T-36		
		22				CW-31	P-037			T-37		
		23				CW-31	P-038			T-38		
1 1/8	28.58	24	1WTTC-1125	1CCWH-286	CP-25	CW-31	P-039	SWTC-1125	WTTA-1125	T-39	PE-1WTTC-286	1WTB-1125
		CW-34				P-040-1	T-40-1					
		CW-34				P-040-2	T-40-2					
		CW-34				P-040	T-40					
		CW-34				P-041	T-41					
		CW-34				P-042	T-42					
		18		1CCWH-286-2		CW-34	P-043			T-43		
		19				CW-34	P-044			T-44		
		20				CW-34	P-045			T-45		
		21				CW-34	P-046			T-46		
		22				CW-34	P-047			T-47		
		23				CW-34	P-048			T-48		
1 1/4	31.75	24	1WTTC-1250	1CCWH-317	CP-30	CW-34	P-049	SWTC-1250	WTTA-1125	T-49	PE-1WTTC-286	1WTB-1125
		CW-34				P-050	T-50					
		CW-37				P-051	T-51					
		CW-37				P-052	T-52					
		CW-37				P-053	T-53					
		CW-37				P-054	T-54					
		18		1CCWH-317-2		CW-37	P-055			T-55		
		19				CW-37	P-056			T-56		
		20				CW-37	P-057			T-57		
		21				CW-37	P-058			T-58		
		22				CW-37	P-059			T-59		
		23				CW-37	P-060			T-60		
1 1/2	38,1	24	1WTTC-1250	1CCWH-317-2	CP-30	CW-37	P-061	SWTC-1250	WTTA-1250	T-61	PE-1WTTC-317	1WTB-1250
		CW-37				P-062	T-62					
		CW-37				P-063	T-63					
		CW-41				P-064	T-64					
		CW-41				P-065	T-65					
		CW-41				P-066	T-66					
		17		1CCWH-381		CW-41	P-067			T-67		
		18				CW-41	P-068			T-68		
		19				CW-41	P-069			T-69		
		20				CW-41	P-070			T-70		
		21				CW-41	P-071			T-71		
		22				CW-41	P-072			T-72		
1 1/2	38,1	23	1WTTC-1500	1CCWH-383	CP-4	CW-41	P-073	SWTC-1500	WTTA-1500	T-73	PE-1WTTC-381	1WBT-1500
		CW-41				P-074	T-74					
		CW-41				P-075	T-75					
		CW-41				P-076	T-76					
		CW-41				P-077	T-77					
		CW-41				P-078	T-78					

TUBE OD		TUBE GAUGE	TOOL NR	WHEEL HOLDER	WHEEL PIN	CUTTING			TRIMMING			BODY	
[INCH]	[MM]	[BWG]				CUTTER WHEEL	PILOT	THRUST COLLAR	TRIMMING COLLAR	PILOT	PILOT EXTENSION		
1 3/4	44,45	8	1WTTC-1750	1CCWH-444	CP-4	CW-45	P-079	SWTC-1750	WTTA-1750	T-79	PE-1WTTC-444	1WBT-1750	
		CW-45				P-080	T-80						
		CW-45				P-081	T-81						
		CW-45				P-082	T-82						
		CW-45				P-083	T-83						
		CW-45				P-084	T-84						
		14		1CCWH-445		CW-45	P-085			T-85			
		15				CW-45	P-086			T-86			
		16				CW-45	P-087			T-87			
		17				CW-45	P-088			T-88			
		18				CW-45	P-089			T-89			
		19				CW-45	P-090			T-90			
2	50,8	6	1WTTC-2000	1CCWH-508	CP-4	CW-51	P-092	SWTC-2000	WTTA-2000	T-92	PE-1WTTC-508	1WBT-2000	
		CW-51				P-093	T-93						
		CW-51				P-094	T-94						
		CW-51				P-095	T-95						
		CW-51				P-096	T-96						
		CW-51				P-097	T-97						
		12		1CCWH-506		CW-51	P-098			T-98			
		13				CW-51	P-099			T-99			
		14				CW-51	P-100			T-100			
		15				CW-51	P-101			T-101			
		16				CW-51	P-102			T-102			
		17				1CCWH-504	CW-51			P-103			T-103
18	CW-51	P-104	T-104										
19	CW-51	P-105	T-105										
20	CW-51	P-106	T-106										
2 1/4	57,1	6	1WTTC-2000	1CCWH-571	CP-4		CW-51	P-107	SWTC-2250	WTTA-2250	T-107	PE-1WTTC-508	1WBT-2000
		CW-51					P-108	T-108					
		CW-51				P-109	T-109						
		CW-51				P-110	T-110						
		CW-51				P-111	T-111						
		CW-51				P-112	T-112						
		12		1CCWH-573		CW-51	P-113	T-113					
		13				CW-51	P-114	T-114					
		14				CW-51	P-115	T-115					
		15				CW-51	P-116	T-116					
		16				CW-51	P-117	T-117					
		17				1CCWH-575	CW-51	P-118			T-118		
18	CW-51	P-119	T-119										
19	CW-51	P-120	T-120										
20	CW-51	P-121	T-121										

TUBE OD		TUBE GAUGE	TOOL NR	WHEEL HOLDER	WHEEL PIN	CUTTING			TRIMMING			BODY
[INCH]	[MM]	[BWG]				CUTTER WHEEL	PILOT	THRUST COLLAR	TRIMMING COLLAR	PILOT	PILOT EXTENSION	
2,5	63,5	6	1WTTC-2000	1CCWH-635	CP-4	CW-51	P-122	SWTC-2500	WTTA-2500	T-122	PE-1WTTC-508	1WBT-2000
		7				CW-51	P-123			T-123		
		8				CW-51	P-124			T-124		
		9				CW-51	P-125			T-125		
		10				CW-51	P-126			T-126		
		11				CW-51	P-127			T-127		
		12				CW-51	P-128			T-128		
		13		1CCWH-637		CW-51	P-129			T-129		
		14				CW-51	P-130			T-130		
		15				CW-51	P-131			T-131		
		16		1CCWH-639		CW-51	P-132			T-132		
		17				CW-51	P-133			T-133		
		18				CW-51	P-134			T-134		
		19				CW-51	P-135			T-135		
		20				CW-51	P-136			T-136		
3	76,2	6	1WTTC-2000		1CCWH-762	CP-4	CW-51	P-137	SWTC-3000	WTTA-3000	T-137	PE-1WTTC-508
		7		CW-51			P-138	T-138				
		8		CW-51			P-139	T-139				
		9		CW-51			P-140	T-140				
		10		CW-51			P-141	T-141				
		11		CW-51			P-142	T-142				
		12		1CCWH-764	CW-51		P-143	T-143				
		13			CW-51		P-144	T-144				
		14			CW-51		P-145	T-145				
		15		1CCWH-766	CW-51		P-146	T-146				
		16			CW-51		P-147	T-147				
		17			CW-51		P-148	T-148				
		18			CW-51		P-149	T-149				
		19			CW-51		P-150	T-150				
		20			CW-51		P-151	T-151				
4	101,6	6	1WTTC-2000	1CCWH-101	CP-4	CW-51	P-152	SWTC-4000	WTTA-4000	T-152	PE-1WTTC-508	1WBT-2000
		7				CW-51	P-153			T-153		
		8				CW-51	P-154			T-154		
		9				CW-51	P-155			T-155		
		10				CW-51	P-156			T-156		
		11				CW-51	P-157			T-157		
		12		1CCWH-103		CW-51	P-158			T-158		
		13				CW-51	P-159			T-159		
		14				CW-51	P-160			T-160		
		15		1CCWH-105		CW-51	P-161			T-161		
		16				CW-51	P-162			T-162		
		17				CW-51	P-163			T-163		
		18				CW-51	P-164			T-164		
		19				CW-51	P-165			T-165		
		20				CW-51	P-166			T-166		

2WTTC-1500 TWO WHEELS TYPE TUBE CUTTER

The 2WTTC-1500 greatly reduces cutting time by utilizing the special 2 point self-centering cutter wheel design and works from 1-1/2" up to 2" O.D. tubes. The tool does not create any chips during the cutting process!



CUTTING RANGE		REACH		POWER		FREE SPEED		TORQUE	
1-1/2" to 2"		4"		1,3 Hp		100 Rpm		105 Ft.Lbs	
38,1 - 50,8 mm		101,6 mm		0,97 kW				140 Nm	
AIR USE			WIDTH		HEIGHT			WEIGHT	
55 cfm	1,3 m³/min	2,32"	59 mm	13,1"	335 mm	21 Lbs	9,5 kg		


OPTIONAL FEED SYSTEMS



Lever feed handle



Crank arm single feed stroke



Tube cutting and tube trimming setup-set-up

ALL-PURPOSE TOOL

TUBE OD		TUBE GAUGE	CUTTER WHEEL	WHEEL HOLDER	WHEEL PIN	PILOT	SUPPORT PILOT	THRUST COLLAR	COLAR DEPTH STOP	
[INCH]	[MM]	[BWG]							LONG	SHORT
1 1/2	38.1	12	CW-13	2CWH-15	CP-3	2P-29	SP-29	TC-300	TCDS-L	TCDS-S
		13				2P-291	SP-291			
		14				2P-30	SP-30			
		15				2P-301	SP-301			
		16				2P-31	SP-31			
		17				2P-311	SP-311			
		18				2P-32	SP-32			
		19				2P-321	SP-321			
		20				2P-33	SP-33			
		21				2P-331	SP-331			
		22				2P-332	SP-332			
		23				2P-333	SP-333			
1 3/4	44.45	24	CW-16	2CWH-18	CP-4	2P-334	SP-334	TC-250	TCDS-L	TCDS-S
		12				2P-35	SP-35			
		13				2P-351	SP-351			
		14				2P-36	SP-36			
		15				2P-361	SP-361			
		16				2P-37	SP-37			
		17				2P-371	SP-371			
		18				2P-38	SP-38			
		19				2P-381	SP-381			
		20				2P-382	SP-382			
		21				2P-383	SP-383			
		22				2P-384	SP-384			
		23				2P-385	SP-385			
		24				2P-386	SP-386			

TUBE OD		TUBE GAUGE	CUTTER WHEEL	WHEEL HOLDER	WHEEL PIN	PILOT	SUPPORT PILOT	THRUST COLLAR	COLAR DEPTH STOP	
[INCH]	[MM]	[BWG]							LONG	SHORT
2	50.80	8	CW-17	2CWH-20	CP-4	2P-40	SP-40	TC-200	TCDS-L	TCDS-S
		9				2P-401	SP-401			
		10				2P-41	SP-41			
		11				2P-411	SP-411			
		12				2P-42	SP-42			
		13				2P-421	SP-421			
		14				2P-43	SP-43			
		15				2P-431	SP-431			
		16				2P-44	SP-44			
		17				2P-441	SP-441			
		18				2P-45	SP-45			
		19				2P-451	SP-451			
		20				2P-46	SP-46			
		21				2P-461	SP-461			
		22				2P-47	SP-47			
		23				2P-471	SP-471			
		24				2P-48	SP-48			

3WTTC-2000 THREE WHEELS TYPE TUBE CUTTER

The 3WTTC-2000 greatly reduces cutting time by utilizing the special 3 point self-centering cutter wheel design and works with 2", thru 4" O.D. tubes. The tool does not create any chips during the cutting process!

Depending on operator experience and tube material the KRAIS 3WTTC-2000 can cut 2" GA 12 in between 6 to 12 seconds. Real tube to tube cycle time is approximately 30 seconds, giving unmatched productivity.




CUTTING RANGE		REACH		POWER		FREE SPEED		TORQUE	
2" - 4"		4"		1,3 Hp		100 Rpm		105 Ft.Lbs	
50,8 - 101,6 mm		101,6 mm		0,97 kW				140 Nm	
AIR USE			WIDTH		HEIGHT			WEIGHT	
55 cfm		1,3 m³/min		2,32"		59 mm		13,1"	
335 mm			23 Lbs		10,42 kg				

OPTIONAL FEED SYSTEMS

Lever feed handle



Crank arm single feed stroke



Tube cutting and tube trimming setup-set-up



On demand we offer 3WTTC with reach up to 5 m.

ALL-PURPOSE TOOL

TUBE OD		TUBE GAUGE	CUTTER WHEEL	WHEEL HOLDER	WHEEL PIN	PILOT EXTENSION	PILOT	THRUST COLLAR	COLAR DEPTH STOP	
[INCH]	[MM]	[BWG]							LONG	SHORT
2	50.8	10	CW-16	CCWH-20	CP-4	PE-WTTC	P42	TC-200	TCDS-L	TCDS-S
		11					P43			
		12					P44			
		13					P45			
		14					P46			
		15					P461			
		16					P47			
		17					P471			
		18					P48			
		19					P481			
		20					P49			
2 1/2	63.50	9	CW-17	CCWH-25	CP-4	PE-WTTC	P51	TC-200	TCDS-L	TCDS-S
		10					P52			
		11					P53			
		12					P54			
		13					P55			
		14					P56			
		15					P561			
		16					P57			
		17					P571			
		18					P58			
		19					P581			
		20					P59			

TUBE OD		TUBE GAUGE	CUTTER WHEEL	WHEEL HOLDER	WHEEL PIN	PILOT EXTENSION	PILOT	THRUST COLLAR	COLAR DEPTH STOP	
[INCH]	[MM]	[BWG]							LONG	SHORT
3	76.20	9	CW-17	CCWH-30	CP-4	PE-WTTC	P61	TC-200	TCDS-L	TCDS-S
		10					P62			
		11					P63			
		12					P64			
		13					P65			
		14					P66			
		15					P661			
		16					P67			
		17					P671			
		18					P68			
		19					P681			
3 1/2	88.90	20					P69			
		9	CW-17	CCWH-35	CP-4	PE-WTTC	P71	TC-400	TCDS-L	TCDS-S
		10					P72			
		11					P73			
		12					P74			
		13					P75			
		14					P76			
		15					P761			
		16					P77			
		17					P771			
		18					P78			
		19					P781			
4	101.60	20					P79			
		9	CW-17	CCWH-40	CP-4	PE-WTTC	P81	TC-400	TCDS-L	TCDS-S
		10					P82			
		11					P83			
		12					P84			
		13					P85			
		14					P86			
		15					P861			
		16					P87			
		17					P871			
		18					P88			
		19					P881			
		20					P89			

3WTTC-3000 THREE WHEELS TUBE CUTTER

The 3WTTC-3000 greatly reduces cutting time by utilizing the special 3 point self-centering cutter wheel design and works with 2-1/2", thru 5" O.D. tubes. The tool does not create any chips during the cutting process! "Real life" tube to tube cycle time is approximately 30 seconds, giving unmatched productivity.




CUTTING RANGE		REACH		POWER	FREE SPEED	TORQUE	
2,5" - 5"		4"		1,3 Hp	55 Rpm	207 Ft.Lbs	
63,5 - 127,0 mm		101,6 mm		0,97 kW		280 Nm	
AIR USE		WIDTH		HEIGHT		WEIGHT	
55 cfm	1,3 m³/min	2,32"	59 mm	19"	485 mm	36,3 Lbs	16,5 kg

OPTIONAL FEED SYSTEMS

Lever feed handle



Crank arm with double feed stroke

ALL-PURPOSE TOOL

Tube cutting and tube trimming setup-set-up

TUBE OD		TUBE GAUGE	CUTTER WHEEL	WHEEL HOLDER	WHEEL PIN	PILOT EXTENSION	PILOT	THRUST COLLAR	COLLAR DEPTH	
[INCH]	[MM]	[BWG]							LONG	SHORT
2 1/2	63.50	8	CW-19	CCWH-55	CP-4	PE-WTTC-3	P350	TC-3200	TCDS-L	TCDS-S
		9					P351			
		10					P352			
		11					P353			
		12					P354			
		13					P355			
		14					P356			
		15					P561			
		16					P357			
		17					P3571			
		18					P358			
		19					P3581			
		20					P359			
3	76.20	6	CW-22	CCWH-60	CP-5	PE-WTTC-3	P3606	TC-3200	TCDS-L	TCDS-S
		7					P3607			
		8					P360			
		9					P361			
		10					P362			
		11					P363			
		12					P364			
		13	CW-22	CCWH-60	CP-5	PE-WTTC-3	P365	TC-3200	TCDS-L	TCDS-S
		14					P366			
		15					P3661			
		16					P367			
		17					P3671			
		18					P368			
		19					P3681			
		20					P369			

TUBE OD		TUBE GAUGE	CUTTER WHEEL	WHEEL HOLDER	WHEEL PIN	PILOT EXTENSION	PILOT	THRUST COLLAR	COLAR DEPTH	
[INCH]	[MM]	[BWG]							LONG	SHORT
3 1/2	88.90	6	CW-22	CCWH-65	CP-5	PE-WTTC-3	P3716	TC-3400	TCDS-L	TCDS-S
		7					P3717			
		8					P370			
		9					P371			
		10					P372			
		11					P373			
		12					P374			
		13					P375			
		14					P376			
		15					P3761			
		16					P377			
		17					P3771			
		18					P378			
		19					P3781			
		20					P379			
4	101.60	6	CW-22	CCWH-70	CP-5	PE-WTTC-3	P3806	TC-3400	TCDS-L	TCDS-S
		7					P3807			
		8					P380			
		9					P381			
		10					P382			
		11					P383			
		12					P384			
		13					P385			
		14					P386			
		15					P3861			
		16					P387			
		17					P3871			
		18					P388			
		19					P3881			
		20					P389			
5	127	6	CW-22	CCWH-80	CP-5	PE-WTTC-3	P3906	TC-3500	TCDS-L	TCDS-S
		7					P3907			
		8					P390			
		9					P391			
		10					P392			
		11					P393			
		12					P394			
		13					P395			
		14					P396			
		15					P3961			
		16					P397			
		17					P3971			
		18					P398			
		19					P3981			
		20					P399			

MWTTC – MANUAL TUBE CUTTER

Tool designed to cut or partially cut the tubes in the center support sheet of condensers, similar in design to those manufactured by Trane, Carrier and JCI.

The MWTTC has adjustable wheel travel that accurately controls the amount of tube wall the operator can cut. Typically 98% or less is easily set up. The MWTTC comes as standard with 120" reach (3m). On request we can manufacture up to 196" reach (5m).

We recommend our MCP-100 Manual Collet Puller as a companion tool to the MWTTC, this allows quick and trouble free stub and tube extraction.



CUTTING RANGE	REACH	POWER
19-25 mm	3000 mm	Manual
3/4" - 1"	120"	

CUTTING WITHOUT CHIPS

TUBE OD		TUBE GAUGE	TOOL NR	WHEEL HOLDER	WHEEL PIN	CUTTING		
[INCH]	[MM]	[BWG]				CUTTER WHEEL	PILOT	THRUST COLLAR
3/4	19.05	14	MW TTC-750	1CCWH-190	CP-20	CW-21	P-008	MW TC-750
		15				CW-21	P-009	
		16				CW-21	P-010	
		17				CW-21	P-011	
		18				CW-21	P-012	
		19		1CCWH-19-2		CW-21	P-013	
		20				CW-21	P-014	
		21				CW-21	P-015	
		22				CW-21	P-016	
		23				CW-21	P-017	
7/8	22.23	24	MW TTC-875	1CCWH-222	CP-25	CW-31	P-018	MW TC-875
		14				CW-25	P-019	
		15				CW-25	P-020	
		16				CW-25	P-021	
		17				CW-25	P-022	
		18		1CCWH-222-2		CW-25	P-023	
		19				CW-25	P-024	
		20				CW-25	P-025	
		21				CW-25	P-026	
		22				CW-25	P-027	
1	25.40	23	MW TTC-1000	1CCWH-254	CP-25	CW-25	P-028	MW TC-1000
		12				CW-31	P-029-1	
		13				CW-31	P-029-2	
		14				CW-31	P-029	
		15				CW-31	P-030	
		16				CW-31	P-031	
		17		CW-31		P-032		
		18		1CCWH-254-2		CW-31	P-033	
		19				CW-31	P-034	
		20				CW-31	P-035	
		21				CW-31	P-036	
		22				CW-31	P-037	
23	CW-31	P-038						
24	CW-31	P-039						

TUBE WALL REDUCING TOOL


It is a special reamer made out of high speed steel, it has a Morse Taper shank and a centralizing pilot specially grinded according to the tube gauge. This tools are used to reduce the gauge of tube to be removed from the tube sheet. Tubes should be drilled in about 80% of the length of the tube sheet.

This tools are used with KDM Pneumatic drill



TUBE O.D.		TUBE GAUGE	TUBE I.D.		TOOL NO.	MORSE TAPER	TUBE SHEET THICKNESS	
[INCH]	[MM]	[BWG]	[INCH]	[MM]			[INCH]	[MM]
1/2	12,7	16	0,370	9,40	WTRT-1	2	2-7/8"	73
		17	0,384	9,75	WTRT-2	2	2-7/8"	73
		18	0,402	10,21	WTRT-3	2	2-7/8"	73
		19	0,415	10,56	WTRT-4	2	2-7/8"	73
5/8	15,8	12	0,407	10,34	WTRT-5	2	3-3/8"	86
		13	0,435	11,05	WTRT-6	2	3-3/8"	86
		14	0,459	11,66	WTRT-7	2	3-3/8"	86
		15	0,481	12,22	WTRT-8	2	3-3/8"	86
		16	0,495	12,57	WTRT-9	2	3-3/8"	86
		18	0,527	13,39	WTRT-10	2	3-3/8"	86
3/4	19	10	0,482	12,24	WTRT-11	2	4-3/8"	111
		11	0,510	12,95	WTRT-12	2	4-3/8"	111
		12	0,532	13,51	WTRT-13	2	4-3/8"	111
		13	0,560	14,22	WTRT-14	2	4-3/8"	111
		14	0,584	14,83	WTRT-15	2	4-3/8"	111
		15	0,606	15,39	WTRT-16	2	4-3/8"	111
		16	0,620	15,75	WTRT-17	2	4-3/8"	111
		18	0,652	16,56	WTRT-18	2	4-3/8"	111
7/8	22,2	10	0,607	15,42	WTRT-19	2	4-5/8"	117
		11	0,635	16,13	WTRT-20	2	4-5/8"	117
		12	0,657	16,69	WTRT-21	2	4-5/8"	117
		13	0,685	17,40	WTRT-22	2	4-5/8"	117
		14	0,709	18,01	WTRT-23	2	4-5/8"	117
		15	0,731	18,57	WTRT-24	2	4-5/8"	117
		16	0,745	18,92	WTRT-25	2	4-5/8"	117
		18	0,777	19,74	WTRT-26	2	4-5/8"	117
1	25,4	8	0,670	17,02	WTRT-27	3	5-1/2"	140
		10	0,732	18,59	WTRT-28	3	5-1/2"	140
		11	0,760	19,30	WTRT-29	3	5-1/2"	140
		12	0,782	19,86	WTRT-30	3	5-1/2"	140
		13	0,810	20,57	WTRT-31	3	5-1/2"	140
		14	0,834	21,18	WTRT-32	3	5-1/2"	140
		15	0,856	21,74	WTRT-33	3	5-1/2"	140
		16	0,870	22,10	WTRT-34	3	5-1/2"	140
		18	0,902	22,91	WTRT-35	3	5-1/2"	140

TUBE O.D.		TUBE GAUGE	TUBE I.D.		TOOL NO.	MORSE TAPER	TUBE SHEET THICKNESS	
[INCH]	[MM]	[BWG]	[INCH]	[MM]			[INCH]	[MM]
1-1/4	31,7	8	0,92	23,37	WTRT-36	3	5-1/2"	140
		10	0,982	24,94	WTRT-37	3	5-1/2"	140
		11	1,010	25,65	WTRT-38	3	5-1/2"	140
		12	1,032	26,21	WTRT-39	3	5-1/2"	140
		13	1,060	26,92	WTRT-40	3	5-1/2"	140
		14	1,084	27,53	WTRT-41	3	5-1/2"	140
		16	1,12	28,45	WTRT-42	3	5-1/2"	140
		18	1,152	29,26	WTRT-43	4	5-1/2"	140
1-1/2	38,1	8	1,170	29,72	WTRT-44	4	5-1/2"	140
		10	1,232	31,29	WTRT-45	4	5-1/2"	140
		11	1,260	32,00	WTRT-46	4	5-1/2"	140
		12	1,282	32,56	WTRT-47	4	5-1/2"	140
		13	1,310	33,27	WTRT-48	4	5-1/2"	140
		14	1,334	33,88	WTRT-49	4	5-1/2"	140
		16	1,370	34,80	WTRT-50	4	5-1/2"	140

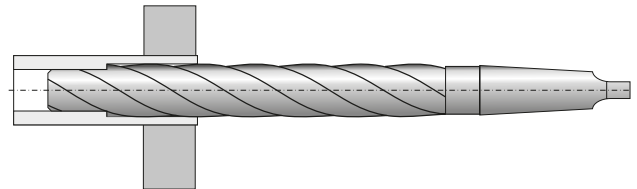


PNEUMATIC CHIPPING HAMMER



TD Tube Drifts and CT Collapsing tools are very good tools for quick removal of tube stubs from the tube sheet. For tube 1/2" to 1" OD tools are made as standard. The tools are equipped with shank 06. Other sizes available on request. The 01 shank and tool with reach longer than 6" available on request. Other sizes, up to 2" available on request.

RAM STROKE		RAM FREQUENCY		RAM DIAMETER	
80 mm		33 Hz		40 mm	
3,149"				1,574"	
AIR USE		LENGTH WITHOUT TOOL		BODY WEIGHT	
### cfm	25 m³/min	16,141"	410 mm	9,48 Lbs	4,3 kg

CT COLLAPSING TOOLS




TUBE O.D.		TUBE GAUGE			TOOL WITH SHANK 06
[INCH]	[MM]	[BWG]	[MM]	[INCH]	
3/8"	10	16 - 20	1,65 - 0,89	0,065 - 0,035	CT-375-06
1/2"	12,7				CT-500-06
5/8"	15,8				CT-625-06
3/4"	19,05				CT-750-06
7/8"	22,2				CT-875-06
1"	25,4				CT-1000-06
1-1/4"	31,7				CT-1125-06
1-1/2"	38,1				CT-1500-06
1-3/4"	44,4				CT-1750-06
2"	50,8				CT-2000-06

TD TUBE DRIFT



TUBE O.D.		TUBE GAUGE			TUBE I.D.		TOOL WITH SHANK 06
[INCH]	[MM]	[BWG]	[INCH]	[MM]	[INCH]	[MM]	
1/2	12,7	12	0,109	2,77	0,281	7,16	TD-500-12-06
		14	0,083	2,11	0,333	8,48	TD-500-14-06
		16	0,065	1,65	0,370	9,40	TD-500-16-06
		18	0,049	1,24	0,402	10,22	TD-500-18-06
		20	0,035	0,89	0,429	10,92	TD-500-20-01
5/8	15,8	12	0,109	2,77	0,407	10,34	TD-625-12-06
		13	0,095	2,41	0,435	11,05	TD-625-13-06
		14	0,083	2,11	0,459	11,66	TD-625-14-06
		15	0,072	1,83	0,481	12,22	TD-625-15-06
		16	0,065	1,65	0,495	12,57	TD-625-16-06
		17	0,058	1,47	0,509	12,93	TD-625-17-06
		18	0,049	1,24	0,527	13,39	TD-625-18-06
		19	0,042	1,07	0,541	13,74	TD-625-19-06
3/4	19	20	0,035	0,89	0,555	14,10	TD-625-20-06
		10	0,134	3,40	0,482	12,24	TD-750-10-06
		12	0,109	2,77	0,532	13,51	TD-750-12-06
		13	0,095	2,41	0,560	14,22	TD-750-13-06
		14	0,083	2,11	0,584	14,83	TD-750-14-06
		15	0,072	1,83	0,606	15,39	TD-750-15-06
		16	0,065	1,65	0,620	15,75	TD-750-16-06
		17	0,058	1,47	0,634	16,10	TD-750-17-06
		18	0,049	1,24	0,652	16,56	TD-750-18-06
		19	0,042	1,07	0,666	16,92	TD-750-19-06
7/8"	22,2	20	0,035	0,89	0,680	17,27	TD-750-20-06
		12	0,109	2,77	0,657	16,69	TD-875-12-06
		14	0,083	2,11	0,709	18,01	TD-875-14-06
		15	0,072	1,83	0,731	18,57	TD-875-15-06
		16	0,065	1,65	0,745	18,92	TD-875-16-06
1	25,4	18	0,049	1,24	0,777	19,74	TD-875-18-06
		8	0,165	4,19	0,670	17,02	TD-1000-8-06
		9	0,148	3,76	0,704	17,88	TD-1000-9-06
		10	0,134	3,40	0,732	18,59	TD-1000-10-06
		11	0,120	3,05	0,760	19,30	TD-1000-11-06
		12	0,109	2,77	0,782	19,86	TD-1000-12-06
		13	0,095	2,41	0,810	20,57	TD-1000-13-06
		14	0,083	2,11	0,834	21,18	TD-1000-14-06
		15	0,072	1,83	0,856	21,74	TD-1000-15-06
		16	0,065	1,65	0,870	22,10	TD-1000-16-06
		17	0,058	1,47	0,884	22,45	TD-1000-17-06
		18	0,049	1,24	0,902	22,91	TD-1000-18-06
		19	0,042	1,07	0,916	23,27	TD-1000-19-06
20	0,035	0,89	0,930	23,62	TD-1000-20-06		

SHANK TYPE 06



MANUAL TUBE PULLER



TUBE OD		TUBE GAUGE	WALL THKS		TUBE ID		TUBE PULLER NO	SPARE SPEARS NO
[INCH]	[MM]	[BWG]	[INCH]	[MM]	[INCH]	[MM]		
1/2	12,7	14	0,08	2,11	0,334	8,48	KSP 500-14	KSP 1/2-14
		16	0,07	1,65	0,370	9,40	KSP500-16	KSP 1/2-16
		18	0,05	1,24	0,402	10,21	KSP 500-18	KSP 1/2-18
		20	0,04	0,89	0,430	10,92	KSP 500-20	KSP 1/2-20
5/8	15,88	14	0,08	2,11	0,459	11,66	KSP 625-14	KSP 5/8-14
		16	0,07	1,65	0,495	12,57	KSP 625-16	KSP 5/8-16
		18	0,05	1,24	0,527	13,39	KSP 625-18	KSP 5/8-18
		20	0,04	0,89	0,555	14,10	KSP 625-20	KSP 5/8-20
3/4	19,05	14	0,08	2,11	0,585	14,86	KSP 750-14	KSP 3/4-14
		16	0,07	1,65	0,620	15,75	KSP 750-16	KSP 3/4-16
		18	0,05	1,24	0,652	16,56	KSP 750-18	KSP 3/4-18
		20	0,04	0,89	0,680	17,27	KSP 750-20	KSP 3/4-20
7/8	22,2	14	0,08	2,11	0,709	18,01	KSP 875-14	KSP 7/8-14
		16	0,07	1,65	0,745	18,92	KSP 875-16	KSP 7/8-16
		18	0,05	1,24	0,777	19,74	KSP 875-18	KSP 7/8-18
		20	0,04	0,89	0,805	20,45	KSP 875-20	KSP 7/8-20
1	25,4	14	0,08	2,11	0,834	21,18	KSP 1000-14	KSP 1-14
		16	0,07	1,65	0,870	22,10	KSP 1000-16	KSP 1-16
		18	0,05	1,24	0,902	22,91	KSP 1000-18	KSP 1-18
		20	0,04	0,89	0,930	23,62	KSP 1000-20	KSP 1-20

MSP-100 MANUAL SPEAR PULLER




Easy and economical way for tube removal.

- » Easy to use by inserting the spear into the tube and removing required just a hand wrench or our universal ratched handle design for this operation (the drive handle it's a separate item and must be ordered separately).
- » No external power required.
- » Durable - all parts made out of high strength steel and are heat treated.
- » Only one tool body required to cover the range from 1/2" to 1". Required only spears and nose pieces.

TUBE OD		TUBE GAUGE	SPEARS	NOSE PIECE
[INCH]	[MM]	[BWG]		
1/2	12,7	14-15	CPS-12-14-15	CPS-10-06A-12
		16-17	CPS-12-16-17	
		18-19	CPS-12-18-19	
		20-22	CPS-12-20-22	
5/8	15,88	22-24	CPS-12-22-24	CPS-10-06A-34
		10-11	CPS-58-10-11	
		12-13	CPS-58-12-13	
		14-15	CPS-58-14-15	
3/4	19,05	16-17	CPS-58-16-17	CPS-10-06A-34
		10-11	CPS-34-10-11	
		12-13	CPS-34-12-13	
		14-15	CPS-34-14-15	
7/8	22,23	16-17	CPS-34-16-17	CPS-10-06A-78
		10-11	CPS-78-10-11	
		12-13	CPS-78-12-13	
		14-15	CPS-78-14-15	
1	25,4	16-17	CPS-78-16-17	CPS-10-06A-1
		10-11	CPS-1-10-11	
		12-13	CPS-1-12-13	
		14-15	CPS-1-14-15	
		16-17	CPS-1-16-17	

2-FUNCTION RATCHED HANDLE

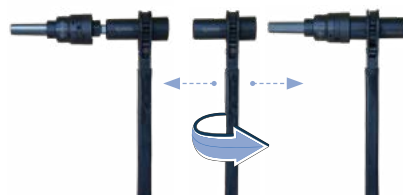

MCP-100 MANUAL COLLET PULLER

MCP-100 manual collet type tube puller for quick and easy tube stub removal from heat exchanges, condensers, chillers and other tubular pressure vessels.

Manually operated develop up to 10 Tons pulling force (depend on the arm length of the ratchet wrench), with 4" stroke. Can be used for tubes form 5/8" (16mm) to 1" (25 mm) O.D.


Recommended for smaller amount of tube to be pulled.



TUBE OD		TUBE GAUGE	GRIPPER SET	DRAW MANDREL	NOSE PIECE	LOCK NUT	ADJUST NUT	JAW O'RING	C O'RING
[INCH]	[MM]	[BWG]							
5/8"	15,88	16-17	CP-1000-01-58-16	CP-10S-03-58	CP-10S-06A-58	CP-10-LN-58	CP-10-AN-58	CP-2220	CP-1724
		18-19	CP-1000-01-58-18	CP-10S-03-58	CP-10S-06A-58	CP-10-LN-58	CP-10-AN-58	CP-2220	CP-1724
		20-21	CP-1000-01-58-20	CP-10S-03-58	CP-10S-06A-58	CP-10-LN-58	CP-10-AN-58	CP-2220	CP-1724
		22-23	CP-1000-01-58-22	CP-10S-03-58	CP-10S-06A-58	CP-10-LN-58	CP-10-AN-58	CP-2220	CP-1724
3/4"	19,05	16-17	CP-1000-01-34-16	CP-10S-03-34	CP-10S-06A-34	CP-10-LN-34	CP-10-AN-34	CP-2220	CP-1724
		18-19	CP-1000-01-34-18	CP-10S-03-34	CP-10S-06A-34	CP-10-LN-34	CP-10-AN-34	CP-2220	CP-1724
		20-21	CP-1000-01-34-20	CP-10S-03-34	CP-10S-06A-34	CP-10-LN-34	CP-10-AN-34	CP-2220	CP-1724
		22-23	CP-1000-01-34-22	CP-10S-03-34	CP-10S-06A-34	CP-10-LN-34	CP-10-AN-34	CP-2220	CP-1724
7/8"	22,23	16-17	CP-1000-01-78-16	CP-10S-03-78	CP-10S-06A-78	CP-10-LN-78	CP-10-AN-78	CP-2220	CP-1724
		18-19	CP-1000-01-78-18	CP-10S-03-78	CP-10S-06A-78	CP-10-LN-78	CP-10-AN-78	CP-2220	CP-1724
		20-21	CP-1000-01-78-20	CP-10S-03-78	CP-10S-06A-78	CP-10-LN-78	CP-10-AN-78	CP-2220	CP-1724
		22-23	CP-1000-01-78-22	CP-10S-03-78	CP-10S-06A-78	CP-10-LN-78	CP-10-AN-78	CP-2220	CP-1724
1"	25,4	16-17	CP-1000-01-1-16	CP-10S-03-1	CP-10S-06A-1	CP-10-LN-1	CP-10-AN-1	CP-2220	CP-1724
		18-19	CP-1000-01-1-18	CP-10S-03-1	CP-10S-06A-1	CP-10-LN-1	CP-10-AN-1	CP-2220	CP-1724
		20-21	CP-1000-01-1-20	CP-10S-03-1	CP-10S-06A-1	CP-10-LN-1	CP-10-AN-1	CP-2220	CP-1724
		22-23	CP-1000-01-1-22	CP-10S-03-1	CP-10S-06A-1	CP-10-LN-1	CP-10-AN-1	CP-2220	CP-1724

TUBE PULLER CP-1000-S

Shortened version of our model CP-1000. This unit has been designed to remove both ferrous and non-ferrous tubing from condensers, chillers and heat exchangers. Capacity from 5/8" to 1-1/2" O.D. gage 16 to 24 (16 to 38 mm O.D. wall 0,5 to 1,6 mm) from tube sheet up to 2" (50 mm)

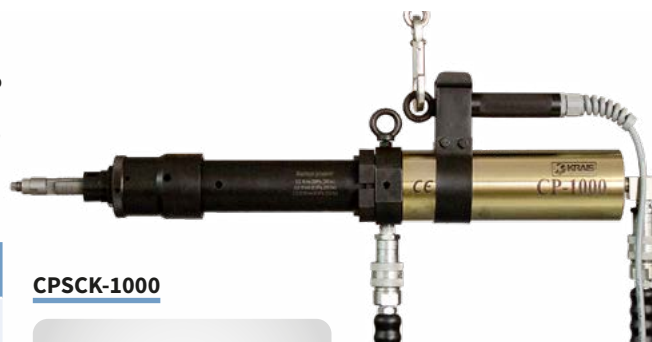

CPSCK-1000




For this tool we offer a spears type conversion kit.

PULLING FORCE		PULLING STROKE		PULLING SPEED	
150 kN		160 mm		17 mm/sec	
15 T		6"		0,7"/sec.	
BODY DIMENSIONS			BODY WEIGHT		
3,38" x 26,77"		86 x 680 mm		30 Lbs 13,5 kg	

TUBE OD		TUBE GAUGE	MIN ENTER DIM AFTER EXP.		MAX ENTER DIM AFTER EXP.		GRIPPER SET	DRAW MANDREL	NOSE PIECE	LOCK NUT	ADJUST NUT	JAW O'RING	C O'RING
[INCH]	[MM]		[INCH]	[MM]	[INCH]	[MM]							
5/8	15,88	16-17	0,506	12,85	0,545	13,84	CP-1000-01-58-16	CP-10S-03-58	CP-10S-06A-58	CP-10-LN-58	CP-10-AN-58	CP-2220	CP-1724
		18-19	0,535	13,59	0,574	14,58	CP-1000-01-58-18						
		20-21	0,562	14,27	0,602	15,29	CP-1000-01-58-20						
		22-23	0,576	14,63	0,616	15,65	CP-1000-01-58-22						
3/4	19,05	16-17	0,631	16,03	0,671	17,04	CP-1000-01-34-16	CP-10S-03-34	CP-10S-06A-34	CP-10-LN-34	CP-10-AN-34	CP-2220	CP-1724
		18-19	0,665	16,89	0,704	17,88	CP-1000-01-34-18						
		20-21	0,692	17,58	0,732	18,59	CP-1000-01-34-20						
		22-23	0,706	17,93	0,746	18,95	CP-1000-01-34-22						
7/8	22,23	16-17	0,755	19,18	0,795	20,19	CP-1000-01-78-16	CP-10S-03-78	CP-10S-06A-78	CP-10-LN-78	CP-10-AN-78	CP-2220	CP-1724
		18-19	0,787	19,99	0,826	20,98	CP-1000-01-78-18						
		20-21	0,815	20,70	0,854	21,69	CP-1000-01-78-20						
		22-23	0,828	21,03	0,868	22,05	CP-1000-01-78-22						
1	25,4	16-17	0,881	22,38	0,921	23,39	CP-1000-01-1-16	CP-10S-03-1	CP-10S-06A-1	CP-10-LN-1	CP-10-AN-1	CP-2220	CP-1724
		18-19	0,913	23,19	0,952	24,18	CP-1000-01-1-18						
		20-21	0,941	23,90	0,980	24,89	CP-1000-01-1-20						
		22-23	0,972	24,69	1,011	25,68	CP-1000-01-1-22						
1-1/4	31,75	16-17	1,133	28,78	1,173	29,79	CP-1000-01-114-16	CP-10S-03-114	CP-10S-06A-114	CP-10-LN-114	CP-10-AN-114	CP-2220	CP-1724
		18-19	1,165	29,59	1,204	30,58	CP-1000-01-114-18						
		20-21	1,194	30,33	1,234	31,34	CP-1000-01-114-20						
		22-23	1,208	30,68	1,248	31,70	CP-1000-01-114-22						
1-1/2	38,10	16-17	1,385	35,18	1,425	36,20	CP-1000-01-112-16	CP-10S-03-112	CP-10S-06A-112	CP-10-LN-112	CP-10-AN-112	CP-2220	CP-1724
		18-19	1,417	35,99	1,456	36,98	CP-1000-01-112-18						
		20-21	1,444	36,68	1,484	37,69	CP-1000-01-112-20						
		22-23	1,458	37,03	1,498	38,05	CP-1000-01-112-22						

TUBE PULLER CP-1000-CC

This is our lightweight unit, specifically designed for the condenser and chiller markets. An ideal tool for working within the water box of a surface condenser or within the channel head of a chiller, you can remove 4-6 tubes a minute quickly and effortlessly. Capacity from 5/8" to 1" OD, gage 16 to 24 (16 to 25 mm OD, wall 0,5 to 1,6 mm) from tube sheet up to 2" (50 mm).

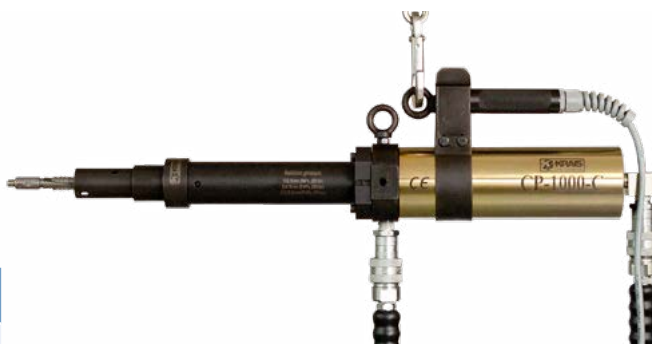

PULLING FORCE	PULLING STROKE	PULLING SPEED
150 kN	160 mm	17 mm/sec
15 T	6"	0,7"/sec.
BODY DIMENSIONS		BODY WEIGHT
3,38" x 26,77"	86 x 680 mm	26,4 Lbs 12 kg

TUBE OD		TUBE GAUGE	MIN ENTER DIM AFTER EXP.		MAX ENTER DIM AFTER EXP.		GRIPPER SET	DRAW MANDREL	NOSE PIECE	LOCK NUT	ADJUST NUT	JAW O'RING	C O'RING
[INCH]	[MM]		[INCH]	[MM]	[INCH]	[MM]							
5/8	15,88	16-17	0,506	12,85	0,545	13,84	CP-1000-01-58-16	CP-10S-03-58	CP-10L-06A-58	CP-10-LN-58	CP-10-AN-58	CP-2220	CP-1724
		18-19	0,535	13,59	0,574	14,58	CP-1000-01-58-18						
		20-21	0,562	14,27	0,602	15,29	CP-1000-01-58-20						
		22-23	0,576	14,63	0,616	15,65	CP-1000-01-58-22						
3/4	19,05	16-17	0,631	16,03	0,671	17,04	CP-1000-01-34-16	CP-10S-03-34	CP-10L-06A-34	CP-10-LN-34	CP-10-AN-34	CP-2220	CP-1724
		18-19	0,665	16,89	0,704	17,88	CP-1000-01-34-18						
		20-21	0,692	17,58	0,732	18,59	CP-1000-01-34-20						
		22-23	0,706	17,93	0,746	18,95	CP-1000-01-34-22						
7/8	22,23	16-17	0,755	19,18	0,795	20,19	CP-1000-01-78-16	CP-10S-03-78	CP-10L-06A-78	CP-10-LN-78	CP-10-AN-78	CP-2220	CP-1724
		18-19	0,787	19,99	0,826	20,98	CP-1000-01-78-18						
		20-21	0,815	20,70	0,854	21,69	CP-1000-01-78-20						
		22-23	0,828	21,03	0,868	22,05	CP-1000-01-78-22						
1	25,4	16-17	0,881	22,38	0,921	23,39	CP-1000-01-1-16	CP-10S-03-1	CP-10L-06A-1	CP-10-LN-1	CP-10-AN-1	CP-2220	CP-1724
		18-19	0,913	23,19	0,952	24,18	CP-1000-01-1-18						
		20-21	0,941	23,90	0,980	24,89	CP-1000-01-1-20						
		22-23	0,972	24,69	1,011	25,68	CP-1000-01-1-22						

Non standard sizes on request

TUBE PULLER CPS-1000

Our short spear type puller has been designed to pull ferrous, non-ferrous and alloy tubing & stubs from heat exchangers, chillers, condensers and similar thermal exchange equipment. Capacity from 1/2" to 1" O.D. of any gauge up to the units 15 Ton Capacity. (12 to 25 mm O.D. any wall thickness up to the units 15T Capacity) from tube sheet up to 2,25" (57 mm)

Utilizing economical short spear technology, our patented extraction system, automatically grips and releases the spear at the end of its cycle.

This system is simple and cost efficient to own & operate, due to the small amount of consumable required to extract a tube when compared to other pulling technologies.



PULLING FORCE	PULLING STROKE	PULLING SPEED
150 kN	160 mm	17 mm/sec
15 T	6"	0,7"/sec.
BODY DIMENSIONS		BODY WEIGHT
3,38" x 26,77"	86 x 680 mm	26,4 Lbs 12 kg

TUBE OD		TUBE GAUGE	SPEARS	NOSE PIECE
[INCH]	[MM]			
5/8	15,88	10-11	CPS-58-10-11	CPS-10-06A-34
		12-13	CPS-58-12-13	
		14-15	CPS-58-14-15	
		16-17	CPS-58-16-17	
3/4	19,05	10-11	CPS-34-10-11	CPS-10-06A-34
		12-13	CPS-34-12-13	
		14-15	CPS-34-14-15	
		16-17	CPS-34-16-17	
7/8	22,23	10-11	CPS-78-10-11	CPS-10-06A-78
		12-13	CPS-78-12-13	
		14-15	CPS-78-14-15	
		16-17	CPS-78-16-17	
1	25,4	10-11	CPS-1-10-11	CPS-10-06A-1
		12-13	CPS-1-12-13	
		14-15	CPS-1-14-15	
		16-17	CPS-1-16-17	

TUBE PULLER CP-1000-FF

This unit has all the features of our Standard Model CP-1000 with the additional advantage of being able to remove stubs from the waterbox of Fin Fan Coolers as well as tubes/stubs close to the shell or pass partition plates within thermal exchange units. A standard waterbox depth of X is furnished with custom depths available upon request. Capacity from 5/8" to 1-1/2" O.D. gage 16 to 38 (16 to 38 mm O.D. wall 0,5 to 1,6 mm) from tube sheet up to 2" (50 mm)



PULLING FORCE	PULLING STROKE	PULLING SPEED
150 kN	160 mm	17 mm/sec
15 T	6"	0,7"/sec.
BODY DIMENSIONS		BODY WEIGHT
3,38" x 36,61"	86 x 930 mm	32 Lbs 14,5 kg

TUBE OD		TUBE GAUGE	MIN ENTER DIM AFTER EXP.		MAX ENTER DIM AFTER EXP.		GRIPPER SET	DRAW MANDREL	NOSE PIECE	LOCK NUT	ADJUST NUT	JAW O'RING	C O'RING	JAWS HOLDER	MANDREL EXT.
[INCH]	[MM]		[INCH]	[MM]	[INCH]	[MM]									
5/8	15,88	16-17	0,506	12,85	0,545	13,84	CP-1000-01-58-16	CP-10L-03-58	CP-10S-06A-58	CP-10-LN-58	CP-10-AN-58	CP-2220	CP-1724	CP-JH-58-10"	CP-10-DM-EXT
		18-19	0,535	13,59	0,574	14,58	CP-1000-01-58-18								
		20-21	0,562	14,27	0,602	15,29	CP-1000-01-58-20								
		22-23	0,576	14,63	0,616	15,65	CP-1000-01-58-22								
3/4	19,05	16-17	0,631	16,03	0,671	17,04	CP-1000-01-34-16	CP-10L-03-34	CP-10S-06A-34	CP-10-LN-34	CP-10-AN-34	CP-2220	CP-1724	CP-JH-34-10"	CP-10-DM-EXT
		18-19	0,665	16,89	0,704	17,88	CP-1000-01-34-18								
		20-21	0,692	17,58	0,732	18,59	CP-1000-01-34-20								
		22-23	0,706	17,93	0,746	18,95	CP-1000-01-34-22								
7/8	22,23	16-17	0,755	19,18	0,795	20,19	CP-1000-01-78-16	CP-10L-03-78	CP-10S-06A-78	CP-10-LN-78	CP-10-AN-78	CP-2220	CP-1724	CP-JH-78-10"	CP-10-DM-EXT
		18-19	0,787	19,99	0,826	20,98	CP-1000-01-78-18								
		20-21	0,815	20,70	0,854	21,69	CP-1000-01-78-20								
		22-23	0,828	21,03	0,868	22,05	CP-1000-01-78-22								
1	25,4	16-17	0,881	22,38	0,921	23,39	CP-1000-01-1-16	CP-10L-03-1	CP-10S-06A-1	CP-10-LN-1	CP-10-AN-1	CP-2220	CP-1724	CP-JH-1-10"	CP-10-DM-EXT
		18-19	0,913	23,19	0,952	24,18	CP-1000-01-1-18								
		20-21	0,941	23,90	0,980	24,89	CP-1000-01-1-20								
		22-23	0,972	24,69	1,011	25,68	CP-1000-01-1-22								
1-1/4	31,75	16-17	1,133	28,78	1,173	29,79	CP-1000-01-114-16	CP-10L-03-114	CP-10S-06A-114	CP-10-LN-114	CP-10-AN-114	CP-2220	CP-1724	CP-JH-58-114"	CP-10-DM-EXT
		18-19	1,165	29,59	1,204	30,58	CP-1000-01-114-18								
		20-21	1,194	30,33	1,234	31,34	CP-1000-01-114-20								
		22-23	1,208	30,68	1,248	31,70	CP-1000-01-114-22								
1-1/2	38,10	16-17	1,385	35,18	1,425	36,20	CP-1000-01-112-16	CP-10L-03-112	CP-10S-06A-112	CP-10-LN-112	CP-10-AN-112	CP-2220	CP-1724	CP-JH-58-114"	CP-10-DM-EXT
		18-19	1,417	35,99	1,456	36,98	CP-1000-01-112-18								
		20-21	1,444	36,68	1,484	37,69	CP-1000-01-112-20								
		22-23	1,458	37,03	1,498	38,05	CP-1000-01-112-22								

We can supply the FF conversion kit to your specifications on all models of the CP-1000 and CP-1000-S.

TUBE PULLER HPR20-CP1500

Unit designed to pull stubs in the refinery industry. An ideal tool to pull heavy wall tubes and stubs from the heat exchangers. Unique machine design is based on the idea of replacing the traditional, slow and cumbersome method, with spear type puller. HPR20-CP1500 delivers capacity from 5/8" to 1-1/4" gauge 10 to 16, with max pulling force up to 30 ton from the tube sheet up to 2,5" (63 mm) HPR20-CP1500 is easy and fast in operation with lower operating costs.



PULLING FORCE	PULLING STROKE	PULLING SPEED
300 kN	160 mm	34 mm/sec
30 T	6"	1,33"/sec.
BODY DIMENSIONS		BODY WEIGHT
4,7" x 31,5"	120 x 800 mm	85 Lbs 39 kg



UNIQUE DESIGN
Unique gripper design is close to spear type pulling capacity in its tube gauge.



SPINAIR COMPATIBILITY
Tube puller may co operate with SpinAir-2H with spherical rolls .



CPPZ-4W PUMPS
KRAIS 4 way hydraulic pumps have been specifically designed to operate this tube puller.

Tube OD		Tube gauge	Gripper Set	Draw Mandrel	Nose Piece	Jaw o'ring	NS Joint	Adapter	Max Force	Pump (700 Bar)
[inch]	[mm]	[BWG]								
5/8"	15,8	14	CP-1500-01-58-14	CP-15-02-58	CP-15-03-58	CP-15-058	CP-15-06-58	CP-15-07-34	15 ton	CPPZ-4W
		15	CP-1500-01-58-15	CP-15-02-58	CP-15-03-58	CP-15-058	CP-15-06-58	CP-15-07-34	15 ton	CPPZ-4W
		16	CP-1500-01-58-16	CP-15-02-58	CP-15-03-58	CP-15-058	CP-15-06-58	CP-15-07-34	15 ton	CPPZ-4W
		17	CP-1500-01-58-17	CP-15-02-58	CP-15-03-58	CP-15-058	CP-15-06-58	CP-15-07-34	15 ton	CPPZ-4W
		18	CP-1500-01-58-18	CP-15-02-58	CP-15-03-58	CP-15-058	CP-15-06-58	CP-15-07-34	15 ton	CPPZ-4W
		19	CP-1500-01-58-19	CP-15-02-58	CP-15-03-58	CP-15-058	CP-15-06-58	CP-15-07-34	15 ton	CPPZ-4W
		20	CP-1500-01-58-20	CP-15-02-58	CP-15-03-58	CP-15-058	CP-15-06-58	CP-15-07-34	15 ton	CPPZ-4W
		21	CP-1500-01-58-21	CP-15-02-58	CP-15-03-58	CP-15-058	CP-15-06-58	CP-15-07-34	15 ton	CPPZ-4W
		22	CP-1500-01-58-22	CP-15-02-58	CP-15-03-58	CP-15-058	CP-15-06-58	CP-15-07-34	15 ton	CPPZ-4W
		12	CP-1500-01-34-12	CP-15-02-34	CP-15-03-34	CP-15-034	CP-15-06-34	CP-15-07-34	20 ton	CPPZ-4W
3/4"	19,05	13	CP-1500-01-34-13	CP-15-02-34	CP-15-03-34	CP-15-034	CP-15-06-34	CP-15-07-34	20 ton	CPPZ-4W
		14	CP-1500-01-34-14	CP-15-02-34	CP-15-03-34	CP-15-034	CP-15-06-34	CP-15-07-34	20 ton	CPPZ-4W
		15	CP-1500-01-34-15	CP-15-02-34	CP-15-03-34	CP-15-034	CP-15-06-34	CP-15-07-34	20 ton	CPPZ-4W
		16	CP-1500-01-34-16	CP-15-02-34	CP-15-03-34	CP-15-034	CP-15-06-34	CP-15-07-34	20 ton	CPPZ-4W
		17	CP-1500-01-34-17	CP-15-02-34	CP-15-03-34	CP-15-034	CP-15-06-34	CP-15-07-34	20 ton	CPPZ-4W
		18	CP-1500-01-34-18	CP-15-02-34	CP-15-03-34	CP-15-034	CP-15-06-34	CP-15-07-34	20 ton	CPPZ-4W
		19	CP-1500-01-34-19	CP-15-02-34	CP-15-03-34	CP-15-034	CP-15-06-34	CP-15-07-34	20 ton	CPPZ-4W
		20	CP-1500-01-34-20	CP-15-02-34	CP-15-03-34	CP-15-034	CP-15-06-34	CP-15-07-34	20 ton	CPPZ-4W
		21	CP-1500-01-34-21	CP-15-02-34	CP-15-03-34	CP-15-034	CP-15-06-34	CP-15-07-34	20 ton	CPPZ-4W
		22	CP-1500-01-34-22	CP-15-02-34	CP-15-03-34	CP-15-034	CP-15-06-34	CP-15-07-34	20 ton	CPPZ-4W
7/8"	22,2	12	CP-1500-01-78-12	CP-15-02-78	CP-15-03-78	CP-15-034	CP-15-06-34	CP-15-07-34	20 ton	CPPZ-4W
		13	CP-1500-01-78-13	CP-15-02-78	CP-15-03-78	CP-15-034	CP-15-06-34	CP-15-07-34	20 ton	CPPZ-4W
		14	CP-1500-01-78-14	CP-15-02-78	CP-15-03-78	CP-15-034	CP-15-06-34	CP-15-07-34	20 ton	CPPZ-4W
		15	CP-1500-01-78-15	CP-15-02-78	CP-15-03-78	CP-15-034	CP-15-06-34	CP-15-07-34	20 ton	CPPZ-4W
		16	CP-1500-01-78-16	CP-15-02-78	CP-15-03-78	CP-15-034	CP-15-06-34	CP-15-07-34	20 ton	CPPZ-4W
		17	CP-1500-01-78-17	CP-15-02-78	CP-15-03-78	CP-15-034	CP-15-06-34	CP-15-07-34	20 ton	CPPZ-4W
		18	CP-1500-01-78-18	CP-15-02-78	CP-15-03-78	CP-15-034	CP-15-06-34	CP-15-07-34	20 ton	CPPZ-4W

Tube OD		Tube gauge	Gripper Set	Draw Mandrel	Nose Piece	Jaw o'ring	NS Joint	Adapter	Max Force	Pump
[inch]	[mm]	[BWG]								(700 Bar)
1"	25,4	8	CP-1500-01-1-8	CP-15-02-1	CP-15-03-1	CP-15-034	CP-15-06-34	CP-15-07-34	30 ton	CPPZ-4W
		8	CP-1500-01-1-9	CP-15-02-1	CP-15-03-1	CP-15-034	CP-15-06-34	CP-15-07-34	30 ton	CPPZ-4W
		10	CP-1500-01-1-10	CP-15-02-1	CP-15-03-1	CP-15-034	CP-15-06-34	CP-15-07-34	30 ton	CPPZ-4W
		11	CP-1500-01-1-11	CP-15-02-1	CP-15-03-1	CP-15-034	CP-15-06-34	CP-15-07-34	30 ton	CPPZ-4W
		12	CP-1500-01-1-12	CP-15-02-1	CP-15-03-1	CP-15-034	CP-15-06-34	CP-15-07-34	30 ton	CPPZ-4W
		13	CP-1500-01-1-13	CP-15-02-1	CP-15-03-1	CP-15-034	CP-15-06-34	CP-15-07-34	30 ton	CPPZ-4W
		14	CP-1500-01-1-14	CP-15-02-1	CP-15-03-1	CP-15-034	CP-15-06-34	CP-15-07-34	30 ton	CPPZ-4W
		15	CP-1500-01-1-15	CP-15-02-1	CP-15-03-1	CP-15-034	CP-15-06-34	CP-15-07-34	30 ton	CPPZ-4W
		16	CP-1500-01-1-16	CP-15-02-1	CP-15-03-1	CP-15-034	CP-15-06-34	CP-15-07-34	30 ton	CPPZ-4W
		17	CP-1500-01-1-17	CP-15-02-1	CP-15-03-1	CP-15-034	CP-15-06-34	CP-15-07-34	30 ton	CPPZ-4W
		18	CP-1500-01-1-18	CP-15-02-1	CP-15-03-1	CP-15-034	CP-15-06-34	CP-15-07-34	30 ton	CPPZ-4W
1-1/8"	28,5	8	CP-1500-01-118-8	CP-15-02-118	CP-15-03-118	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		9	CP-1500-01-118-9	CP-15-02-118	CP-15-03-118	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		10	CP-1500-01-118-10	CP-15-02-118	CP-15-03-118	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		11	CP-1500-01-118-11	CP-15-02-118	CP-15-03-118	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		12	CP-1500-01-118-12	CP-15-02-118	CP-15-03-118	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		13	CP-1500-01-118-13	CP-15-02-118	CP-15-03-118	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		14	CP-1500-01-118-14	CP-15-02-118	CP-15-03-118	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		15	CP-1500-01-118-15	CP-15-02-118	CP-15-03-118	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		16	CP-1500-01-118-16	CP-15-02-118	CP-15-03-118	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		17	CP-1500-01-118-17	CP-15-02-118	CP-15-03-118	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		18	CP-1500-01-118-18	CP-15-02-118	CP-15-03-118	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
1-1/4"	31,7	8	CP-1500-01-317-8	CP-15-02-114	CP-15-03-114	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		9	CP-1500-01-317-9	CP-15-02-114	CP-15-03-114	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		10	CP-1500-01-317-10	CP-15-02-114	CP-15-03-114	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		11	CP-1500-01-317-11	CP-15-02-114	CP-15-03-114	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		12	CP-1500-01-317-12	CP-15-02-114	CP-15-03-114	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		13	CP-1500-01-317-13	CP-15-02-114	CP-15-03-114	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		14	CP-1500-01-317-14	CP-15-02-114	CP-15-03-114	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		14	CP-1500-01-317-15	CP-15-02-114	CP-15-03-114	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		16	CP-1500-01-317-16	CP-15-02-114	CP-15-03-114	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		17	CP-1500-01-317-17	CP-15-02-114	CP-15-03-114	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W
		18	CP-1500-01-317-18	CP-15-02-114	CP-15-03-114	CP-15-114	CP-15-06-114	CP-15-07-114	30 ton	CPPZ-4W

HPR-CP2000 TUBE PULLER

HPR-CP2000 KRAIS gripper-type tube puller is designed for pulling 1-1/4" thru 2-1/2" OD tubes in heat exchangers and fire tube boilers. This gripper type tube puller makes tube pulling faster and easier. See selection charts below for ordering grippers, draw bars and components for the tube sizes being pulled.



PULLING FORCE		PULLING STROKE		PULLING SPEED	
300 kN		160 mm		34 mm/sec	
30 T		6"		1,33"/sec.	
BODY DIMENSIONS			BODY WEIGHT		
4,7" x 31,5"		120 x 800 mm		85 Lbs	
				39 kg	

TUBE OD		TUBE GAUGE	GRIPPER SET	DRAW MANDREL	NOSE PIECE	LOCK NUT	ADJUST NUT	JAW O'RING	JOINT	ADAPTER	JAWS LOCKING RING	SPRING
[INCH]	[MM]											
1-1/4	31,75	12	CP-2000-01-114-12	CP-30-02-114	CP-30-03-114	CP-30-04-114	CP-30-05-114	CP-30-0114	CP-30-06-112	CP-30-07-112	CP-30-08-112	CP-30-09-112
		13	CP-2000-01-114-13									
		14	CP-2000-01-114-14									
		15-16	CP-2000-01-114-15									
		17-18	CP-2000-01-114-17									
1-1/2	38,10	8	CP-2000-01-112-8	CP-30-02-112	CP-30-03-112	CP-30-04-112	CP-30-05-112	CP-30-0112	CP-30-06-112	CP-30-07-112	CP-30-08-112	CP-30-09-112
		9	CP-2000-01-112-9									
		10	CP-2000-01-112-10									
		11	CP-2000-01-112-11									
		12	CP-2000-01-112-12									
		13	CP-2000-01-112-13									
		14	CP-2000-01-112-14									
		15-16	CP-2000-01-112-15									
		17-18	CP-2000-01-112-17									
1-3/4	44,45	19-20	CP-2000-01-112-19	CP-30-02-175	CP-30-03-175	CP-30-04-175	CP-30-05-175	CP-30-0175	CP-30-06-200	CP-30-07-200	CP-30-08-200	CP-30-09-200
		8	CP-2000-01-175-8									
		9	CP-2000-01-175-9									
		10	CP-2000-01-175-10									
		11	CP-2000-01-175-11									
		12	CP-2000-01-175-12									
		13	CP-2000-01-175-13									
		14	CP-2000-01-175-14									
2	50,80	15-16	CP-2000-01-175-15	CP-30-02-200	CP-30-03-200	CP-30-04-200	CP-30-05-200	CP-30-0200	CP-30-06-200	CP-30-07-200	CP-30-08-200	CP-30-09-200
		17-18	CP-2000-01-175-17									
		6	CP-2000-01-200-6									
		7	CP-2000-01-200-7									
		8	CP-2000-01-200-8									
		9	CP-2000-01-200-9									
		10	CP-2000-01-200-10									
		11	CP-2000-01-200-11									
		12	CP-2000-01-200-12									
		13	CP-2000-01-200-13									
		14	CP-2000-01-200-14									
		15-16	CP-2000-01-200-15									
		17-18	CP-2000-01-200-17									

TUBE OD		TUBE GAUGE	GRIPPER SET	DRAW MANDREL	NOSE PIECE	LOCK NUT	ADJUST NUT	JAW O'RING	JOINT	ADAPTER	JAWS LOCKING RING	SPRING
[INCH]	[MM]											
2-1/4	57,15	6	CP-2000-01-225-6	CP-30-02-225	CP-30-03-225	CP-30-04-225	CP-30-05-225	CP-30-0225	CP-30-06-250	CP-30-07-250	CP-30-08-250	CP-30-09-250
		7	CP-2000-01-225-7									
		8	CP-2000-01-225-8									
		9	CP-2000-01-225-9									
		10	CP-2000-01-225-10									
		11	CP-2000-01-225-11									
		12	CP-2000-01-225-12									
		13	CP-2000-01-225-13									
		14	CP-2000-01-225-14									
		15-16	CP-2000-01-225-15									
17-18	CP-2000-01-225-17											
2-1/2	63,50	6	CP-2000-01-250-6	CP-30-02-250	CP-30-03-250	CP-30-04-250	CP-30-05-250	CP-30-0250	CP-30-06-250	CP-30-07-250	CP-30-08-250	CP-30-09-250
		7	CP-2000-01-250-7									
		8	CP-2000-01-250-8									
		9	CP-2000-01-250-9									
		10	CP-2000-01-250-10									
		11	CP-2000-01-250-11									
		12	CP-2000-01-250-12									
		13	CP-2000-01-250-13									
		14	CP-2000-01-250-14									
		15-16	CP-2000-01-250-15									
17-18	CP-2000-01-250-16											

SUPER JENNY SEMI-AUTOMATIC TUBE PULLER

Super Jenny Series of Hydraulic Semi-Automatic Tube Pullers, allows the user to continuously pull tubes through heat exchangers, condensers and boilers, without the use of hammers or winches etc. The key to the system is the OD gripping jaw that will pull the tube as the operator actuates the ram.



30-TON "SUPER-JENNY"

30-ton puller is the workhorse of industry. Available with either a 3" or 6" stroke. This tool is capable of pulling 5/8" – 1-1/4" tubes continuously. It can even pull up to 3" stubs in specific applications.

TUBE OD		TUBE GAUGE	PULLING SPEAR	PULLING JAW	NOSE COLLAR	O-RING	JAW SPRING	SPEAR-MALE
[INCH]	[MM]							
5/8"	15,88	13-16	K-6011	K-3032	K-0625	K-0006	K-0303	1/2"
		18-24	K-6012	K-3032	K-0625	K-0006	K-0303	1/2"
3/4"	19,05	10-12	K-6020	K-3042	K-0750	K-0006	K-0303	5/8"
		13-16	K-6021	K-3042	K-0750	K-0006	K-0303	5/8"
		18-24	K-6022	K-3042	K-0750	K-0006	K-0303	5/8"
7/8"	22,23	10-12	K-6030	K-3047	K-0875	K-0006	K-0303	5/8"
		13-16	K-6031	K-3047	K-0875	K-0006	K-0303	5/8"
		18-24	K-6032	K-3047	K-0875	K-0006	K-0303	5/8"
1"	25,4	10-12	K-6040	K-3052	K-1000	K-0006	K-0303	3/4"
		13-16	K-6041	K-3052	K-1000	K-0006	K-0303	3/4"
		18-24	K-6042	K-3052	K-1000	K-0006	K-0303	3/4"
1-1/4"	31,75	10-12	K-6060	K-3072	K-1250	K-0006	K-0303	1"
		13-16	K-6061	K-3072	K-1250	K-0006	K-0303	1"
		18-24	K-6062	K-3072	K-1250	K-0006	K-0303	1"

10-TON "MINI-JENNY"

Smallest puller, has been specifically designed for chiller and condenser work. Weighing in at just 18 lbs. (6 kg), this 10-ton capacity ram can pull up to 1" OD tubes. With a 3" stroke, this unit is exceptionally quick, and is ideal for tight access applications.

TUBE OD		TUBE GAUGE	PULLING SPEAR	PULLING JAW	NOSE COLLAR	O-RING	JAW SPRING	SPEAR-MALE
[INCH]	[MM]							
5/8"	15,88	13-16	K-6011	K-3031	K-0625M	K-0046	K-0302	1/2"
		18-24	K-6012	K-3031	K-0625M	K-0046	K-0302	1/2"
3/4"	19,05	10-12	K-6020	K-3041	K-0750M	K-0046	K-0302	5/8"
		13-16	K-6021	K-3041	K-0750M	K-0046	K-0302	5/8"
		18-24	K-6022	K-3041	K-0750M	K-0046	K-0302	5/8"
7/8"	22,23	10-12	K-6030	K-3046	K-0875M	K-0046	K-0302	5/8"
		13-16	K-6031	K-3046	K-0875M	K-0046	K-0302	5/8"
		18-24	K-6032	K-3046	K-0875M	K-0046	K-0302	5/8"
1"	25,4	10-12	K-6040	K-3051	K-1000M	K-0046	K-0302	3/4"
		13-16	K-6041	K-3051	K-1000M	K-0046	K-0302	3/4"
		18-24	K-6042	K-3051	K-1000M	K-0046	K-0302	3/4"

60-TON "SUPER-JENNY"

Biggest 60-ton "Super-Jenny" has been designed to pull tubes in the toughest applications. As standard, the unit can pull 1 1/2"-2" tubes. As a special, an adapter is offered which will allow the operator to pull smaller diameter tubes with up to 60 tons of pulling force.

For example, a tube extraction of 1 1/4" x 10 BWG with a 7" tube sheet was noted to pull at 52 tons of pulling force.

TUBE OD		TUBE GAUGE	PULLING SPEAR	PULLING JAW	NOSE COLLAR	O-RING	JAW SPRING	SPEAR-MALE
[INCH]	[MM]							
1-1/2"	38,10	10-12	K-6070	K-3211	K-3212	K-0015	18.2321	1"
		13-16	K-6071	K-3211	K-3212	K-0015	18.2321	1"
		18-24	K-6072	K-3211	K-3212	K-0015	18.2321	1"
1-3/4"	44,45	10-12	K-6080	K-3216	K-3217	K-0015	18.2321	1"
		13-16	K-6081	K-3216	K-3217	K-0015	18.2321	1"
		18-24	K-6082	K-3216	K-3217	K-0015	18.2321	1"
2"	63,50	7-8	K-6090	K-3221	K-3222	K-0015	18.2321	1"
		10-12	K-6091	K-3221	K-3222	K-0015	18.2321	1"
		13-16	K-6092	K-3221	K-3222	K-0015	18.2321	1"

ACTP - AUTOMATIC CONTINUOUS TOOLSET FOR PULLING TUBES



The KRAIS ACTP is an automatic and very fast pump and pulling gun set, is designed for continuous, and stub removal of tubes from boilers, condenser and heat exchangers. Automation provides significant time savings compared to conventional systems. Tubes can be continuously pulled from between 12,5 mm (½") OD and 76 mm (3") OD. A choice of 17, 30 and 45 Ton pulling gun options are available.

The basic version ACTP is a fully hydraulic system - it guarantees safety and eliminates the need for electric wires between the pump and the RAM. ACTP is also available with a choice of electric or pneumatic drive for use in potentially explosive environments.

ADVANTAGES OF KRAIS ACTP

- 】 tubes extraction takes place without damaging the tube sheet,
- 】 hydraulic RAM ensures smooth and stable operation,
- 】 automatic switching from low pressure to high depending on the RAM demand,
- 】 high power translates into a short duration of the extraction cycle,
- 】 the possibility of using different pulling guns with the same pump,
- 】 compact design, short installation time and ease of use.

PNEUMATIC PUMP



ACTP is also available with a choice of electric or pneumatic drive for use in potentially explosive environments.

WORKING RANGES

PULLING GUN	POWER	PULLING STROKE		TUBE OD [MM]		TUBE OD [INCH]		WEIGHT
		[MM]	[INCH]	MIN	MAX	MIN	MAX	
ACPG-17	17 ton	150	6"	12,7	25,4	1/2"	1"	20 kg
ACPG-30	36 ton	150	6"	12,7	38,0	1/2"	1-1/2"	53 kg
ACPG-45	45 ton	100	4"	38,0	76,0	1-1/2"	3"	68 kg

CONSUMABLES FOR ACTP-1000 17 TON

TUBE OD		BWG	PULLING SPEAR	PULLING JAWS	FRONT SPRING	MOUNT JAWS	BACK SPRING
[INCH]	[MM]						
5/8"	15,88	13-16	K-6011	K-3032	K-0302	K-3031	K-0301
		18-24	K-6012				
3/4"	19,05	10-12	K-6020	K-3042	K-0302	K-4041	K-0301
		13-16	K-6021				
7/8"	22,23	18-24	K-6022	K-3047	K-0302	K-3046	K-0301
		10-12	K-6030				
1"	25,4	13-16	K-6031	K-3042	K-0302	K-3046	K-0301
		18-24	K-6032				
1"	25,4	10-12	K-6040	K-3052	K-0302	K-3051	K-0301
		13-16	K-6041				
1"	25,4	18-24	K-6042				
		10-12	K-6040				

CONSUMABLES FOR ACTP-1000 36 TON


TUBE OD		BWG	PULLING SPEAR	PULLING JAWS	FRONT SPRING	MOUNT JAWS	BACK SPRING
[INCH]	[MM]						
5/8"	15,88	13-16	K-6011	K-3030	K-0303	K-3032	K-0303
		18-24	K-6012				
3/4"	19,05	10-12	K-6020	K-3040	K-0303	K-3042	K-0303
		13-16	K-6021				
7/8"	22,23	18-24	K-6022	K-3045	K-0303	K-3047	K-0303
		10-12	K-6030				
1"	25,4	13-16	K-6031	K-3045	K-0303	K-3047	K-0303
		18-24	K-6032				
1"	25,4	10-12	K-6040	K-3050	K-0303	K-3052	K-0303
		13-16	K-6041				
1-1/4"	31,75	18-24	K-6042	K-3070	K-0303	K-3072	K-0303
		10-12	K-6060				
1-1/4"	31,75	13-16	K-6061	K-3070	K-0303	K-3072	K-0303
		18-24	K-6062				

CONSUMABLES FOR ACTP-1000 45 TON

TUBE OD		BWG	PULLING SPEAR	PULLING JAWS	SPRING	MOUNTING JAWS
[INCH]	[MM]					
1-1/2"	38,10	10-12	K-6070	K-3210	K-2321	K-3211
		13-16	K-6071			
		18-24	K-6072			
1-3/4"	44,45	10-12	K-6080	K-3215	K-2321	K-3216
		13-16	K-6081			
		18-24	K-6082			
2"	50,8	7-8	K-6090	K-3220	K-2321	K-3221
		10-12	K-6091			
		13-16	K-6092			
2-1/4"	57,1	10-12	K-7000	K-3230	K-3232	K-3231
		13-16	K-7001			
		18-24	K-7002			
2-1/2"	63,5	10-12	K-7010	K-3240	K-3242	K-3241
		13-16	K-7011			
		18-24	K-7012			

HPR-30 TUBE PULLER

HPR-30 is a Heavy duty, 30 Ton Pulling Ram. This tool has been engineered with a 6" Pull Stoke for tough tube removal applications. It is fitted with flush face, non-drip, couplings and its own custom suspension and handling bracket. In conjunction with our Double Pull Adaptor, this Puller has the captivity to pull the tube 9" from the tube sheet, (see Pulling Spear Selection)

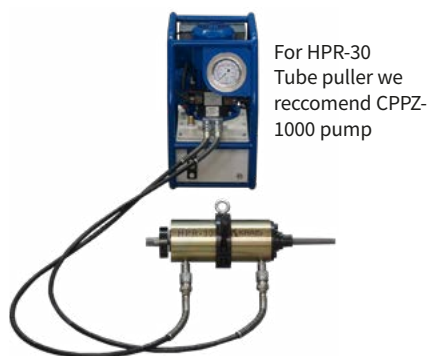

For HPR-30
Tube puller we
reccomend CPPZ-
1000 pump

TUBE SPEARS FOR HPR TUBE PULLER**LENGTH 5,433" (138 MM) WITH 1-1/4 FLAT SIZE (HEX)**

TUBE SIZE			TOOL NO.	SMALL END DIAMETER		LARGE END DIAMETER	
[INCH]	[MM]	GA		[INCH]	[MM]	[INCH]	[MM]
1-1/4"	31,75	7-8	ATS-1250-7-8	0,856	21,7	1,114	28,3
		10-11	ATS-1250-10-11	0,977	24,8	1,206	30,6
		12-13	ATS-1250-12-13	1,027	26,1	1,256	31,9
		14-15	ATS-1250-14-15	1,079	27,4	1,308	33,2
		16-18	ATS-1250-16-18	1,115	28,3	1,344	34,1
1-1/2"	38,10	10-11	ATS-1500-10-11	1,227	31,2	1,456	37,0
		12-13	ATS-1500-12-13	1,227	31,2	1,500	38,1
		14	ATS-1500-14	1,329	33,8	1,500	38,1

LENGTH 8,750" (223 MM) WITH 7/8 FLAT SIZE (HEX)

TUBE SIZE			TOOL NO.	SMALL END DIAMETER		LARGE END DIAMETER	
[INCH]	[MM]	GA		[INCH]	[MM]	[INCH]	[MM]
1/2"	12,70	20	ATS-500-20	0,427	10,8	0,499	12,7
5/8"	15,88	12-13	ATS-625-12-13	0,402	10,2	0,610	15,5
		14-15	ATS-625-14-15	0,454	11,5	0,662	16,8
		16-17	ATS-625-16-17	0,489	12,4	0,625	15,9
		18-19	ATS-625-18-19	0,521	13,2	0,625	15,9
		20	ATS-625-20	0,545	13,8	0,620	15,7
3/4"	19,05	10	ATS-750-10	0,454	11,5	0,662	16,8
		11-13	ATS-750-11-13	0,505	12,8	0,713	18,1
		14-15	ATS-750-14-15	0,597	15,2	0,750	19,1
		16-17	ATS-750-16-17	0,614	15,6	0,750	19,1
		18-19	ATS-750-18-19	0,646	16,4	0,750	19,1
		20	ATS-750-20	0,670	17,0	0,745	18,9
7/8"	22,23	14-15	ATS-875-14-15	0,699	17,8	0,875	22,2
		16-18	ATS-875-16-18	0,740	18,8	0,948	24,1
		20	ATS-875-20	0,800	20,3	0,874	22,2
1"	25,4	9-10	ATS-1 000-9-10	0,699	17,8	0,875	22,2
		11-13	ATS-1000-11-13	0,755	19,2	0,963	24,5
		12-13	ATS-1000-12-13	0,777	19,7	0,985	25,0
		14-15	ATS-1000-14-15	0,829	21,1	1,000	25,4
		16-17	ATS-1000-16-17	0,869	22,1	1,000	25,4
		18-20	ATS-1000-18-20	0,896	22,8	1,000	25,4

Spear sizes of up to 3" on request

ACCESSORIES FOR HPR-30 TUBE PULLERS

D-3055-7 RAM CHAIR



TUBE SIZE	TOOL NO
1-1/4"	D-3055-7
1-1/2"	D-3055-8
1-3/4"	D-3055-9
2"	D-3055-10
2-1/2"	D-3055-11

For tube sizes from 3/8" to 1" the following are required:

- 】 Either Single or Double Pull Adaptor
- 】 Tube Puffing Spear to suit
- 】 Horse Shoe Lock Adaptor
- 】 Load Cap

For tube sizes from 1-1/8" to 2-1/2" the following are required:

- 】 Either Single or Double Pull Adaptor
- 】 Tube Pulling Spear to suit
- 】 Male x Male Adaptor
- 】 Horse Shoe Lock Adaptor
- 】 Ram Chair of Choice

NOTE!

M x F Adaptors are used when additional reach is required in 12" increments. An example of this is when pulling tubes close to shell, and having the puller operating 24" away from the Tube Sheet. In this instance 2 each M x F Adaptors would be used in conjunction with either a single or double pull adaptor. For this example a strong back or extended ram chair would also be required.

D-3055-2 SINGLE PULL ADAPTOR



D-3055-3D DOUBLE ADAPTOR



D-3055-6 MALE X FEMALE ADAPTOR



D-3055-5 MALE X MALE ADAPTOR




D-3055-4 HORSE SHOE LOCK



D-3055-1 LOAD CAP



HPR-30 SETUP FOR STUBS 1 1/4" AND UP

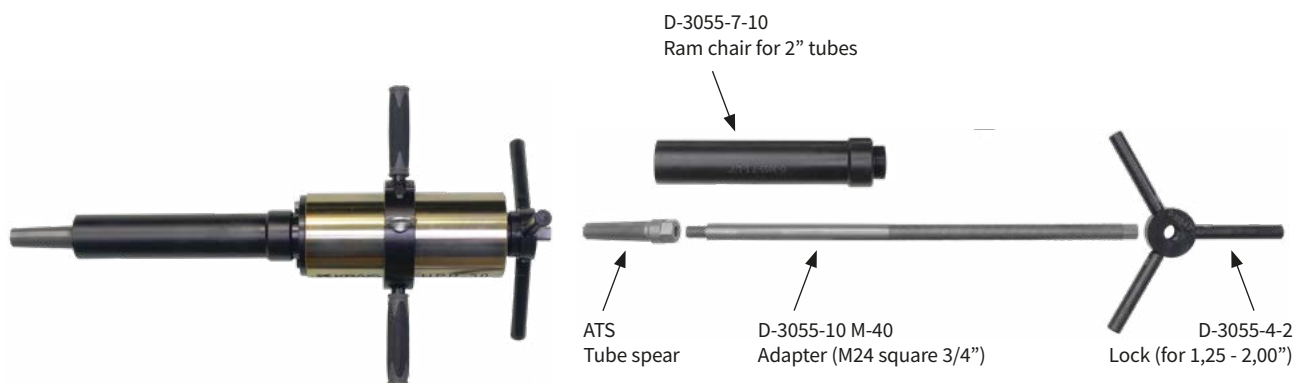

TUBE SPINAIR

Pneumatic tube spinner is designed to remove and flatten non ferrous tubes from 5/8" to 1 1/4" OD. Can also be used to extract ferrous tubes from 5/8" to 1 1/2" OD using special shaped rolls sized to fit each tube.

SPINAIR FEATURES

- ▶ Pulling rolls are made from tool steel and hardened for extended life.
- ▶ High quality, strength construction body is made from aircraft grade aluminium and is anodized for high corrosion resistance.
- ▶ Nose piece and bearing caps are made from stainless steel for corrosion resistance
- ▶ Fully sealed bearings guarantee thousands of hours trouble free operation!



SELECTION GUIDE

	PULLING SPEED	TORQUE		PULLING FORCE	AIR CONSUMPTION		AIR PRESSURE		MAX MOTOR POWER
TUBE SPINAIR-12	12 m/min	1183 Nm	872,25 Ft.Lbs	2,50 Ton	2 x 2300 l/min	2 x 75 cfm	6,2 bar	90 psi	2 x 3,0 Hp
TUBE SPINAIR-20	20 m/min	886 Nm	653,48 Ft.Lbs	1,80 Ton	2 x 2300 l/min	2 x 75 cfm	6,2 bar	90 psi	2 x 3,0 Hp
TUBE SPINAIR-40	40 m/min	960 Nm	708,06 Ft.Lbs	1,95 Ton	2 x 2800 l/min	2 x 95 cfm	6,2 bar	90 psi	2 x 3,5 Hp

TUBE SPINAIR HYDRAULIC



Hydraulic tube spinner SpinAir H is designed to perform the same tasks as the pneumatic version.

SpinAir H specification

Pulling speed: up to 70 m per minute (depends on pump)
 Standard configuration: 1" non ferrous tubes
 Body construction: aircraft grade aluminium, tool steel stainless.
 Weight: 50 kg
 Size: 160 x 220 x 350 mm

Pump Requirements

Min: 40 l/min at 2000 psi (gives approximately 30 m/min);
 Max: 100 l/min at 2250 psi (gives approximately 70 m/min);
 Forward and reverse oil flow.


It is recommended that the pump should be controlled by pedant with a forward and reverse lever attached to the Tube Traveller head. Variable flow control preferred.

SPHERICAL ROLLS



Optional, spherical rolls for tubes bigger than GA16.

TUBE SPINAIR AT WORK



CPPZ-1000

KRAIS Hydraulic Pumps have been designed to exacting standards to provide the maximum productivity from a lightweight pump, specifically designed for tough tube pulling applications.

STANDARD FEATURES

- 】 Two Speed Pump for High Performance
- 】 Light Weight and Portable
- 】 Safe Cage as Standard
- 】 10 ft. Remote Pendant
- 】 2-1/2 Gallon (9,5 liter) Metal Reservoir
- 】 Large Pressure Gauge

**SELECTION GUIDE FOR PUMPS**

MODEL NUMBER	MAX OUTPUT		AMP DRAW FOR MAX OUTPUT	OIL DELIVERY			
	PSI	BAR		100 PSI 6,9 BAR	1015 PSI 70 BAR	5 000 PSI 350 BAR	10 000 PSI 690 BAR
CPPZ-1000 Electric	10000	690	25 Amps 230V & 110V	678 inch ³ /min 11,3 l/min	426 inch ³ /min 4,7 l/min	72 inch ³ /min 1,2 l/min	54 inch ³ /min 1,1 l/min
PE-554 Electric	10000	690	25 Amps 230V	678 inch ³ /min 11,3 l/min	426 inch ³ /min 7,1 l/min	72 inch ³ /min 1,2 l/min	54 inch ³ /min 1,1 l/min
PA-554 Pneumatic	10000	690	Required 1,4 CU.M/MIN at 6 Bar	678 inch ³ /min 11,3 l/min	426 inch ³ /min 7,1 l/min	72 inch ³ /min 1,2 l/min	54 inch ³ /min 0,9 l/min

CPPZ-1000 - RECOMMENDATION


The most popular pump for wide range of pullers is CPPZ-1000.



Super Jenny



HPR-30





CP 1000 SERIES

ACCESSORIES

PARALLEL GEAR DRIVE

L=235 W=33 H=70 MM

For use inside the header boxes where hand holes are not in line with tube centerline.

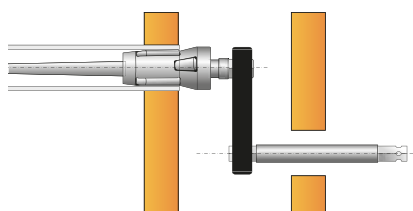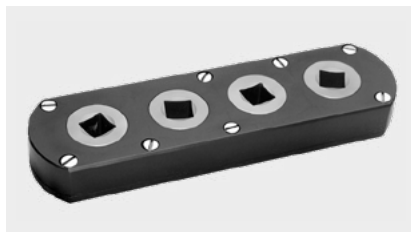


SQUARE DRIVE		TOOL
[INCH]	[MM]	
1/2" x 1/2"	12,7 x 12,7	P-Drive-127
3/4" x 3/4"	19,0 x 19,0	P-Drive-190
1" x 1"	25,4 x 25,4	P-Drive-254

RIGHT ANGLE GEAR DRIVE

L=292 W=45 H=98 MM


For use inside header boxes where handholds are at right angle to the tube centerline. For hand and power use.

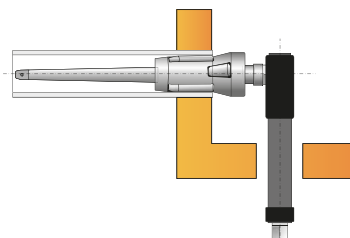

SQUARE DRIVE		TOOL
[INCH]	[MM]	
1/2" x 1/2"	12,7 x 12,7	RA-Drive-127
3/4" x 3/4"	19 x 19	RA-Drive-190
3/4" x 1"	19 x 25,4	RA-Drive-254

DOUBLE UNIVERSAL JOINT


Double Universal Joint and Double Universal Joint with Quick Change Chuck.

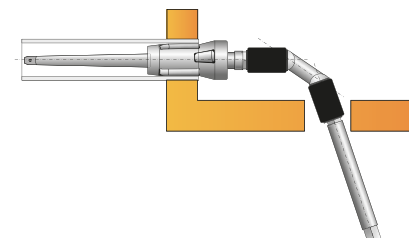

SQUARE DRIVE	TOOL	CHUCK
3/8"	DUJ-3/8	-
	DUJ-3/8-QCC	QCC
1/2"	DUJ-1/2	-
	DUJ-1/2-QCC	QCC
3/4"	DUJ-3/4	FxF
1"	DUJ-1	FxF

EXTENSIONS


Extensions and extensions with Quick Change Chuck (QCC), single and double.

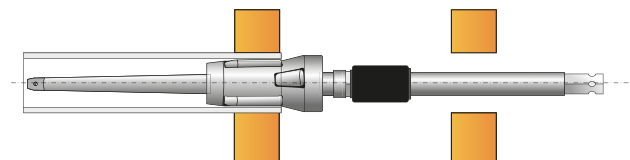

SQUARE DRIVE	TOOL	LENGTHS		QCC
		[INCH]	[MM]	
3/8"	Ext-3/8	8; 12; 24; 36	200; 300; 600; 900	-
	Ext-3/8-QCC	8; 12; 24; 36	200; 300; 600; 900	1
	Ext-3/8-2QCC	8; 12; 24; 36	200; 300; 600; 900	2
1/2"	Ext-1/2	8; 12; 24; 36	200; 300; 600; 900	-
	Ext-1/2-QCC	8; 12; 24; 36	200; 300; 600; 900	1
	Ext-1/2-2QCC	8; 12; 24; 36	200; 300; 600; 900	2
3/4"	Ext-3/4	8; 12; 24; 36	200; 300; 600; 900	-
1"	Ext-1	8; 12; 24; 36	200; 300; 600; 900	-

SINGLE UNIVERSAL JOINT


Single Universal Joint and Single Universal joint with Quick Change Chuck (QCC).

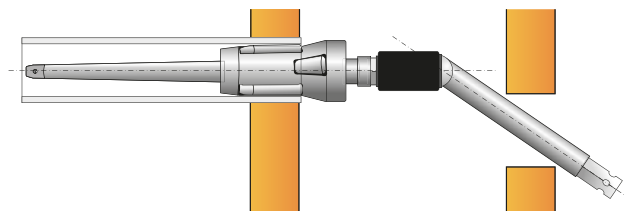

SQUARE	TOOL	AVAILABLE LENGTHS		QCC
		[INCH]	[MM]	
3/8	SUJ-3/8	8; 12; 24; 36	200; 300; 600; 900	-
	SUJ-3/8-QCC	8; 12; 24; 36	200; 300; 600; 900	+
1/2	SUJ-1/2	8; 12; 24; 36	200; 300; 600; 900	-
	SUJ-1/2-QCC	8; 12; 24; 36	200; 300; 600; 900	+
3/4	SUJ-3/4	8; 12; 24	200; 300; 600	-
1	SUJ-1	8; 12; 24	200; 300; 600	-

TUBE GUIDE

The Tube Guide consist of a steel or aluminium or plastic tapered head and an replaceable nylon brush, and it's used to guide tubes through the sheets and the tube support plates during tube bundles assembling. The nylon brush fits in the tube end, holding pilot firmly in place.

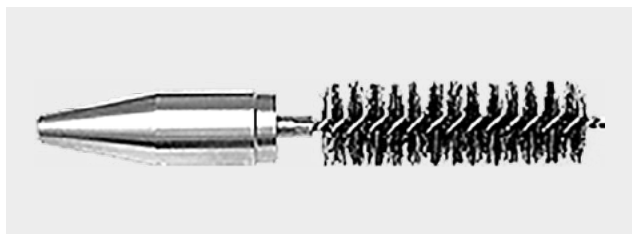

TUBE OD		TUBE GAUGE	TUBE GUIDE
[INCH]	[MM]		
1/2	12,7	16-18	TG-1
		19-20	TG-2
		21-23	TG-3
5/8	15,88	12-13	TG-4
		14-16	TG-5
		17-20	TG-6
		22-24	TG-7
3/4	19,05	10-12	TG-8
		13-16	TG-9
		17-20	TG-10
		21-22	TG-11
7/8	22,2	10-12	TG-12
		13-16	TG-13
		17-20	TG-14
		22-24	TG-15
1	25,4	8-9	TG-16
		10-12	TG-17
		13-16	TG-18
		17-20	TG-19
1-1/4	31,7	21-23	TG-20
		15.	TG-21
1-1/2	38,1	16-	TG-22
		15.	TG-23
		16-	TG-24

URH-1925 UNIVERSAL RATCHET HANDLE

Manual drive for tube expanders. One side 3/4" square drive, other side 1" square drive. Allows rotation transmitted by a ratched mechanism.




MOTOR COUPLING

Motor coupling and Motor coupling with Quick Change Chuck (QCC)



SQUARE	TOOL	LENGTH	QCC
3/8	MT-2x3/8"	2"	
	MT-2x3/8"-QCC	2"	YES
1/2	MT-2x1/2	2"	
	MT-2x1/2"-QCC	2"	YES
3/8	MT-2x3/8"	2"	
1/2	MT-3x1/2"	3"	
3/4	MT-3x3/4"	3"	
1	MT-4x1"	4"	


ONE PIECE TUBE PLUGS

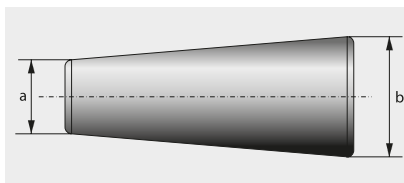

TUBE OD		TUBE GAUGE	A		B		TUBE PLUG
[INCH]	[MM]		[INCH]	[MM]	[INCH]	[MM]	
3/8	9,5	15-22	0,176	4,47	0,388	9,86	TP-1.**
1/2	12,7	11-14	0,176	4,48	0,388	9,87	TP-1.**
		15-22	0,301	7,65	0,513	13,00	TP-2.**
5/8	15,8	11-14	0,301	7,66	0,513	13,01	TP-2.**
		15-22	0,426	10,82	0,638	16,20	TP-3.**
3/4	19,05	11-14	0,426	10,83	0,638	16,21	TP-3.**
		15-22	0,551	14,00	0,763	19,38	TP-4.**
7/8	22,22	11-14	0,551	14,01	0,763	19,39	TP-4.**
		15-22	0,676	17,17	0,888	22,56	TP-5.**
1	25,4	11-14	0,676	17,18	0,888	22,57	TP-5.**
		15-22	0,801	20,35	1,013	25,73	TP-6.**
1-1/8	28,6	11-14	0,801	20,36	1,013	25,74	TP-6.**
		15-22	0,926	23,52	1,138	28,9	TP-7.**
1-1/4	31,7	11-14	0,926	23,53	1,138	28,10	TP-7.**
		15-22	1,015	25,78	1,263	32,08	TP-8.**
1-3/8	34,9	11-14	1,015	25,79	1,263	32,09	TP-8.**
		15-22	1,176	29,87	1,388	35,87	TP-9.**
1-1/2	38,1	11-14	1,176	29,88	1,388	35,88	TP-9.**
		15-22	1,301	32,66	1,513	38,93	TP-10.**

** Specify material: AL for Aluminium; S for Steel; S for Stainless Steel; B for Brass; M for Monel

TWO PIECE TUBE PLUGS

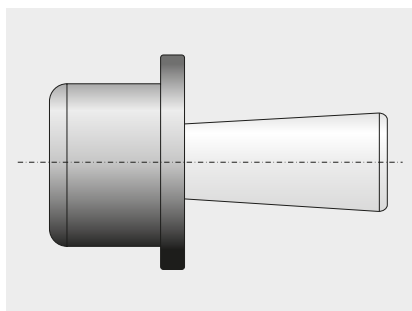

Ideal for sealing leaky tubes in condenser and heat exchangers. It is recommended to use our ORTC - one revolution tube cutter to puncture the tube to ensure that pressure can not build up in the tube and cause the plug loosen or blow out.

TUBE OD		TUBE GAUGE	TUBE ID		BRASS		CARBON STEEL		STAINLESS STEEL	
[INCH]	[MM]	BWG	[INCH]	[MM]	RING	PIN	RING	PIN	RING	PIN
5/8	15,88	13	0,44	11,18	T8TP445BR	TP3BP	T8TP445CS	TP3CSP	T8TP445SS	TP3SSP
		14	0,46	11,68	T8TP469BR	TP3BP	T8TP469CS	TP3CSP	T8TP469SS	TP3SSP
		15	0,48	12,19	T8TP491BR	TP3BP	T8TP491CS	TP3CSP	T8TP491SS	TP3SSP
		16	0,5	12,70	T8TP505BR	TP4BP	T8TP505CS	TP4CSP	T8TP505SS	TP4SSP
		17	0,51	12,95	T8TP519BR	TP4BP	T8TP519CS	TP4CSP	T8TP519SS	TP4SSP
		18	0,53	13,46	T8TP537BR	TP4BP	T8TP537CS	TP4CSP	T8TP537SS	TP4SSP
		19	0,54	13,72	T8TP551BR	TP4BP	T8TP551CS	TP4CSP	T8TP551SS	TP4SSP
		20	0,56	14,22	T8TP571BR	TP4BP	T8TP571CS	TP4CSP	T8TP571SS	TP4SSP
		21	0,56	14,22	T8TP571BR	TP4BP	T8TP571CS	TP4CSP	T8TP571SS	TP4SSP
3/4	19,05	22	0,57	14,48	T8TP571BR	TP4BP	T8TP571CS	TP4CSP	T8TP571SS	TP4SSP
		12	0,53	13,46	T8TP537BR	TP4BP	T8TP537CS	TP4CSP	T8TP537SS	TP4SSP
		13	0,56	14,22	T8TP571BR	TP4BP	T8TP571CS	TP4CSP	T8TP571SS	TP4SSP
		14	0,58	14,73	T8TP594BR	TP5BP	T8TP594CS	TP5CSP	T8TP594SS	TP5SSP
		15	0,61	15,49	T8TP616BR	TP5BP	T8TP616CS	TP5CSP	T8TP616SS	TP5SSP
		16	0,62	15,75	T8TP630BR	TP5BP	T8TP630CS	TP5CSP	T8TP630SS	TP5SSP
		17	0,63	16,00	T8TP644BR	TP5BP	T8TP644CS	TP5CSP	T8TP644SS	TP5SSP
		18	0,65	16,51	T8TP662BR	TP5BP	T8TP662CS	TP5CSP	T8TP662SS	TP5SSP
		19	0,67	17,02	T8TP676BR	TP5BP	T8TP676CS	TP5CSP	T8TP676SS	TP5SSP
7/8	22,2	20	0,68	17,27	T8TP696BR	TP6BP	T8TP696CS	TP6CSP	T8TP696SS	TP6SSP
		21	0,69	17,53	T8TP696BR	TP6BP	T8TP696CS	TP6CSP	T8TP696SS	TP6SSP
		22	0,69	17,53	T8TP696BR	TP6BP	T8TP696CS	TP6CSP	T8TP696SS	TP6SSP
		12	0,66	16,76	T8TP662BR	TP6BP	T8TP662CS	TP6CSP	T8TP662SS	TP6SSP
		13	0,69	17,53	T8TP696BR	TP6BP	T8TP696CS	TP6CSP	T8TP696SS	TP6SSP
		14	0,71	18,03	T8TP719BR	TP6BP	T8TP719CS	TP6CSP	T8TP719SS	TP6SSP
		15	0,73	18,54	T8TP741BR	TP6BP	T8TP741CS	TP6CSP	T8TP741SS	TP6SSP
		16	0,75	19,05	T8TP755BR	TP6BP	T8TP755CS	TP6CSP	T8TP755SS	TP6SSP
		17	0,76	19,30	T8TP769BR	TP6BP	T8TP769CS	TP6CSP	T8TP769SS	TP6SSP
1	25,4	18	0,78	19,81	T8TP787BR	TP7BP	T8TP787CS	TP7CSP	T8TP787SS	TP7SSP
		19	0,79	20,07	T8TP801BR	TP7BP	T8TP801CS	TP7CSP	T8TP801SS	TP7SSP
		20	0,81	20,57	T8TP821BR	TP7BP	T8TP821CS	TP7CSP	T8TP821SS	TP7SSP
		21	0,81	20,57	T8TP821BR	TP7BP	T8TP821CS	TP7CSP	T8TP821SS	TP7SSP
		22	0,82	20,83	T8TP821BR	TP7BP	T8TP821CS	TP7CSP	T8TP821SS	TP7SSP
		12	0,78	19,81	T8TP787BR	TP7BP	T8TP787CS	TP7CSP	T8TP787SS	TP7SSP
		13	0,81	20,57	T8TP821BR	TP7BP	T8TP844CS	TP7CSP	T8TP844SS	TP7SSP
		14	0,83	21,08	T8TP844BR	TP7BP	T8TP844CS	TP7CSP	T8TP844SS	TP7SSP
		15	0,86	21,84	T8TP866BR	TP7BP	T8TP866CS	TP7CSP	T8TP866SS	TP7SSP
		16	0,87	22,10	T8TP880BR	TP8BP	T8TP880CS	TP8CSP	T8TP880SS	TP8SSP
		17	0,88	22,35	T8TP894BR	TP8BP	T8TP894CS	TP8CSP	T8TP894SS	TP8SSP
		18	0,9	22,86	T8TP912BR	TP8BP	T8TP912CS	TP8CSP	T8TP912SS	TP8SSP
		19	0,92	23,37	T8TP926BR	TP8BP	T8TP926CS	TP8CSP	T8TP926SS	TP8SSP
		20	0,93	23,62	T8TP946BR	TP8BP	T8TP946CS	TP8CSP	T8TP946SS	TP8SSP
		21	0,94	23,88	T8TP946BR	TP8BP	T8TP946CS	TP8CSP	T8TP946SS	TP8SSP
		22	0,94	23,88	T8TP946BR	TP8BP	T8TP946CS	TP8CSP	T8TP946SS	TP8SSP

VACUUM LEAK TESTER KVLD-3000

The vacuum leak tester KVLD-3000 is a simple, precise method of testing tubes in boilers, condensers, and heat exchangers. It is the fastest, most accurate means of locating leaky tubes for plugging or replacement.

FEATURES

- ▶ Only one tool necessary for testing multiple tube sizes.
- ▶ Built-in easy to read vacuum gauge.
- ▶ Muffled exhaust for quiet operation.
- ▶ Lightweight, easy to use.

SPECIFICATIONS

- ▶ Cover wide range of tubes with one unit (tube sizes: 1/4" (6,3) to 3" (76,2 mm)).
- ▶ Requires 90 PSI (6,2 bar) compressed air.
- ▶ Air consumption: 26 C.F.M. (720 l/min).
- ▶ Carrying case measures: 16" x 12" x 4" (410 x 300 x 85 mm).
- ▶ Tool weight: 4,4 lbs (1,2 kg).
- ▶ Approximate shipping weight: 6,6 lbs (3,0 kg).




NOZZLES AVAILABLE

PART NUMBER	TUBE OD
K-1002	1/4" (6,3 mm) - 3/4" (19 mm)
K-1003	5/8" (15,9 mm) - 1 1/4" (31,7 mm)
K-1004	1 1/8" (28,6 mm) - 2" (50,8 mm)
K-1005	1 7/8" (47,6 mm) - 3" (76,2 mm)

OPERATING INSTRUCTIONS

1. Seal far end of tube to be tested with "t" handle type tube plug or optional snap type tube plug.
2. Place nozzle of tester into near end of tube.
3. Squeeze trigger of test unit until gauge reaches desired reading.
4. Release trigger and observe gauge.
5. A steady reading on gauge indicates no leaks.
6. Move to next tube and repeat.

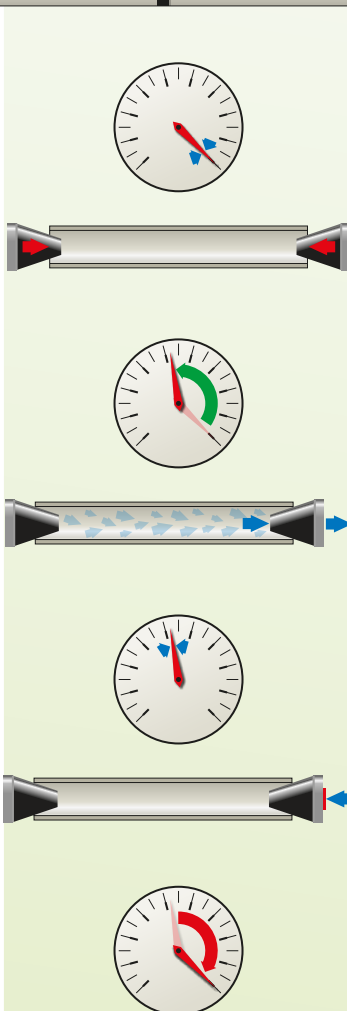

TESTING PUMPS

All testing pumps are delivered „ready for use“ and equipped with:

- 】 Tank (Except PEM 30)
- 】 Pressure gauge
- 】 Drain valve
- 】 Flexibe hose. 16" long. (3" for PEM 30 / 6" for PEM 40)

The seals used are made for usage with water, fluid oil or gas-oil.
Please call us any other liquids.

PEM HAND OPERATED PUMPS



LE-PTP ELECTRIC PUMPS



PTP1201 PNEUMATIC PUMPS



MODEL	DRIVEN	SERVICE PRESSURE		DIAMETER	STROKE	VOLUME PER STROKE		TANK CAPACITY		WEIGHT	
		BAR	PSI	MM	MM	CM ³	IN ³	LITRES	U.S.G	KG	LBS
PEM 30	Hand	30	400	14	400	61	3,7	-	-	4,2	9,3
PEM 40		60	850	20	34	10	0,6	14	3,7	6,3	14
PEM 50		50	700	30	40	28	1,7	45	11,9	13	29
PEM 100		100	1400	22	40	15	0,9	45	11,9	13	29
PEM 200		200	2800	50x16	40	78x8	48x0,5	45	11,9	18	40
PEM 600		600	8500	32x12	40	32x4	2x0,25	60	15,9	35	77,8
PEM 1000		1000	14000	32x8	40	32x2	2x0,12	60	15,9	35	77,8
LE-PTP 180	ELECTIRC	180	2548	-	-	-	-	100	26,45	60	132,3
PTP 1201	PNEUMATIC	720*	10200*	-	-	-	-	10	2,64	21	46,3

* depends on air pressure

THICKNESS OF WALL IN BIRMINGHAM WIRE GAGE AND IN DECIMAL INCHES

TUBE		20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
O.D.	I.D.	.035	.042	.049	.058	.065	.072	.083	.095	.109	.120	.134	.148	.165	.180	.203	.220	.238	.259	.284	.300	.340
1/2	Min.	.422	.408	.392	.373	.357	.342	.318	.291	.260	.236											
	Nom.	.430	.416	.402	.384	.370	.356	.334	.310	.282	.260											
5/8	Min.	.547	.533	.517	.498	.482	.467	.443	.417	.385	.361	.330	.299	.262	.229							
	Nom.	.555	.541	.527	.509	.495	.481	.459	.435	.407	.385	.357	.329	.295	.265							
3/4	Min.	.672	.658	.642	.623	.607	.592	.568	.542	.510	.486	.455	.424	.387	.354	.303	.266	.226	.180			
	Nom.	.680	.666	.652	.634	.620	.606	.584	.560	.532	.510	.482	.454	.420	.390	.344	.310	.274	.232			
7/8	Min.	.797	.783	.767	.747	.732	.717	.693	.666	.636	.611	.580	.549	.512	.479	.428	.391	.351	.305			
	Nom.	.805	.791	.777	.759	.745	.731	.709	.685	.657	.635	.607	.579	.545	.515	.469	.435	.399	.357			
1	Min.	.922	.908	.892	.873	.857	.842	.818	.791	.761	.736	.706	.675	.637	.604	.553	.516	.476	.430	.375	.340	.252
	Nom.	.930	.916	.902	.884	.870	.856	.834	.810	.782	.760	.732	.704	.670	.640	.594	.560	.524	.482	.432	.400	.320
1-1/8	Min.	1.047	1.033	1.017	.997	.982	.967	.943	.916	.886	.861	.831	.800	.762	.729	.678	.641	.601	.555	.500	.465	.377
	Nom.	1.055	1.041	1.027	1.009	.995	.981	.959	.935	.907	.885	.857	.829	.795	.765	.719	.685	.649	.607	.557	.525	.445
1-1/4	Min.	1.172	1.158	1.142	1.122	1.107	1.092	1.068	1.041	1.011	.986	.956	.925	.887	.854	.803	.766	.726	.680	.625	.590	.502
	Nom.	1.180	1.166	1.152	1.134	1.120	1.106	1.084	1.060	1.032	.1010	.982	.954	.920	.890	.844	.810	.774	.732	.682	.650	.570
1-3/8	Min.	1.297	1.283	1.267	1.247	1.232	1.217	1.192	1.166	1.136	.111	1.081	.049	1.012	.979	.928	.891	.851	.805	.750	.715	.627
	Nom.	1.305	1.291	1.277	1.259	1.245	1.231	1.209	1.185	1.157	1.135	1.107	.079	1.045	1.015	.969	.935	.899	.857	.807	.775	.695
1-1/2	Min.	1.422	1.408	1.392	1.372	1.357	1.342	1.318	1.291	1.260	1.236	1.205	1.174	1.137	1.104	1.053	1.016	.976	.930	.875	.840	.752
	Nom.	1.430	1.426	1.402	1.384	1.370	1.356	1.334	1.310	1.282	1.260	1.232	1.204	1.170	1.140	1.094	1.060	1.024	.982	.932	.900	.820
1-3/4	Min.	1.672	1.658	1.642	1.622	1.607	1.592	1.568	1.541	1.510	1.486	1.455	1.424	1.387	1.354	1.303	1.266	1.226	1.180	1.125	1.090	1.002
	Nom.	1.680	1.666	1.652	1.634	1.620	1.606	1.584	1.560	1.532	1.510	1.482	1.454	1.420	1.390	1.344	1.310	1.274	1.232	1.182	1.150	1.070
2	Min.	1.922	1.908	1.892	1.872	1.857	1.842	1.817	1.791	1.760	1.736	1.705	1.674	1.637	1.604	1.553	1.516	1.476	1.430	1.375	1.340	1.252
	Nom.	1.930	1.916	1.902	1.884	1.870	1.856	1.834	1.810	1.782	1.760	1.732	1.704	1.670	1.640	1.594	1.560	1.524	1.482	1.432	1.400	1.320
2-1/4	Min.	2.172	2.158	2.142	2.122	2.107	2.092	2.067	2.041	2.010	1.986	1.955	1.924	1.887	1.854	1.803	1.766	1.726	1.680	1.625	1.590	1.502
	Nom.	2.180	2.166	2.152	2.134	2.120	2.106	2.084	2.060	2.032	2.010	1.982	1.954	1.920	1.890	1.844	1.810	1.774	1.732	1.682	1.650	1.570
2-1/2	Min.	2.422	2.408	2.392	2.372	2.357	2.342	2.317	2.291	2.260	2.236	2.205	2.174	2.137	2.104	2.053	2.016	1.976	1.930	1.875	1.840	1.752
	Nom.	2.430	2.416	2.402	2.384	2.370	2.356	2.334	2.310	2.282	2.260	2.232	2.204	2.170	2.140	2.094	2.060	2.024	1.982	1.932	1.900	1.820
2-3/4	Min.	2.672	2.658	2.642	2.622	2.607	2.592	2.567	2.541	2.510	2.486	2.455	2.424	2.387	2.354	2.303	2.266	2.226	2.180	2.125	2.090	2.002
	Nom.	2.680	2.666	2.652	2.634	2.620	2.606	2.584	2.560	2.532	2.510	2.482	2.454	2.420	2.390	2.344	2.310	2.274	2.232	2.182	2.150	2.070
3	Min.	2.922	2.908	2.892	2.872	2.857	2.842	2.817	2.791	2.760	2.736	2.705	2.674	2.636	2.604	2.553	2.516	2.476	2.430	2.375	2.340	2.252
	Nom.	2.930	2.916	2.902	2.884	2.870	2.856	2.834	2.810	2.782	2.760	2.732	2.704	2.670	2.640	2.594	2.560	2.524	2.482	2.432	2.400	2.320
3-1/4	Min.	3.172	3.158	3.142	3.122	3.107	3.092	3.067	3.041	3.010	2.986	2.955	2.924	2.887	2.854	2.803	2.766	2.726	2.680	2.625	2.590	2.502
	Nom.	3.180	3.166	3.152	3.134	3.120	3.106	3.084	3.060	3.032	3.010	2.982	2.954	2.920	2.890	2.844	2.810	2.774	2.732	2.682	2.650	2.570
3-1/2	Min.	3.422	3.408	3.392	3.372	3.357	3.342	3.317	3.291	3.260	3.236	3.205	3.174	3.137	3.104	3.053	3.016	2.976	2.930	2.875	2.840	2.752
	Nom.	3.430	3.416	3.402	3.384	3.370	3.356	3.334	3.310	3.282	3.260	3.232	3.204	3.170	3.140	3.094	3.060	3.024	2.982	2.932	2.900	2.820
3-3/4	Min.	3.672	3.658	3.642	3.622	3.607	3.592	3.567	3.541	3.510	3.486	3.455	3.424	3.387	3.354	3.303	3.266	3.226	3.180	3.125	3.090	3.002
	Nom.	3.680	3.666	3.652	3.634	3.620	3.606	3.584	3.560	3.532	3.510	3.482	3.454	3.420	3.390	3.344	3.310	3.274	3.232	3.182	3.150	3.070
4	Min.	3.922	3.908	3.892	3.872	3.857	3.842	3.817	3.791	3.760	3.736	3.705	3.674	3.637	3.604	3.553	3.516	3.476	3.430	3.375	3.340	3.252
	Nom.	3.930	3.916	3.902	3.884	3.870	3.856	3.834	3.810	3.782	3.760	3.732	3.704	3.670	3.640	3.594	3.560	3.524	3.482	3.432	3.400	3.320
4-1/2	Min.	4.422	4.408	4.392	4.372	4.357	4.342	4.317	4.291	4.260	4.236	4.205	4.174	4.137	4.104	4.053	4.016	3.976	3.930	3.875	3.840	3.752
	Nom.	4.430	4.416	4.402	4.384	4.370	4.356	4.334	4.310	4.282	4.260	4.232	4.204	4.170	4.140	4.094	4.060	4.024	3.982	3.932	3.900	3.820
5	Min.	4.922	4.908	4.892	4.872	4.857	4.842	4.817	4.791	4.760	4.736	4.705	4.674	4.637	4.604	4.553	4.516	4.476	4.430	4.375	4.340	4.252
	Nom.	4.930	4.916	4.902	4.884	4.870	4.856	4.834	4.810	4.782	4.780	4.732	4.704	4.670	4.640	4.594	4.560	4.524	4.482	4.432	4.400	4.320

ADDITIONAL BIRMINGHAM WIRE GAGES

NUMBER	36	35	34	33	32	31	30	29	28	27	26	25	24	23	22	21	00	000	0000	00000
DECIMAL	.004	.005	.007	.008	.009	.010	.012	.013	.014	.016	.018	.020	.022	.025	.028	.032	.380	.425	.454	.500

THICKNESS OF WALL IN BIRMINGHAM WIRE GAGE IN MILLIMETERS

TUBE		20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
O.D.	I.D.	.9	1.1	1.2	1.5	1.7	1.8	2.1	2.4	2.8	3.0	3.4	3.8	4.2	4.6	5.2	5.6	6.0	6.6	7.2	7.6	8.6
127	Min.	10.7	10.4	10.0	9.5	9.1	8.7	8.1	7.4	6.6	6.0											
	Nom.	10.9	10.6	10.2	9.8	9.4	9.0	8.5	7.9	7.2	6.6											
159	Min.	13.9	13.5	13.1	12.6	12.2	11.9	11.3	10.6	9.8	9.2	8.4	7.6	6.7	5.8							
	Nom.	14.1	13.7	13.4	12.9	12.6	12.2	11.7	11.0	10.3	9.8	9.1	8.4	7.5	6.7							
191	Min.	17.1	16.7	16.3	15.8	15.4	15.0	14.4	13.8	13.0	12.3	11.6	10.8	9.8	9.0	7.7	6.8	5.7	4.6			
	Nom.	17.3	16.9	16.6	16.1	15.7	15.4	14.8	14.2	13.5	13.0	12.2	11.5	10.7	9.9	8.7	7.9	7.0	5.9			
222	Min.	20.2	19.9	19.5	19.0	18.6	18.2	17.6	16.9	16.2	15.5	14.7	13.9	13.0	12.2	10.9	9.9	8.9	7.7			
	Nom.	20.4	20.1	19.7	19.3	18.9	18.6	18.0	17.4	16.7	16.1	15.4	14.7	13.8	13.1	11.9	11.0	10.1	9.1			
254	Min.	23.4	23.1	22.7	22.2	21.8	21.4	20.8	20.1	19.3	18.7	17.9	17.1	16.2	15.3	14.0	13.1	12.1	10.9	9.5	8.6	6.4
	Nom.	23.6	23.3	22.9	22.5	22.1	21.7	21.2	20.6	19.9	19.3	18.6	17.9	17.0	16.3	15.1	14.2	13.3	12.2	11.0	10.2	8.1
28.6	Min.	26.6	26.2	25.8	25.3	24.9	24.6	24.0	23.3	22.5	21.9	21.1	20.3	19.4	18.5	17.2	16.3	15.3	14.1	12.7	11.8	9.6
	Nom.	26.8	26.4	26.1	25.6	25.3	24.9	24.4	23.7	23.0	22.5	21.8	21.1	20.2	19.4	18.3	17.4	16.5	15.4	14.1	13.3	11.3
31.8	Min.	29.8	29.4	29.0	28.5	28.1	27.7	27.1	26.4	25.7	25.0	24.3	23.5	22.5	21.7	20.4	19.5	18.4	17.3	15.9	15.0	12.8
	Nom.	30.0	29.6	29.3	28.8	28.4	28.1	27.5	26.9	26.2	25.7	24.9	24.2	23.4	22.6	21.4	20.6	19.7	18.6	17.3	16.5	14.5
34.9	Min.	32.9	32.6	32.2	31.7	31.3	30.9	30.3	29.6	28.9	28.2	27.5	26.6	25.7	24.9	23.6	22.6	21.6	20.4	19.1	18.2	15.9
	Nom.	33.1	32.8	32.4	32.0	31.6	31.3	30.7	30.1	29.4	28.8	28.1	27.4	26.5	25.8	24.6	23.7	22.8	21.8	20.5	19.7	17.7
381	Min.	36.1	35.8	35.4	34.8	34.5	34.1	33.5	32.8	32.0	31.4	30.6	29.8	28.9	28.0	26.7	25.8	24.8	23.6	22.2	21.3	19.1
	Nom.	36.3	36.2	35.6	35.2	34.8	34.4	33.9	33.3	32.6	32.0	31.3	30.6	29.7	29.0	27.8	26.9	26.0	24.9	23.7	22.9	20.8
44.5	Min.	42.5	42.1	41.7	41.2	40.8	40.4	39.8	39.1	38.4	37.7	37.0	36.2	35.2	34.4	33.1	32.2	31.1	30.0	28.6	27.7	25.5
	Nom.	42.7	42.3	42.0	41.5	41.1	40.8	40.2	39.6	38.9	38.4	37.6	36.9	36.1	35.3	34.1	33.3	32.4	31.3	30.0	29.2	27.2
50.8	Min.	48.8	48.5	48.1	47.5	47.2	46.8	46.2	45.5	44.7	44.1	43.3	42.5	41.6	40.7	39.4	38.5	37.5	36.3	34.9	34.0	31.8
	Nom.	49.0	48.7	48.3	47.9	47.5	47.1	46.6	46.0	45.3	44.7	44.0	43.3	42.4	41.7	40.5	39.6	38.7	37.6	36.4	35.6	33.5
57.2	Min.	55.2	54.8	54.4	53.9	53.5	53.1	52.5	51.8	51.1	50.4	49.7	48.9	47.9	47.1	45.8	44.9	43.8	42.7	41.3	40.4	38.2
	Nom.	55.4	55.0	54.7	54.2	53.8	53.5	52.9	52.3	51.6	51.1	50.3	49.6	48.8	48.0	46.8	46.0	45.1	44.0	42.7	41.9	39.9
63.5	Min.	61.5	61.2	60.8	60.2	59.9	59.5	58.9	58.2	57.4	56.8	56.0	55.2	54.3	53.4	52.1	51.2	50.2	49.0	47.6	46.7	44.5
	Nom.	61.7	61.4	61.0	60.6	60.2	59.8	59.3	58.7	58.0	57.4	56.7	56.0	55.1	54.4	53.2	52.3	51.4	50.3	49.1	48.3	46.2
69.9	Min.	67.9	67.5	67.1	66.6	66.2	65.8	65.2	64.5	63.8	63.1	62.4	61.6	60.6	59.8	58.5	57.6	56.5	55.4	54.0	53.1	50.9
	Nom.	68.1	67.7	67.4	66.9	66.5	66.2	65.6	65.0	64.3	63.8	63.0	62.3	61.5	60.7	59.5	58.7	57.8	56.7	55.4	54.6	52.6
76.2	Min.	74.2	73.9	73.5	72.9	72.6	72.2	71.6	70.9	70.1	69.5	68.7	67.9	67.0	66.1	64.8	63.9	62.9	61.7	60.3	59.4	57.2
	Nom.	74.4	74.1	73.7	73.3	72.9	72.5	72.0	71.4	70.7	70.1	69.4	68.7	67.8	67.1	65.9	65.0	64.1	63.0	61.8	61.0	58.9
82.6	Min.	80.6	80.2	79.8	79.3	78.9	78.5	77.9	77.2	76.5	75.8	75.1	74.3	73.3	72.5	71.2	70.3	69.2	68.1	66.7	65.8	63.6
	Nom.	80.8	80.4	80.1	79.6	79.2	78.9	78.3	77.7	77.0	76.5	75.7	75.0	74.2	73.4	72.2	71.4	70.5	69.4	68.1	67.3	65.3
88.9	Min.	86.9	86.6	86.2	85.6	85.3	84.9	84.3	83.6	82.8	82.2	81.4	80.6	79.7	78.8	77.5	76.6	75.6	74.4	73.0	72.1	69.9
	Nom.	87.1	86.8	86.4	86.0	85.6	85.2	84.7	84.1	83.4	82.8	82.1	81.4	80.5	79.8	78.6	77.7	76.8	75.7	74.5	73.7	71.6
95.3	Min.	93.3	92.9	92.5	92.0	91.6	91.2	90.6	89.9	89.2	88.5	87.8	87.0	86.0	85.2	83.9	83.0	81.9	80.8	79.4	78.5	76.3
	Nom.	93.5	93.1	92.8	92.3	91.9	91.6	91.0	90.4	89.7	89.2	88.4	87.7	86.9	86.1	84.9	84.1	83.2	82.1	80.8	80.0	78.0
101.6	Min.	99.6	99.3	98.9	98.3	98.0	97.6	97.0	96.3	95.5	94.9	94.1	93.3	92.4	91.5	90.2	89.3	88.3	87.1	85.7	84.8	82.6
	Nom.	99.8	99.5	99.1	98.7	98.3	97.9	97.4	96.8	96.1	95.5	94.8	94.1	93.2	92.5	91.3	90.4	89.5	88.4	87.2	86.4	84.3
114.3	Min.	112.3	112.0	111.6	111.0	110.7	110.3	109.7	109.0	108.2	107.6	106.8	106.0	105.1	104.2	102.9	102.0	101.0	99.8	98.4	97.5	95.3
	Nom.	112.5	112.2	111.8	111.4	111.0	110.6	110.1	109.5	108.8	108.2	107.5	106.8	105.9	105.2	104.0	103.1	102.2	101.1	99.9	99.1	97.0
127.3	Min.	125.0	124.7	124.3	123.7	123.4	123.0	122.4	121.7	120.9	120.3	119.5	118.7	117.8	116.9	115.6	114.7	113.7	112.5	111.1	110.2	108.0
	Nom.	125.2	124.9	124.5	124.1	123.7	123.3	122.8	122.2	121.5	120.9	120.2	119.5	118.6	117.9	116.7	115.8	114.9	113.8	112.6	111.8	109.7

ADDITIONAL BIRMINGHAM WIRE GAGES

NUMBER	36	35	34	33	32	31	30	29	28	27	26	25	24	23	22	21	00	000	0000	00000
MM	.1	.1	.2	.2	.2	.3	.3	.3	.4	.4	.5	.5	.6	.6	.7	.8	9.7	10.8	11.5	12.7

PIPE CHART [INCH]

SIZE	OUTER DIAMETER		SCHEDULE 5	SCHEDULE 10	SCHEDULE 20	SCHEDULE 30	SCHEDULE 40	STANDARD	SCHEDULE 60	SCHEDULE 80	X-HEAVY	SCHEDULE 100	SCHEDULE 120	SCHEDULE 140	SCHEDULE 160	XX-HEAVY
1/8	0,405	Wall thickness	0,035	0,049			0,068	0,068		0,095	0,095					
		Inside diameter	0,335				0,269	0,269		0,215	0,215					
1/4	0,540	Wall thickness	0,049	0,065			0,088	0,088		0,119	0,119					
		Inside diameter	0,442	0,410			0,364	0,364		0,302	0,302					
3/8	0,675	Wall thickness	0,049	0,065			0,091	0,091		0,126	0,126					
		Inside diameter	0,577	0,545			0,493	0,493		0,423	0,423					
1/2	0,840	Wall thickness	0,065	0,083			0,109	0,109		0,147	0,147				0,187	0,294
		Inside diameter	0,710	0,674			0,622	0,622		0,546	0,546				0,466	0,442
3/4	1,050	Wall thickness	0,065	0,083			0,113	0,113		0,154	0,154				0,218	0,308
		Inside diameter	0,920	0,884			0,824	0,824		0,742	0,742				0,614	0,434
1	1,315	Wall thickness	0,065	0,190			0,133	0,133		0,179	0,179				0,250	0,358
		Inside diameter	1,185	0,935			1,049	1,049		0,957	0,957				0,815	0,599
1 1/4	1,660	Wall thickness	0,065	0,109			0,140	0,140		0,191	0,191				0,250	0,382
		Inside diameter	1,530	1,442			1,380	1,380		1,278	1,278				1,160	0,896
1 1/2	1,900	Wall thickness	0,065	0,109			0,145	0,145		0,200	0,200				0,281	0,400
		Inside diameter	1,770	1,682			1,610	1,610		1,500	1,500				1,338	1,100
2	2,375	Wall thickness	0,065	0,109			0,154	0,154		0,218	0,218				0,343	0,436
		Inside diameter	2,245	2,157			2,067	2,067		1,939	1,939				1,689	1,503
2 1/2	2,875	Wall thickness	0,083	0,120			0,203	0,203		0,276	0,276				0,375	0,552
		Inside diameter	2,709	2,635			2,469	2,469		2,323	2,323				2,125	1,771
3	3,500	Wall thickness	0,083	0,120			0,216	0,216		0,300	0,300				0,437	0,600
		Inside diameter	3,334	3,260			3,068	3,068		2,900	2,900				2,626	2,300
3 1/2	4,000	Wall thickness	0,083	0,120			0,226	0,226		0,318	0,318					0,636
		Inside diameter	3,834	3,760			3,548	3,548		3,364	3,364					2,728
4	4,500	Wall thickness	0,083	0,120			0,237	0,237	0,281	0,337	0,337		0,437		0,531	0,674
		Inside diameter	4,334	4,260			4,026	4,026	3,938	3,826	3,826		3,626		3,438	3,152
4 1/2	5,000	Wall thickness						0,247			0,355					0,710
		Inside diameter						4,506			4,290					3,580
5	5,563	Wall thickness	0,109	0,134			0,258	0,258		0,375	0,375		0,500		0,625	0,750
		Inside diameter	5,345	5,295			5,047	5,047		4,813	4,813				4,313	4,063
6	6,625	Wall thickness	0,109	0,134			0,280	0,280		0,432	0,432		0,562		0,718	0,864
		Inside diameter	6,407	6,357			6,065	6,065		5,761	5,761				5,189	4,897
7	7,625	Wall thickness						0,301			0,500					0,875
		Inside diameter						7,023			6,625					5,875
8	8,625	Wall thickness	0,109	0,148	0,250	0,277	0,322	0,322	0,406	0,500	0,500	0,593	0,718	0,812	0,906	0,875
		Inside diameter	8,407	8,329	8,125	8,071	7,981	7,981	7,813	7,625	7,625	7,439	7,189	7,001	6,813	6,875
9	9,625	Wall thickness						0,342			0,500					
		Inside diameter						8,941			8,625					
10	10,750	Wall thickness	0,134	0,165	0,250	0,307	0,365	0,365	0,500	0,593	0,500	0,718	0,843	1,000	1,125	
		Inside diameter	10,482	10,420	10,250	10,136	10,020	10,020	9,750	9,564	9,750	9,314	9,064	8,750	8,500	
11	11,750	Wall thickness						0,375			0,500					
		Inside diameter						11,000			10,750					
12	12,750	Wall thickness	0,156	0,180	0,250	0,330	0,406	0,375	0,562	0,687	0,500	0,843	1,000	1,125	1,312	
		Inside diameter	12,438	12,390	12,250	12,090	11,938	12,000	11,626	11,376	11,750	11,064	10,750	10,500	10,126	
14	14,000	Wall thickness	0,156	0,250	0,312	0,375	0,437	0,375	0,593	0,750	0,500	0,937	1,0930	1,250	1,406	
		Inside diameter	13,688	13,500	13,376	13,250	13,126	13,250	12,814	12,500	13,000	12,126	-7,860	11,500	11,188	
16	16,000	Wall thickness	0,165	0,250	0,312	0,375	0,500	0,375	0,656	0,843	0,500	1,031	1,218	1,437	1,593	
		Inside diameter	15,670	15,500	15,376	15,250	15,000	15,250	14,688	14,314	15,000	13,938	13,564	13,126	12,814	
18	18,000	Wall thickness	0,165	0,250	0,312	0,437	0,562	0,375	0,750	0,937	0,500	1,156	1,375	1,562	1,781	
		Inside diameter	17,670	17,500	17,376	17,126	16,876	17,250	16,500	16,126	17,000	15,688	15,250	14,876	14,438	
20	20,000	Wall thickness	0,188	0,250	0,375	0,500	0,593	0,375	0,812	1,031	0,500	1,280	1,500	1,750	1,968	
		Inside diameter	19,624	19,500	19,250	19,000	18,814	19,250	18,376	17,938	19,000	17,440	17,000	16,500	16,064	
24	24,000	Wall thickness	0,218	0,250	0,375	0,562	0,687	0,375	0,968	1,218	0,500	1,531	1,812	2,062	2,343	
		Inside diameter	23,564	23,500	23,250	22,876	22,626	23,250	22,064	21,564	23,000	20,938	20,376	19,876	19,314	
26	26,000	Wall thickness		0,312	0,500			0,375			0,500					
		Inside diameter		25,376	25,000			25,250			25,000					
28	28,000	Wall thickness		0,312	0,500	0,625		0,375			0,500					
		Inside diameter		27,376	27,000	26,750		27,250			27,000					
30	30,000	Wall thickness	0,250	0,312	0,500	0,625		0,375			0,500					
		Inside diameter	29,500	29,376	29,000	28,750		29,250			29,000					
32	32,000	Wall thickness		0,312	0,500	0,625	0,688	0,375			0,500					
		Inside diameter		31,376	31,000	30,750	30,624	31,250			31,000					
34	34,000	Wall thickness		0,344	0,500	0,625	0,688	0,375			0,500					
		Inside diameter		33,312	33,000	32,750	32,624	33,250								
36	36,000	Wall thickness		0,312	0,500	0,625	0,750	0,375			0,500					
		Inside diameter		35,376	35,000	34,750	34,500	35,250			35,000					
42	42,000	Wall thickness						0,375			0,500					
		Inside diameter						41,250			41,000					
48	48,000	Wall thickness						0,375			0,500					
		Inside diameter						47,250			47,000					

PIPE CHART [MM]

SIZE	OUTER DIAMETER		SCHEDULE 5	SCHEDULE 10	SCHEDULE 20	SCHEDULE 30	SCHEDULE 40	STANDARD	SCHEDULE 60	SCHEDULE 80	X-HEAVY	SCHEDULE 100	SCHEDULE 120	SCHEDULE 140	SCHEDULE 160	XK-HEAVY
1/8	10,28	Wall thickness	0,89	1,24			1,73	1,73		2,41	2,41					
		Inside diameter	8,51				6,83	6,83		5,46	5,46					
1/4	13,71	Wall thickness	1,24	1,65			2,24	2,24		3,02	3,02					
		Inside diameter	11,23	10,41			9,25	9,25		7,67	7,67					
3/8	17,14	Wall thickness	1,24	1,65			2,31	2,31		3,20	3,20					
		Inside diameter	14,66	13,84			12,52	12,52		10,74	10,74					
1/2	21,33	Wall thickness	1,65	2,11			2,77	2,77		3,73	3,73				4,75	7,47
		Inside diameter	18,03	17,12			15,80	15,80		13,87	13,87				11,84	11,23
3/4	26,67	Wall thickness	1,65	2,11			2,87	2,87		3,91	3,91				5,54	7,82
		Inside diameter	23,37	22,45			20,93	20,93		18,85	18,85				15,60	11,02
1	33,40	Wall thickness	1,65	4,83			3,38	3,38		4,55	4,55				6,35	9,09
		Inside diameter	30,10	23,75			26,64	26,64		24,31	24,31				20,70	15,21
1 1/4	42,16	Wall thickness	1,65	2,77			3,56	3,56		4,85	4,85				6,35	9,70
		Inside diameter	38,86	36,63			35,05	35,05		32,46	32,46				29,46	22,76
1 1/2	48,26	Wall thickness	1,65	2,77			3,68	3,68		5,08	5,08				7,14	10,16
		Inside diameter	44,96	42,72			40,89	40,89		38,10	38,10				33,99	27,94
2	60,32	Wall thickness	1,65	2,77			3,91	3,91		5,54	5,54				8,71	11,07
		Inside diameter	57,02	54,79			52,50	52,50		49,25	49,25				42,90	38,18
2 1/2	73,02	Wall thickness	2,11	3,05			5,16	5,16		7,01	7,01				9,53	14,02
		Inside diameter	68,81	66,93			62,71	62,71		59,00	59,00				53,98	44,98
3	88,90	Wall thickness	2,11	3,05			5,49	5,49		7,62	7,62				11,10	15,24
		Inside diameter	84,68	82,80			77,93	77,93		73,66	73,66				66,70	58,42
3 1/2	101,60	Wall thickness	2,11	3,05			5,74	5,74		8,08	8,08					16,15
		Inside diameter	97,38	95,50			90,12	90,12		85,45	85,45					69,29
4	114,30	Wall thickness	2,11	3,05			6,02	6,02	7,14	8,56	8,56		11,10		13,49	17,12
		Inside diameter	110,08	108,20			102,26	102,26	100,03	97,18	97,18		92,10		87,33	80,06
4 1/2	127,00	Wall thickness						6,27			9,02					18,03
		Inside diameter						114,45			108,97					90,93
5	141,30	Wall thickness	2,77	3,40			6,55	6,55		9,53	9,53		12,70		15,88	19,05
		Inside diameter	135,76	134,49			128,19	128,19		122,25	122,25				109,55	103,20
6	168,27	Wall thickness	2,77	3,40			7,11	7,11		10,97	10,97		14,27		18,24	21,95
		Inside diameter	162,74	161,47			154,05	154,05		146,33	146,33				131,80	124,38
7	193,67	Wall thickness						7,65			12,70					22,23
		Inside diameter						178,38			168,28					149,23
8	219,07	Wall thickness	2,77	3,76	6,35	7,04	8,18	8,18	10,31	12,70	12,70	15,06	18,24	20,62	23,01	22,23
		Inside diameter	213,54	211,56	206,38	205,00	202,72	202,72	198,45	193,68	193,68	188,95	182,60	177,83	173,05	174,63
9	244,47	Wall thickness						8,69			12,70					
		Inside diameter						227,10			219,08					
10	273,05	Wall thickness	3,40	4,19	6,35	7,80	9,27	9,27	12,70	15,06	12,70	18,24	21,41	25,40	28,58	
		Inside diameter	266,24	264,67	260,35	257,45	254,51	254,51	247,65	242,93	247,65	236,58	230,23	222,25	215,90	
11	298,45	Wall thickness						9,53			12,70					
		Inside diameter						279,40			273,05					
12	323,85	Wall thickness	3,96	4,57	6,35	8,38	10,31	9,53	14,27	17,45	12,70	21,41	25,40	28,58	33,32	
		Inside diameter	315,93	314,71	311,15	307,09	303,23	304,80	295,30	288,95	298,45	281,03	273,05	266,70	257,20	
14	355,60	Wall thickness	3,96	6,35	7,92	9,53	11,10	9,53	15,06	19,05	12,70	23,80	27,62	31,75	35,71	
		Inside diameter	347,68	342,90	339,75	336,55	333,40	336,55	325,48	317,50	330,20	308,00	-199,64	292,10	284,18	
16	406,40	Wall thickness	4,19	6,35	7,92	9,53	12,70	9,53	16,66	21,41	12,70	26,19	30,94	36,50	40,46	
		Inside diameter	398,02	393,70	390,55	387,35	381,00	387,35	373,08	363,58	381,00	354,03	344,53	333,40	325,48	
18	457,20	Wall thickness	4,19	6,35	7,92	11,10	14,27	9,53	19,05	23,80	12,70	29,36	34,93	39,67	45,24	
		Inside diameter	448,82	444,50	441,35	435,00	428,65	438,15	419,10	409,60	431,80	398,48	387,35	377,85	366,73	
20	508,00	Wall thickness	4,78	6,35	9,53	12,70	15,06	9,53	20,62	26,19	12,70	32,51	38,10	44,45	49,99	
		Inside diameter	498,45	495,30	488,95	482,60	477,88	488,95	466,75	455,63	482,60	442,98	431,80	419,10	408,03	
24	609,60	Wall thickness	5,54	6,35	9,53	14,27	17,45	9,53	24,59	30,94	12,70	38,89	46,02	52,37	59,51	
		Inside diameter	598,53	596,90	590,55	581,05	574,70	590,55	560,43	547,73	584,20	531,83	517,55	504,85	490,58	
26	660,40	Wall thickness		7,92	12,70			9,53			12,70					
		Inside diameter		644,55	635,00			641,35			635,00					
28	711,20	Wall thickness		7,92	12,70	15,88		9,53			12,70					
		Inside diameter		695,35	685,80	679,45		692,15			685,80					
30	762,00	Wall thickness	6,35	7,92	12,70	15,88		9,53			12,70					
		Inside diameter	749,30	746,15	736,60	730,25		742,95			736,60					
32	812,80	Wall thickness		7,92	12,70	15,88	17,48	9,53			12,70					
		Inside diameter		796,95	787,40	781,05	777,85	793,75			787,40					
34	863,60	Wall thickness		8,74	12,70	15,88	17,48	9,53			12,70					
		Inside diameter		846,12	838,20	831,85	828,65	844,55								
36	914,40	Wall thickness		7,92	12,70	15,88	19,05	9,53			12,70					
		Inside diameter		898,55	889,00	882,65	876,30	895,35			889,00					
42	1 066,80	Wall thickness						9,53			12,70					
		Inside diameter						1 047,75			1 041,40					
48	1 219,20	Wall thickness						9,53			12,70					
		Inside diameter						1 200,15			1 193,80					

WEIGHTS

GIVEN	MULTIPLY BY	TO OBTAIN
Grams	0.001	Kilograms
Grams	0.0353	Ounces
Grams	0.0022	Pounds
Kilograms	1 000.0	Grams
Kilograms	35.2740	Ounces
Kilograms	2.2046	Pounds
Ounces	28.3495	Grams
Ounces	0.0283	Kilograms
Ounces	0.0625	Pounds
Pounds	453.5924	Grams
Pounds	0.4536	Kilograms
Pounds	16.0	Ounces

MEASURES

GIVEN	MULTIPLY BY	TO OBTAIN
Centimeters	0.0328	Feet
Centimeters	0.3937	Inches
Centimeters	10.0	Millimeters
Centimeters	0.01	Meters
Feet	30.4801	Centimeters
Feet	12.0	Inches
Feet	304.801	Millimeters
Feet	0.3048	Meters
Inches	2.5400	Centimeters
Inches	0.0833	Feet
Inches	25.400	Millimeters
Inches	0.0254	Meters
Millimeters	0.1	Centimeters
Millimeters	0.00328	Feet
Millimeters	0.03937	Inches
Millimeters	0.001	Meters
Meters	100.0	Centimeters
Meters	3.2808	Feet
Meters	39.370	Inches
Meters	1 000.0	Millimeters

FLOW RATE


GIVEN	MULTIPLY BY	TO OBTAIN
Cubic feet per minute (CFM)	0.0283	Cubic meters per minute
Cubic feet per minute (CFM)	7.4805	Gallons per minute (GPM)
Cubic feet per minute (CFM)	28.3163	Liters per minute
Cubic meters per minute	35.3133	Cubic feet per minute (CFM)
Cubic meters per minute	264.170	Gallons per minute (GPM)
Cubic meters per minute	1 000.0	Liters per minute
Gallons per minute (GPM)	0.1337	Cubic feet per minute (CFM)
Gallons per minute (GPM)	0.0038	Cubic meters per minute
Gallons per minute (GPM)	3.7878	Liters per minute
Liters per minute	0.0353	Cubic feet per minute (CFM)
Liters per minute	0.001	Cubic meters per minute
Liters per minute	0.2641	Gallons per minute (GPM)

PRESSURE

GIVEN	MULTIPLY BY	TO OBTAIN
Bar	1.0197	Kilograms per square centimeter
Bar	14.5038	Pounds per square inch
Kilograms per square centimeter	.9807	Bar
Kilograms per square centimeter	14.22	Pounds per square inch
Pounds per square inch	.0689	Bar
Pounds per square inch	.0703	Kilograms per square centimeter

[illegible]



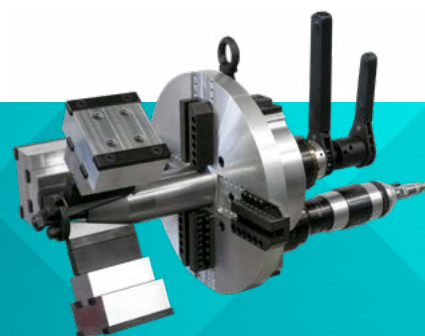

KRAIS Tube&Pipe Tools

Poland, 55-106 Zawonia, Czachowo 15

tel. +48 71 312 05 96, fax +48 71 387 03 32

email: export@krais.com

web: www.krais.com

 facebook.com/KraisTubeExpanders/

 linkedin.com/company/krais/



